



Minto Mine
2017 Spill Contingency Plan

Prepared by:
Minto Explorations Ltd.
Minto Mine
February 2017

Summary of Revisions (2017)

Section Revised	Description of Revision	Reason for Revision
All	<ul style="list-style-type: none"> Updated dates and references to previous years SCP. 	<ul style="list-style-type: none"> Annual review and update
3.0	<ul style="list-style-type: none"> Added reference to Type "B" Water Use License, and; Changed structure of section to better separate the references to various licenses and regulations. 	<ul style="list-style-type: none"> To enhance relevant to all licenses, and improve readability
3.2	<ul style="list-style-type: none"> Updated reference version of the Emergency Response Plan. 	<ul style="list-style-type: none"> Annual review and update
4.0	<p>Updated Table 4-1 with the following:</p> <ul style="list-style-type: none"> Changed "non-poisonous gases" to poisonous gases, updated TDG code, and quantity; Removed reference to "non-corrosive gases"; and, Added quantity of "> 50 litres" for threshold quantity for Misc. Dangerous Goods (TDG Class 9.1) 	<ul style="list-style-type: none"> To comply with Schedule A of Yukon Environment Act (1996/193)
4.1	<ul style="list-style-type: none"> Updated who is responsible for issuing the Environmental Incident Notification (previously Environment department). 	<ul style="list-style-type: none"> To incorporate procedure change in 2016
4.2	<ul style="list-style-type: none"> Changed listed items for 24-Hour Spill Report line from dashes to bullets. 	<ul style="list-style-type: none"> Improve readability
4.2	<ul style="list-style-type: none"> Clarified when Environment Canada should be contacted. Table 4-2: updated contact information for EMR (Matthew Jenner); Table 4-2: updated contact information for SFN (Jennifer Lee), and; Table 4-2: corrected spelling for Environment Canada contact (Travis Teel). 	<ul style="list-style-type: none"> To ensure procedure and external contact information is current.
5.3	<ul style="list-style-type: none"> Provided file location for the Minto Mine Spill Response Procedure and the LTF Standard Operating Procedure. 	<ul style="list-style-type: none"> To document where relevant files can be accessed.
6.0	<ul style="list-style-type: none"> Removed sentence "Further training and skill development will take place in Spill Response Exercise to be staged in 2016" as it was no longer relevant. Added a reference to loaner spill kits. Updated Figure 6-1 to account for new/changed spill kit locations. Updated Table 6-1 with revised contents of spill kits and addition of loaner spill kits. Added information and picture about purchased Alpha Folding Weir Skimmer. 	<ul style="list-style-type: none"> Annual update of information
7.1.7	<ul style="list-style-type: none"> Changed section title from "KPIs and Scheduled Re-Training" to "Training KPI's". 	<ul style="list-style-type: none"> Improve document readability and relevance.

Table of Contents

1	Introduction	1
1.1	Project Description.....	1
2	Definitions.....	4
3	Purpose and Scope	4
3.1	Purpose	5
3.2	Scope.....	5
3.2.1	Hardcopy Locations.....	6
4	Communication and Spill Reporting	6
4.1	Internal Reporting (All Spills)	7
4.2	External Reporting (Reportable Spills Only).....	7
5	Spill Action Plan.....	10
5.1	Spill Response Procedures: Non-Emergency	10
5.2	Spill Response Procedures: Emergency	10
5.2.1	CANUTEC Transport Canada	11
5.2.2	Surrounding and Downstream Communities	11
5.2.3	Public Relations.....	12
5.3	Disposal and clean-up	15
6	Spill Response Supplies.....	16
7	Spill Prevention and Response Training.....	20
7.1	Existing Spill Prevention and Response Training	20
7.1.1	Orientation.....	20
7.1.2	“Big 6” Training	20
7.1.3	Targeted Practical Training	20
7.1.4	Training for Fuel Handling Employees	21
7.1.5	ERT Training	21
7.1.6	Emergency Spill Response Drills.....	21
7.1.7	Training KPI’s.....	22
8	Routine Maintenance and Monitoring.....	23
9	References	24

List of Tables

Table 4-1: Reportable Spill Thresholds	7
Table 4-2: Contact Information for Minto Personnel and External Agencies.....	8
Table 5-1: Disposal and Movement of Contaminated Material from Spill Sites.....	15
Table 6-1: Spill Kit Contents	16
Table 6-2: Spill contingency equipment located at Minto Mine.....	19

List of Figures

Figure 1-1: Minto Mine Area Overview	2
Figure 1-2: Minto Mine Area Overview – Existing and Phase V/VI Proposed Infrastructure	3
Figure 5-1: Minto Mine Emergency Spill Response Command Structure.....	13
Figure 5-2: Minto Mine General Spill Procedure	14
Figure 6-1: Minto Mine Area Overview – Hazmat Storage and Spill Supplies.....	17
Figure 6-2: In-Viro Drum and vacuum unit, 24’ Packman vessel, and Alpha Skimmer for spill response operations.....	18

List of Appendices

Appendix A: Spill Report and Environmental Incident Report Forms

Appendix B: Reporting Threshold, Special Precautions, PPE Requirements, and Cleanup and Disposal Methods

Appendix C: ERT Response to HazMat Spills

Appendix D: Tug and Barge Emergency Contingency Plan

1 Introduction

Minto Mine (administered by Minto Explorations Ltd. (Minto)) is a high-grade copper and gold mine that is located 240 km north of Whitehorse, Yukon. Operations started in October 2007. The mineral deposits mined at the site were identified during exploration programs occurring in the area in the 1970's; exploration activities occurred sporadically since that time until construction of the mine and related facilities began in earnest in 2006.

This Spill Contingency Plan (SCP) is an update to the previous SCP, submitted in February 2016. The content of this SCP is derived from the *Plan Requirement Guidance for Quartz Mining Projects* (Yukon Government, 2013). The SCP has been updated annually and submitted as part of Minto's Water Use Licence and Quartz Mining Licence annual reports.

The purpose of the SCP is to establish guidelines for staff, contractors and suppliers working at the site with a formal framework of actions to be taken when responding to spills during mine operation. The SCP includes practices and planning of future efforts to further reduce the potential for environmental contamination and other spill-related impacts. The SCP describes the fuels, chemicals and other materials used at the Minto Mine, reporting thresholds for those materials, a spill action plan for responding to unintentional spills of those materials, reporting sequences and forms, training requirements, spill prevention activities and routine monitoring and maintenance.

1.1 Project Description

Minto Explorations Ltd. (Minto), a wholly owned subsidiary of Capstone Mining Corporation (Capstone), owns and operates the Minto Project located 240 km (150 miles) northwest of Whitehorse, Yukon. The Minto Mine is a high-grade copper and gold mine with ongoing operations since October 2007. The Project area encompasses the Minto Creek Valley which collects and drains in to the Yukon River (Figure 1-1). The Minto Mine is currently in Phase V/VI of operations. An overview of major infrastructure at the Minto Mine and the expansion of Phase V/VI is shown on Figure 1-2.

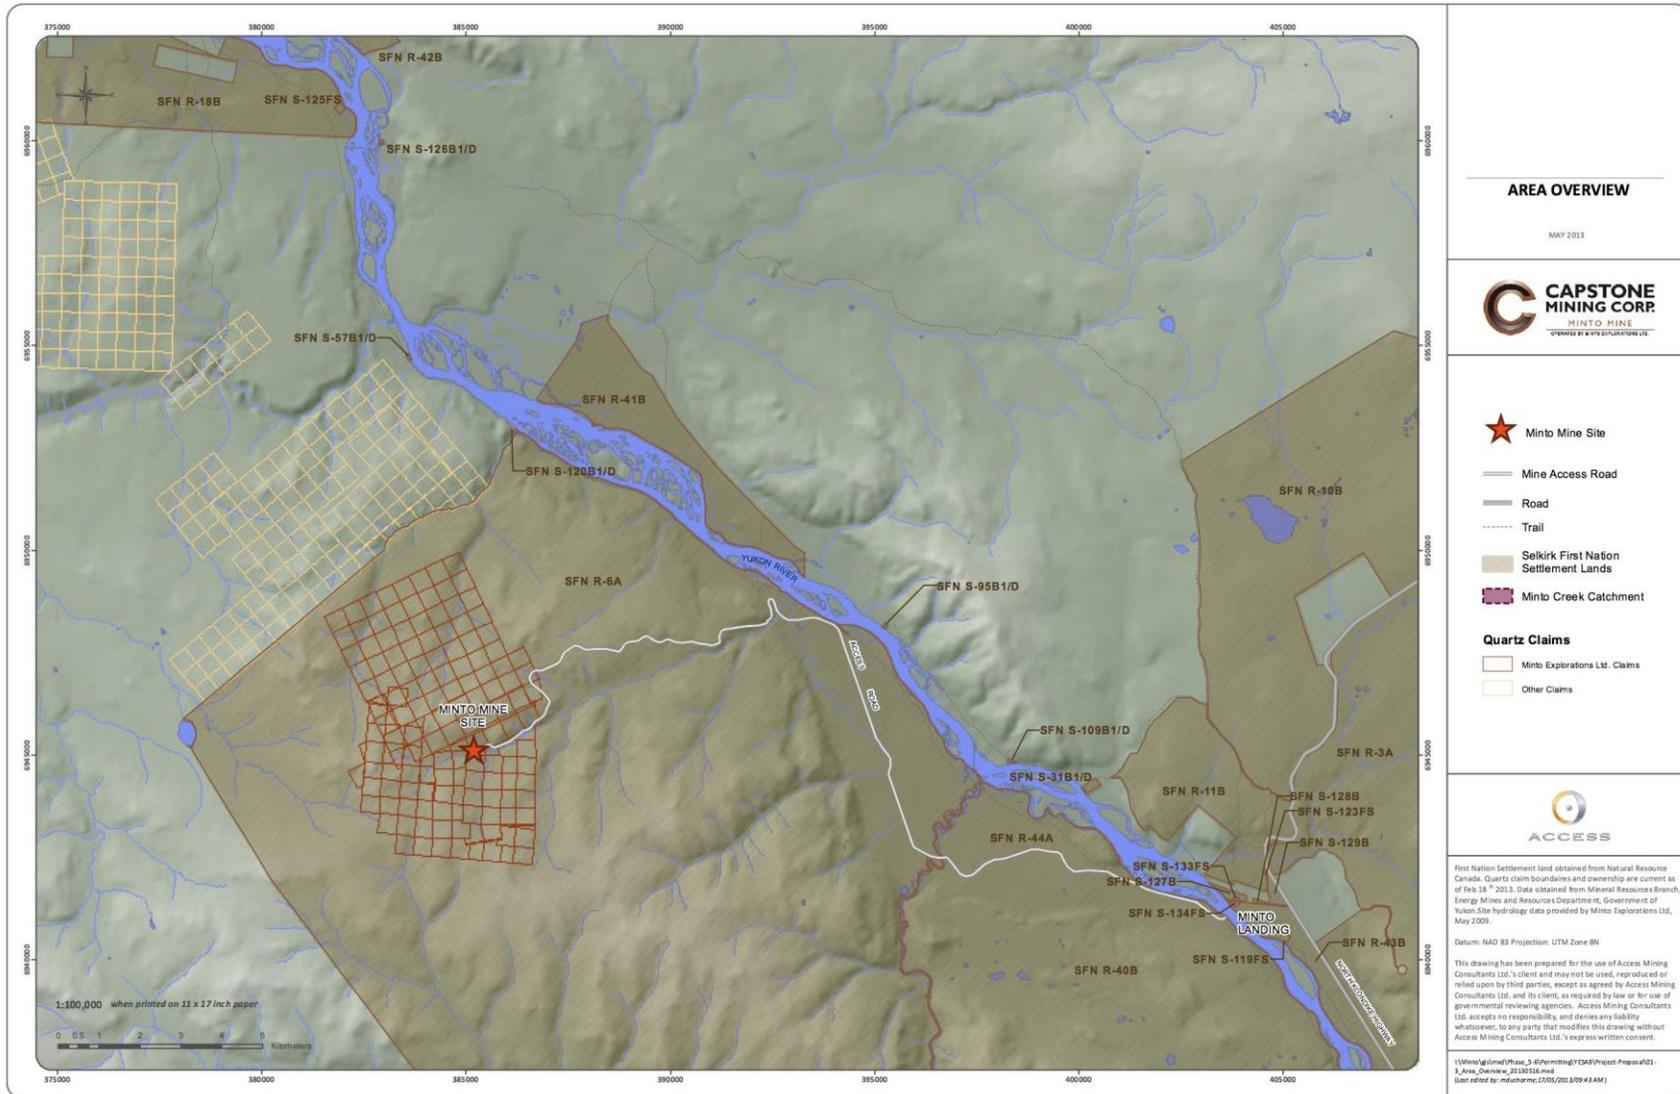


Figure 1-1: Minto Mine Area Overview

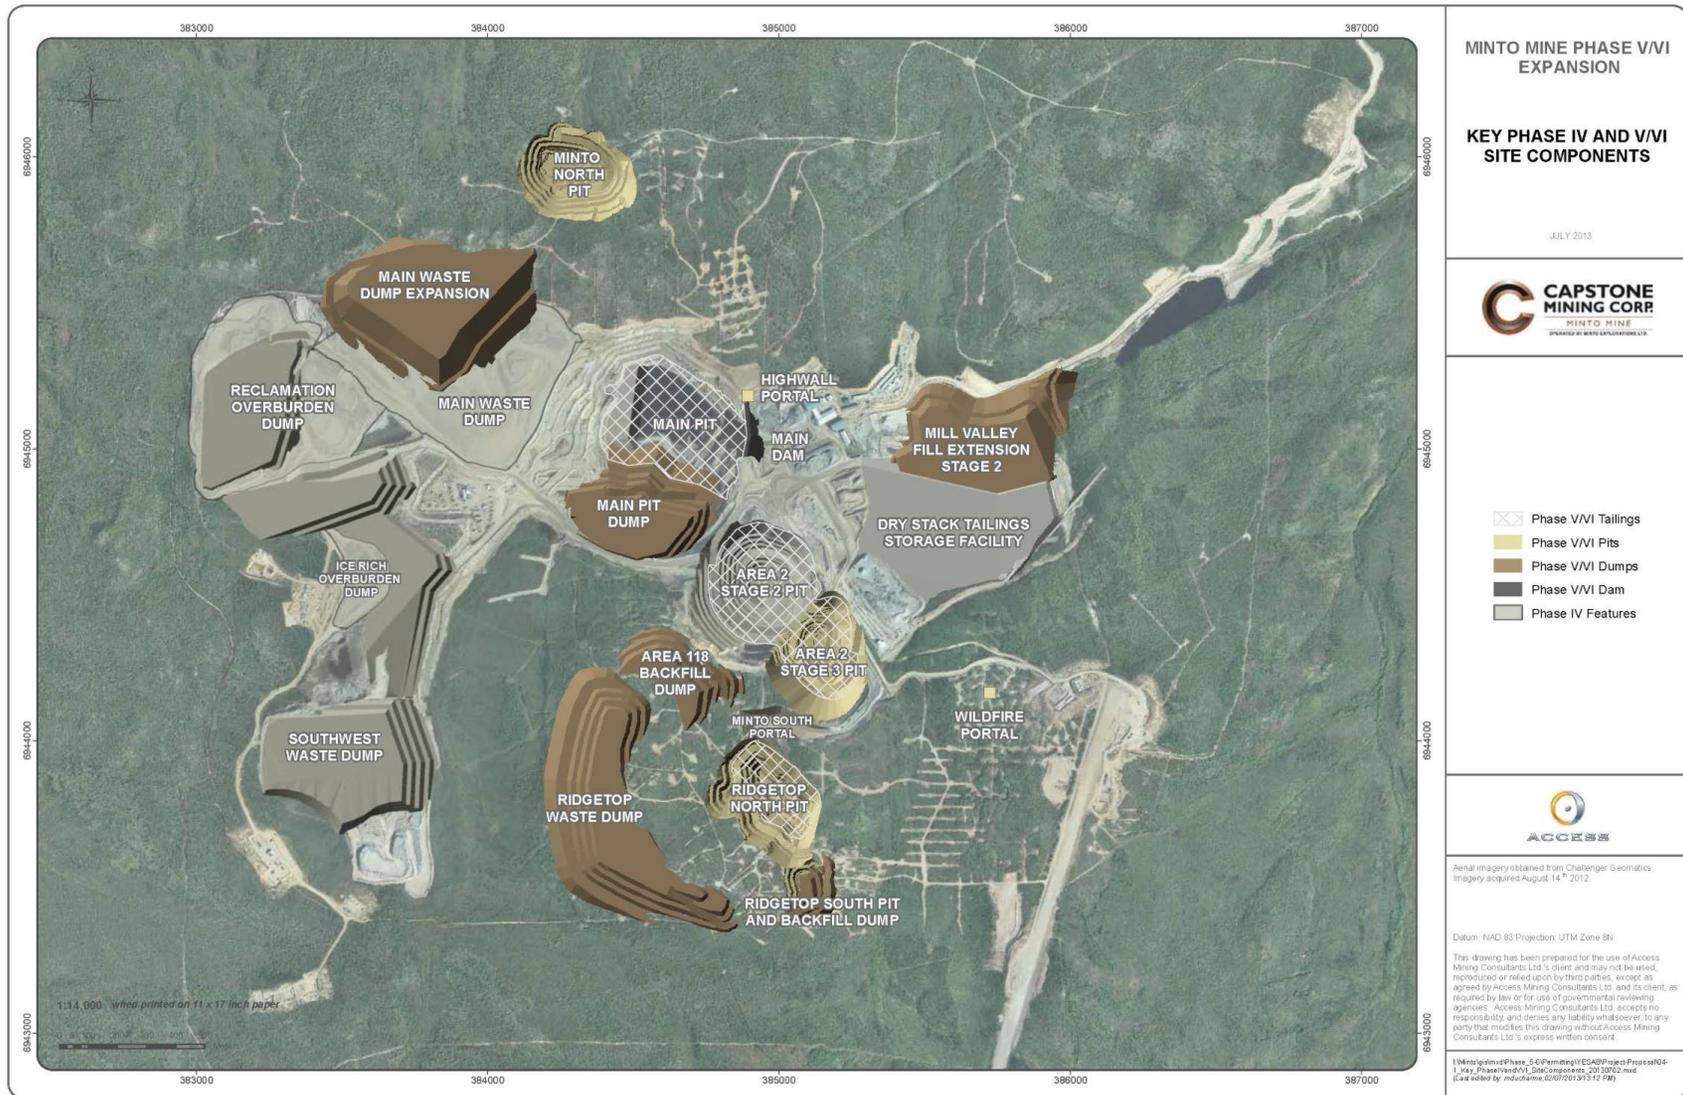


Figure 1-2: Minto Mine Area Overview – Existing and Phase V/VI Proposed Infrastructure

2 Definitions

The following definitions apply to the components of the SCP outlined herein.

Dangerous Good - A product, substance or organism included by its nature or by the regulations in any of the classes listed in the schedule to the act (*Yukon Transportation of Dangerous Goods Act*).

Deposit out of the normal course of events - A deposit that can reasonably be expected to occur at the mine and that can reasonably be expected to result in damage or danger to fish habitat or fish or the use by man of fish, and the identification of the damage or danger (*Metal Mining Effluent Regulations, Part 3, SOR/2002-222*).

Discoverer - The person that discovers an incident that could possibly result in a spill or has resulted in a spill.

Spill - A release of a substance in to the natural environment that is abnormal in quantity or quality in light of all circumstances of the release; or is in excess of an amount specified in the regulations (*Yukon Environment Act, Part 11*):

Emergency Spill - A release of a hazardous product where there is potential for that product to enter a waterway or cause significant danger to life, health or environment.

Non-Emergency Spill - All spills that do not meet criteria of an *emergency spill* and that the responsible party is competent to manage safely and efficiently in terms of assessment, prevention, containment and clean-up.

Substance - A hazardous substance, pesticide, contaminant or special waste often referred to as a “**deleterious substance**”.

3 Purpose and Scope

Minto will ensure that all requirements related to Spill Response and reporting within these documents are implemented throughout the property for the life of mine. If statutory and regulatory responsibilities change over time updating of this Plan will result.

This SCP is prepared in support of:

- Minto’s Type “A” Water Use License QZ14-031 (WUL) and Type “B” Water Use License MS15-094, which state that:

“The Licensee shall apply the relevant procedures in the Spill Contingency Plan. The Licensee shall review the spill contingency plan annually and shall provide a summary of that review, including any revisions to the plan, as a component of the annual report.”

- *Part 3 – Deposits Out of the Normal Course of Events, Section 30 of the Metal Mining Effluent Regulations (MMER), which indicates that:*

“The owner or operator of a mine shall prepare an emergency response that describes the measures to be taken in respect of a deleterious substance within the meaning of subsection 34(1) of the Act to prevent any deposit out of the normal course of events of such a substance or to mitigate the effects of such a deposit.”

- *Part 7 – Emergency Response Assistance Plans and Security Plans of the Transportation of Dangerous Goods Act:*

“No person shall import, offer for transport, handle or transport dangerous goods in a quantity or concentration that is specified by regulation — or that is within a range of quantities or concentrations that is specified by regulation — unless the person has an emergency response assistance plan that is approved under this section.”

- Satisfying the requirements of the Quartz Mining License QML-0001 Schedule B, that requires:

“A plan that describes the measures designed to minimize the potential impact to the environment following a fuel or chemical spill.”

The SCP will apply to Minto Mine and the main access route for one year, whereby the owner or operator shall update and test the SCP to ensure it continues to meet the requirements of both the WUL, subsection 30(2) of the MMER, and the QML.

3.1 Purpose

The purpose of the SCP is to outline a general set of procedures to be followed to assess, prevent, contain and clean-up a spill at the Minto Mine. For procedures to be effective, Minto must ensure that employees and contractors, through experience and training, possess the skills necessary to safely assess, prevent, contain and clean-up a spill or potential spill. These procedures are necessary to ensure continuity and develop the foundation for a robust and effective SCP. The SCP is also designed to establish clear reporting and clean-up procedures as they apply to emergency and non-emergency spills and incidents.

This document also addresses opportunities to improve spill preparedness, response, and mitigation for deposits out of the normal course of events that have the potential to impact the Yukon River and its tributaries within the project site.

All Minto employees and contract staff must be familiar with the general spill reporting procedures outlined in this document and will be introduced to them as part of their site orientation.

3.2 Scope

The objectives of the SCP are to:

- identify potentially hazardous materials located on site;
- identify spill prevention measures;

- establish a high order of preparedness in the event that a spill occurs;
- ensure an orderly and timely decision-making, response and reporting process; and
- describe current and planned protective measures for all areas of the Mine Site

The *Minto Mine Emergency Response Plan* (Minto, 2017) contains other information that relates to Emergency spill procedures. The Emergency Response Team (ERT) and members of the Environmental Department have been trained on responding to Hazmat Spills. It is beyond the scope of this document to define the specific Spill Response Procedures and decision loops involved in an ERT response. Any details pertaining to a response from ERT to assess, prevent, contain and clean-up a spill at a spill incident is the responsibility of the Site Safety Department. General procedures for spill response procedures to emergency spills will be detailed herein.

3.2.1 Hardcopy Locations

Copies of the SCP are kept on-site at all times in the following locations: Mill Control Room; Site Safety Office; Environmental Office; General Manager's Office; Site Services Office; and on the Copper Queen Tug. Contact information is provided in Table 4-2.

4 Communication and Spill Reporting

Any spill that occurs at the Minto Mine site must be reported through the internal reporting chain of command and follow the procedures for assessment, prevention, containment and clean-up and reporting. Should a spill exceed the thresholds set by the Yukon Government (Table 4-1) then it must be reported to external authorities.

A spill in excess of the thresholds outlined in Table 4-1 or any spill that is abnormal in quality or quantity is considered a "reportable spill" under the *Yukon Spill Regulations* (O.I.C. 1996/193), pursuant to the *Environment Act*.

Table 4-1: Reportable Spill Thresholds

Product	TDG ¹ Code	Threshold Quantity
Explosives	1	Any amount
Flammable gases	2.1	> 100 litres
Non-flammable gases	2.2	> 100 litres
Poisonous gases	2.3	Any amount
Corrosive gases	2.4	Any amount
Flammable liquids	3	> 200 litres
Flammable solids	4	> 25 kg
Spontaneously combustibles	4	> 25 kg
Dangerous when wet	4	> 25 kg
Oxidizers	5.1	> 50 kg or 50 litres
Organic peroxides	5.2	> 1 kg or 1 litre
Poisonous substances	6.1	> 5 kg or 5 litres
Corrosive materials	8	> 5 kg or 5 litres
Miscellaneous Dangerous Goods	9.1	> 50 kg or 50 litres
Special wastes	9.3	> 5 kg or 5 litres

1. TDG = *Transportation of Dangerous Good Regulations* (Government of Canada, 1985)

4.1 Internal Reporting (All Spills)

All spills (whether reportable externally or not) must be reported by the discoverer to their immediate supervisor and then to either Site Safety or the Environmental Department by radio or telephone following assessment of the scene. The supervisor of the responsible department will issue an Environmental Incident Notification, with assistance from the Environment department, to notify the site and its directors including senior management. This typically occurs concurrently with spill response (prevention, containment and clean-up) activities.

Following the spill response, responsible department supervisors are required to document the spill on an Environmental Incident Report, available through the Environmental Department, and provided in Appendix A. The report requires inclusion of photos, a description of clean-up activities, subsequent actions, identifies root cause and determines any required corrective actions.

4.2 External Reporting (Reportable Spills Only)

Under federal and territorial regulations, the environmental lead will call the 24-hour Yukon Spill Report line should a spill of a reportable quantity occur (Table 4-1). Although several government agencies at the federal, territorial and municipal levels may ultimately be informed, only the Yukon 24-Hour Spill Report line is required for reporting purposes. The environmental lead will ensure that the appropriate information is collected before reporting to the Spill Report line.

Any spill of an amount greater than those listed in Table 4-1 or a spill of any amount that enters the Yukon River or a tributary of the river is a “reportable spill”.

The following information should be provided to the 24-Hour Spill Report line:

- Name
- Phone number
- Product spilled
- Quantity spilled
- Quality of product (thin, viscous etc.)
- Location of spill
- Distance to water
- Distance to drinking water wells
- What happened
- Responsible party
- Actions to contain the spill

When reporting the spill to the Spill Report line, the environment lead will obtain the Environment Yukon Spill Reporting Number and first/last name of the person whom the report has been made to (in the event of a reporting discrepancy).

Minto will also contact: the Selkirk First Nation Lands Director; and Energy Mines and Resources Client Services and Inspections via email or phone after discovery of a reportable spill. Should the spill enter a waterway or be categorized as a major spill, Minto will also contact Environment Canada. A detailed written report will be submitted to the regulatory authorities within 10 days after the event. The contact information for the various Minto employees, emergency response and external reporting personnel is provided in Table 4-2.

Table 4-2: Contact Information for Minto Personnel and External Agencies

Resource	Email	Contact Number
Minto Internal Communications Contact Info		
Health and Safety Department	safety@mintomine.com	604 759-0860 ext. 4644
Environmental Department	minto_environment@mintomine.com	604 759-0860 ext. 4659
Ron Light, General Manager	ronl@mintomine.com	604 759-0860 ext. 4639
Ryan Herbert, Environmental Manager	ryanh@mintomine.com	604 759-0860 ext. 4659

Resource	Email	Contact Number
----------	-------	----------------

Emergency Phone Contacts		
Yukon 24- Hour Spill Line		867 667-7244
CANUTEC-Dangerous Goods Help (Transport Canada)		1-888-CANUTEC or 613 996-6666
Fire Department – Pelly Crossing (Emergency)		867 537-3000
Police – Pelly Crossing		867 537-5555
Health Centre - Carmacks		867 863-4444
Hospital – Whitehorse		867 667-8700
Fire Department – Whitehorse		867 668-8699 or 867 668-2462
Police – Whitehorse		867 667-5555
YG Department of Environment, Water Resources Branch		867 667-3227
YG Environmental Protection Branch		867 667-3436
Selkirk First Nations, George Magrum, Lands Manager		867 537-3331
YG EMR, Client Services and Inspections		867 667-3199
External Reporting and Contacts for Submission of Spill Reports		
YG EMR, Matthew Jenner, Natural Resources Officer - Mining	Matthew.Jenner@gov.yk.ca	867 863-5271
Selkirk First Nation, Jennifer Lee, SFN Director of Governance	governance@selkirkfn.com	867 537-3331 ext. 213
YG Environmental Health Services, Craig Van Lankveld, Environmental Health Officer	craig.vanlankveld@gov.yk.ca	867 667-8316
Environment Canada, Travis Teel, Enforcement Officer	Travis.Teel@ec.gc.ca	867-393-6705

5 Spill Action Plan

Implementation of the spill action plan requires knowledge of spill response supplies and locations, spill response procedures (Sections 5.1 and 5.2) and clean-up protocols (Section 5.3). In addition to the internal and external reporting requirements, spills must further be categorized as “emergency” or “non-emergency” incidents as the action plans and reporting requirements will differ according to the type of spill.

5.1 Spill Response Procedures: Non-Emergency

The majority of spills that are likely to occur on the Minto Mine Site will include a simple stepwise process initiated by the discoverer. If the safety at the scene is in doubt then it is imperative that the Site Safety department is notified immediately. A “non-emergency” spill is defined as a spill of any product that the discoverer, or other personnel within close proximity, of the incident can competently, safely, and efficiently manage in terms of assessment, prevention, containment and clean-up. This typically includes fuels, blasting agents, oils, lubricants or coolants and many of the reagents involved in mill operations. Once the scene is assessed for safety by the discoverer or supervisor and deemed non-emergency, they will prevent, contain and clean-up and contact the environmental team as soon as practical. If assistance is required to deal with the incident, the environmental team is to be notified by radio/telephone immediately.

A complete inventory of Dangerous Goods stored and used at the Minto Mine, including details on material handling and clean-up, reporting thresholds, special precautions, PPE requirements, and disposal methods is provided for reference during spill response activities (Appendix B).

5.2 Spill Response Procedures: Emergency

An “emergency spill” is a release of a hazardous product where there is potential for that product to enter a waterway or cause significant danger to life, health or environment. When a spill is discovered, the first step is to assess the scene for safety and **if safe to do so** immediately control and contain the spill by any means necessary. If the discoverer or other personnel within close proximity of the incident do not have the required training, resources or equipment to deal with the incident then the individual must report a “Code 1” callout. This protocol will initiate response of the Safety Department, Environmental Lead and the Emergency Response Team. The Emergency Spill Response Command Structure and General Spill Procedure are detailed in Figure 5-1 and Figure 5-2, respectively. If the scene is safe and the discoverer and the immediate supervisor have the means necessary to control, contain and recover the spill then they should proceed as such.

Once called via a “Code 1” the Safety Coordinator/Medic will respond to the scene and conduct an initial assessment and assume command of the scene. If the Safety Coordinator/Medic is required to treat patients, command is transferred to the Health and Safety Superintendent/Officer or Emergency

Response Team Captain. Unified Command Structure will be initiated once the General Manager, Area Manager, or Environmental Lead is on scene. The Unified Command Structure is a cooperative effort command between the General Manager, Health and Safety Superintendent/Officer, Area Manager of involved Department and the Environmental Lead. Transfer of command includes a detailed verbal report of the incident and activities conducted and underway.

A “Code 1” Protocol initiated by an emergency spill will trigger the specific spill response procedure based on the product type, quantity and environmental and safety conditions.

Initial spill response will be conducted in accordance to *Transport Canada’s 2012 Emergency Response Guidebook* (Transport Canada, 2012). This Guidebook will assist Incident Command with information to identify the material, use the guide to reference potential hazards, public safety and emergency response information. The *Table of Initial Isolation and Protective Action Distances* will be used to dictate isolation and protection for large and small spills. However, this is not a comprehensive spill mitigation and response document and will only assist responders in making initial decisions upon arriving at the scene of a dangerous goods incident. It should not be considered as a substitute for emergency response training, knowledge or sound judgment. The *Emergency Response Guidebook* does not address all possible circumstances that may be associated with a dangerous goods incident. The *Minto Mine Emergency Response Plan* (Appendix C) has additional specific procedures for responding to the most commonly transported and hazardous materials including Nitric Acid, Gasoline, Diesel, Ammonium Nitrate, Sodium Sulfide and Propane.

In addition to on-site response, Minto, through its carriers of dangerous goods, has contracts in place with spill responders. These are full service response agencies that have commitments to mobilize fully trained emergency response teams and equipment 24 hours a day, 7 days a week.

5.2.1 CANUTEC Transport Canada

In the event that a spill requires additional technical resources Minto is registered with CANUTEC, a division of Transport Canada, for 24 hour Spill Response support and information to deal with emergency situations. If a spill occurs beyond the boundaries of the Minto property, the owner of the transportation firm and the owner or consignor of the dangerous goods will communicate with the regulators. For incidents that occur on the Minto property, the Environmental Department will ensure reporting to regulators is performed accordingly.

5.2.2 Surrounding and Downstream Communities

Notification of downstream water users of a spill, if required, is the responsibility of the Yukon Government, Environmental Protection Branch. Minto will additionally notify the authorities including police and fire departments and the Selkirk First Nation community of Pelly Crossing.

5.2.3 Public Relations

The General Manager is the designated spokesman for Minto. The General Manager may delegate his responsibility for public relations if required to do so by the scale of the incident.

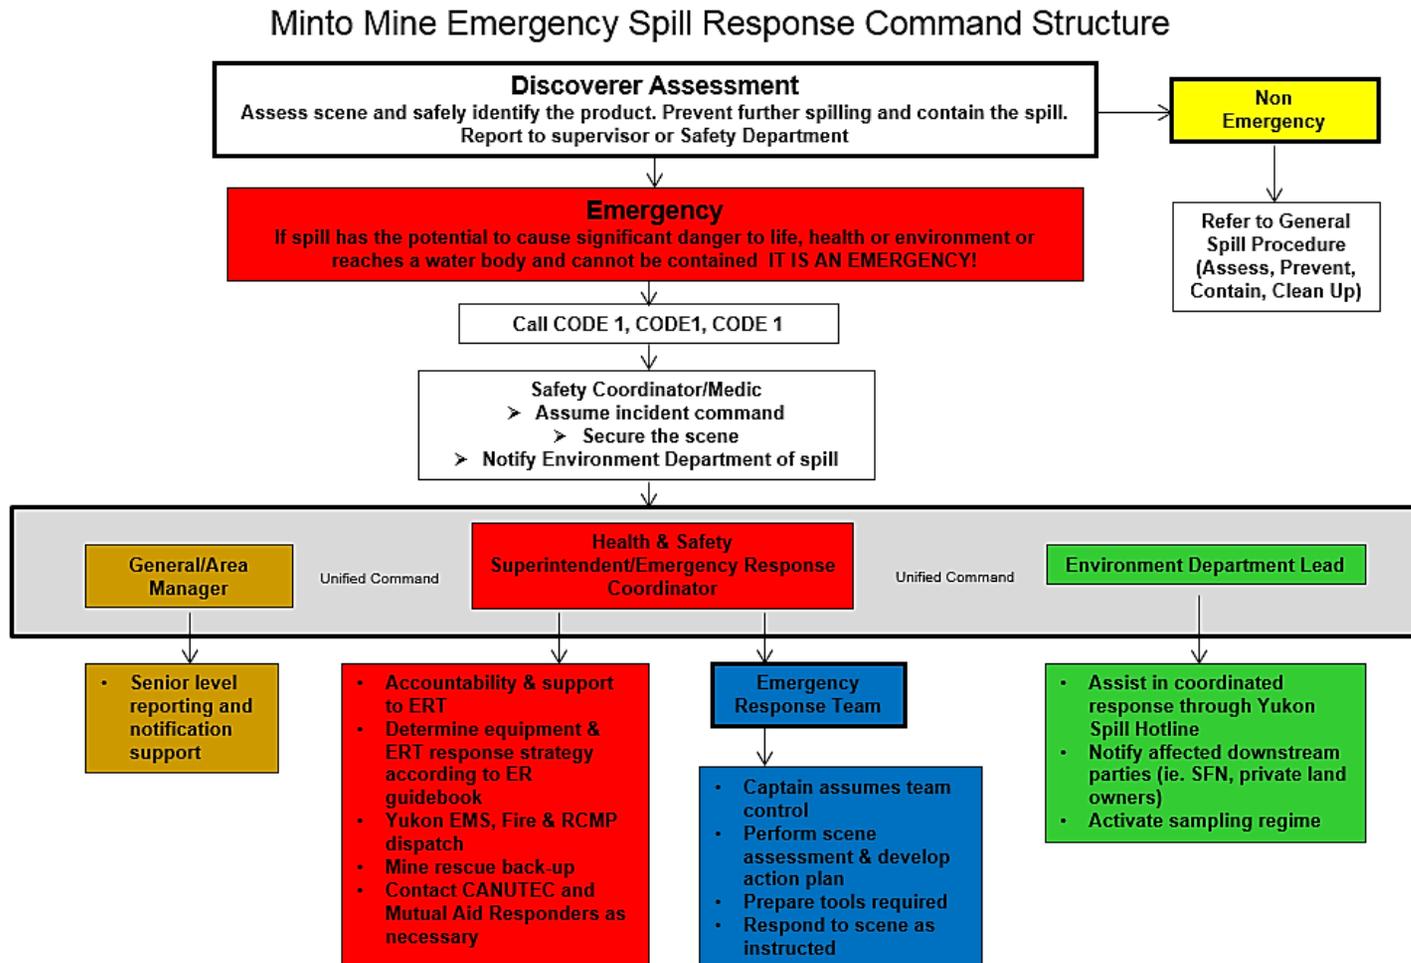


Figure 5-1: Minto Mine Emergency Spill Response Command Structure

Minto Mine General Spill Procedure (Assessment Prevention Containment Clean-up)

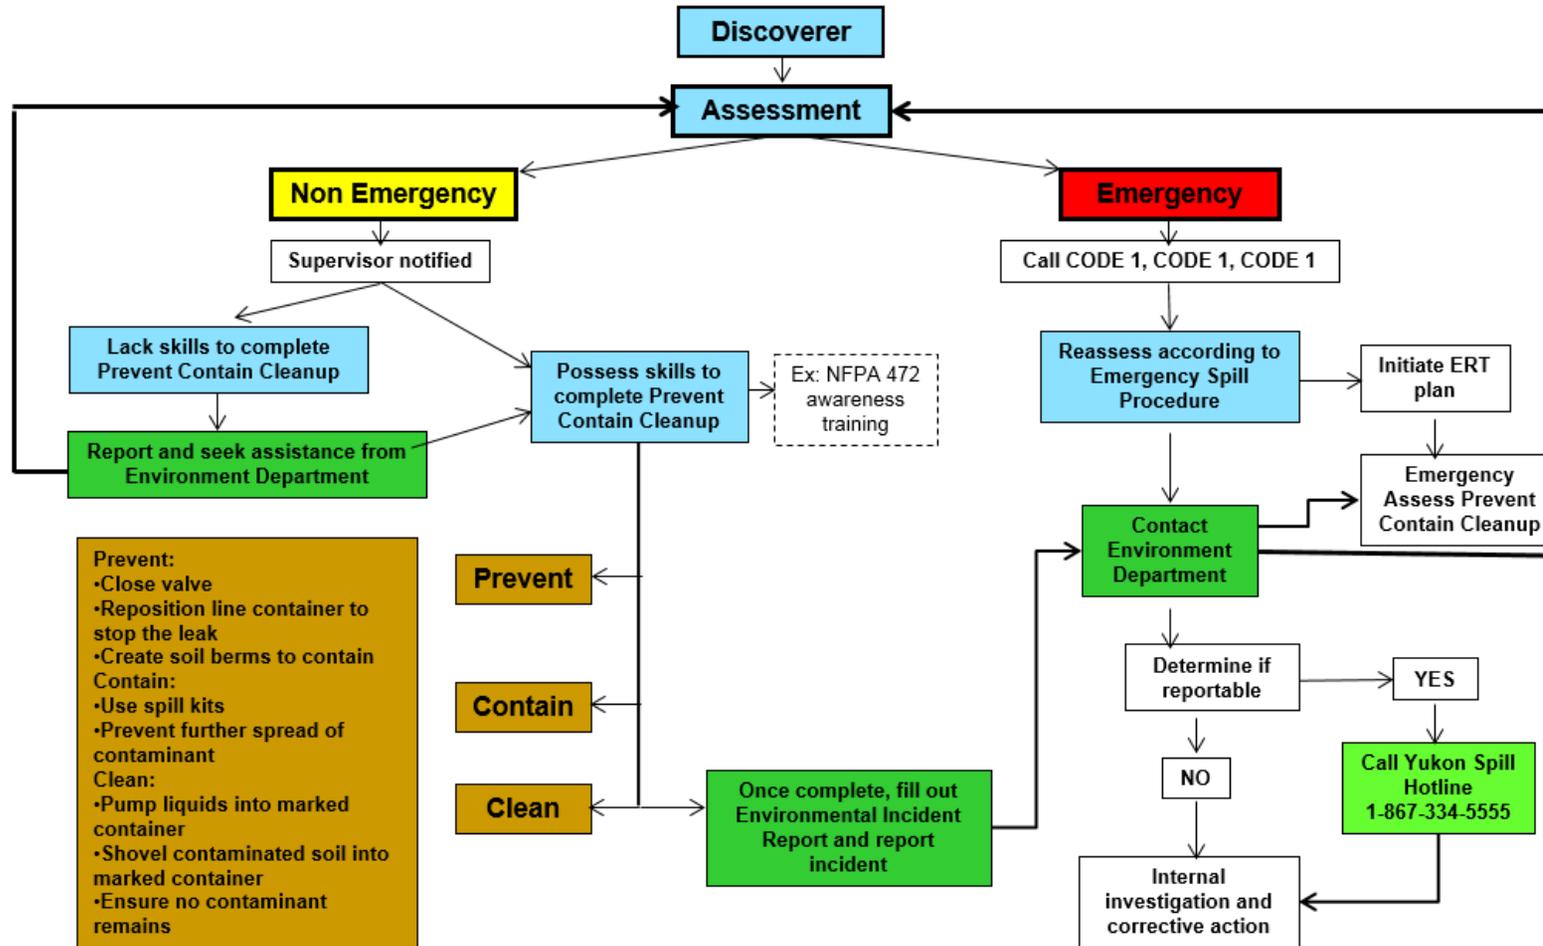


Figure 5-2: Minto Mine General Spill Procedure

5.3 Disposal and clean-up

Disposal and treatment methods of contaminated material are outlined below, and are further detailed in the *Minto Mine Spill Response Procedure: Non-emergency spills on soil* and the *Minto Mine Land Treatment Facility Standard Operating Procedure* documents. The Minto Mine Site has a Land Treatment Facility to accept incoming contaminated material from petroleum hydrocarbon and ethylene glycol spills. Depending on the state and substrate of the surface material, the clean-up and disposal location will differ. Brief practical descriptions of the clean-up procedures are summarized in Table 5-1.

Table 5-1: Disposal and Movement of Contaminated Material from Spill Sites

WASTE TYPE	DESCRIPTION	MOVEMENT OF MATERIAL FROM SPILLS
Oil or Glycol Contaminated Soil	Soil, Organics, and granular material (avoid coarse rock) contaminated as a result of a hydrocarbon or glycol spill	Contaminated soil will be transferred to the Land Treatment Facility. Contaminated soil will first be placed in the staging cell and labelled to be later categorized and treated. Contact Environment dept. before dropping off material in the Land Treatment Facility. Small spills will be stored in a composite pile in the staging area. Larger spills will be stored separately in staging while waiting for lab results.
Oil or Glycol Contaminated Rock	Blasted rock and coarse material and/or bedrock, contaminated as result of a hydrocarbon spill or glycol spill	If blasted rock contains ore and has been cleared by Mill operations ore will be processed through the mill. Non-ore containing rock will be placed in the main pit and in-situ bioremediation will be applied to the pile.
Oil or Glycol Contaminated Snow/ Ice/Water	Snow, Ice, and/or Water that has been contaminated as a result of a hydrocarbon spill or glycol spill	Contaminated snow/water will be transferred to the Land Treatment Facility. The contaminated product will be placed in a separate pile in the cell.

**** Any amount of material that has more than 30,000 ppm oil or glycol is considered special waste and must be disposed of off-site to a Special Waste Facility**

6 Spill Response Supplies

Spill kits (yellow and blue drums) are located throughout the Minto Mine Property at locations indicated in Figure 6-1. Additionally, there are blue drums located at the km 12 gravel pit, Big Creek and at the east and west terminals of Minto Landing. The contents of the yellow and blue barrels are summarized in Table 6-1. Spill kits are also supplied for each heavy and light truck at the Minto Mine. Contractor supervisor trucks have spill kits permanently affixed to the truck body. All contract trucking agencies coming to the mine are required to carry spill kits within or affixed to the truck. Spill kits are loaned to short term visitors if required.

Table 6-1: Spill Kit Contents

Spill Kit Item	Yellow Barrel	Blue Barrel	Yellow Truck Bag	Loaner Spill Kit (20 L Pail)
Tyvek splash suits	2	2		
Chemical master gloves	2	2	1	2
Garbage bags with ties	5	5	3	1
Oil only booms (5" x 10')	2	4	1	
Oil only mats (16" x 20")	50	50		10
Universal sorbent mat	20	20	10	5
Sorbent socks	10	10		1
Tarp	1	1		
Duct tape	1	1		
Utility knife	1	1		
Field notebook and pencil	1	1		
Instruction sheet (laminated)	1	1	1	1

Heavy machinery at the mine site is available for use in spill response and clean-up, as required under contract. Additionally, Minto has a 1991 Chevrolet Top Kick Fire truck with a 3200 litre/minute pump with 3800 litre supply tank and 3000 litre drop tank. This truck can support all spill response activities with SCBA, Class A and B foam capabilities, decontamination needs, as well as fire suppression/protection tools and equipment common to a truck of this nature. All ERT members are competent with the operation of this fire truck and related equipment in accordance with NFPA standards.

In 2013, Minto, on advice from Emergency Response Action Plan providers, procured a 20 foot Hazmat trailer and a helicopter-portable In-Viro-Drum vacuum unit (Figure 6-2) capable of being transported to locations not reachable with a vacuum truck. It has a liquid cooled three cylinder Kubota diesel engine and 250 CFM non-sparking blower, which makes it safe to vacuum flammable liquids and solids from water or dry land. It comes with a Double Port Vac Drum that allows for transfer of product from the drum to one of our 9500 litre bladders, while the drum continues to be filled. This system allows for quick, efficient and effective clean-up of hazardous products from hard to reach locations.

In 2016, Minto purchased a S.S. Alpha Adjustable Folding Weir Skimmer. Weir skimmers float on the surface of water and are designed to remove pollutants from the surface of calm or sheltered waters and shore line areas. Connected to a shore-based portable pump (e.g. Honda), contaminants can be removed from the water surface and transferred to a drum or other container for proper disposal.

Figure 6-2: In-Viro Drum and vacuum unit, 24' Packman vessel, and Alpha Skimmer for spill response operations.



Minto Mine also acquired a 24 foot Packman man boat, which is described, further in the “Barge Emergency Contingency Plan” (Appendix D).

Spill contingency equipment and earth moving equipment located at Minto Mine are listed in Table 6-2. All contractor equipment is available for use in spills and clean-up operations.

Table 6-2: Spill contingency equipment located at Minto Mine

Quantity of Units	Equipment	Quantity of Units	Equipment
1	416 Backhoe	1	Assorted Wooden Plugs
1	3800 Litre Vacuum Truck	4	773DTruck
Various	Dozers, Excavator, Loaders	9	777 Truck
1	In-Viro Drum Portable Vacuum unit	1	Hazmat trailer 20'
2	9500 Litre bladders	1	Top Kick fire truck
1	24' Packman Response Vessel	500'	Sorbent Boom (various sizes)
2	10,000 Litre Fuel Trucks	1	Storage Sea Can at Landing
1	Roll Over Kit	3	Trash pumps
1	Pipe Plug kit	1	S.S. Alpha Adjustable Folding Weir Skimmer Pump

7 Spill Prevention and Response Training

Education and training are critical to the success of any site-wide initiative, and the most important tool to ensuring the success of the SCP. Minto has a comprehensive training program in place that ensures all workers and supervisors are aware of their responsibilities and the practices that personnel and contractors must adhere to. Records are kept of the names of all employees or contractors that receive training, tracked through either the Simply Safety software program or in the Environmental Department tracking sheets. Annual re-training is scheduled for all Minto and major contractor employees.

7.1 Existing Spill Prevention and Response Training

Employees are trained to understand the potentially hazardous situations that spills can create with respect to the health and safety of workers and the environment. They are trained to understand responsibilities as employees to Assess, Prevent, Contain, and Clean-up as well as to report any spills. The SCP is made available to all employees and employees will be advised of revisions or changes to the SCP.

7.1.1 Orientation

Employees and visitors are required to sign off on the environmental policy as part of the employee, contractor and visitor orientations that include a summary of the response required when a spill has occurred. The orientation has a strong focus on ensuring proper reporting of spills, so that the appropriate response and clean-up can occur.

7.1.2 “Big 6” Training

As part of the orientation, all Minto employees and major contractors receive training that is a computer based PowerPoint presentation, followed by a written test. The “Big 6” package focuses on some of the most common safety training required for site, which includes WHMIS (Workplace Hazardous Material Information System), fall protection, confined spaces, lock out, hot work training and Environmental Awareness. The Environmental Awareness portion of the training is comprised of four modules, with one module dedicated to Spill Response covering reporting and basic steps for assessing, preventing, containing and cleaning-up spills.

7.1.3 Targeted Practical Training

Training sessions are put on by the Environmental Department, and efforts are made to tailor the training to the attending group (i.e. underground miners, surface contractors, site services, etc.). Smaller groups are identified and targeted for specialised spill prevention training that is more job-specific. These include, but are not be limited to; maintenance personnel (mechanics), waste and water truck operators, fuelling personnel, and warehouse workers. Training in smaller groups focusses on spill prevention techniques.

7.1.4 Training for Fuel Handling Employees

Currently there are Safe Work Practices (SWP) designed for bulk fueling at the fuel farm and for fueling of equipment in the field. These SWPs include descriptions of the stepwise procedure for safely performing the task and also includes steps to take for emergency shut-off. Both the procedure and the equipment are audited during Workplace Inspections and Planned Job Observations by immediate supervisors and the Environmental Department.

7.1.5 ERT Training

An Emergency Response Team (ERT) has been established to, among other duties, respond to emergency spills. The Emergency Response Team periodically receives training to the National Fire Protection Association (NFPA) 472 Hazardous Material awareness level, and are required to thoroughly understand this document in order to respond to spills or incidents of a specific nature. This training is required as a foundation to develop site specific contingency planning for response tactics in areas specific to the Minto Mine associated activities that present a risk to the Yukon River and its tributaries.

7.1.6 Emergency Spill Response Drills

Table top exercises and/or field drills will help to prepare the ERT and other mine staff to respond to a major spill safely by identifying any deficiencies in the equipment or processes in place. On October 26th, 2014 a combined field and table top exercise took place with the following objectives:

- Help individuals become more knowledgeable with the ERP and SCP;
- Identify gaps in the plan;
- Improve communication between stakeholders and departments; and
- Learn new ways and better ways to execute the plan.

The announced exercise was initiated to test part of the Emergency Response Plan as it applies to Spills and the SCP. It focused on the crisis, interaction and escalation of problems within:

- Administrative;
- Operational;
- Managerial; and
- Facilities.

The scenario was as follows:

- A tanker truck with pup and trailer of diesel overturns on Oct 26th on icy roads at 3:20pm at south end of Big Creek. It is still dark and it is a Sunday and roads are icy and snowing lightly.

The exercise lasted approximately 2 hours and involved management staff onsite and offsite, the ERT, major contractors, The Yukon Spill Hotline, CANUTEC, Transnorth Helicopters, WCB, Parkland Fuel, and

Quantum Murray. A post-incident debrief revealed both opportunities and successes at the field operations and management level.

7.1.7 Training KPI's

Individuals who receive training are tracked, and training numbers are used as a key performance indicator (KPI) with annual targets. In addition, tracking is used to ensure annual retraining is delivered and statistics measured against key performance indicators.

8 Routine Maintenance and Monitoring

The Fuel Farm is inspected twice monthly for any leakages and, through the Human Machine Interface (HMI) readout, regular inventory is tracked daily to identify any incidental losses. An overfill protection system is installed on the two main diesel tanks using a visual indicator and a relay to the control room that will alarm on the HMI to alert maintenance personnel. The area also receives inspections by a qualified engineer and recommendations are recorded and deficiencies corrected as per the *CCME Environmental Code of Practice for Aboveground and Underground Storage Tank Systems Containing Petroleum and Allied Petroleum Products* (Canadian Council of Ministers of the Environment, 2003).

The tug and barge receive frequent inventory inspections for spill equipment and have had major overhauls in the last few years to ensure that the operation is continually improving. Maintenance activities are also carried out regularly and systems are inspected as per Transport Canada Regulations. The daily start-up procedure includes checking for leaks and ensuring all systems are performing to specifications. Annual maintenance activities have included the following: propeller repairs, controls work, system checks and repairs. Substantive refits have included: cylinder heads, exhaust manifold seals, motor mounts, transmission mounts and replacement of water pumps. A new transmission, propulsion seals and propellers have been installed and aligned. Other improvements have included welding reinforcements on the bow of the barge for landings, electrical upgrades, and the installation of an anchor with hawser.

The open pit mining equipment is outfitted with Wiggins Fast Fuel Systems on newer contractor open pit equipment that is a fail-safe system for overflow protection. All fuel trucks receive a daily walk-around inspection to ensure emergency shutoffs and hatches and tank valves are operating properly and are free of leaks. These are recorded daily.

The Waste Management Area (WMA) is restricted to access between 10-3 pm every Sunday by an attendant familiar with the protocols for waste segregation, incineration, special waste handling and landfilling. The attendant will inspect all loads that come into the WMA to ensure that waste has been properly sorted before any material is off loaded. The Environmental Department is directly responsible for the administration, compliance and procedures associated with the management of waste. They are also responsible for providing support and manpower to prepare shipments for backhauling and to ensure the WMA is maintained in accordance with the Commercial Dump Permit (# 81-005). The Environmental Monitors are responsible for conducting weekly inspections to ensure that the WMA is in compliance.

9 References

Canadian Council of Ministers of the Environment. (2003). *Environmental Code of Practice for Aboveground and Underground Storage Tank Systems Containing Petroleum and Allied Petroleum Products*. Winnipeg: CCME.

Government of Canada. (1985, January 18). Transportation of Dangerous Goods Act SOR/85/77.

Government of Yukon. (1996). Spills Regulation. *Environment Act: Spills Regulation O.I.C. 1996/193*.

Government of Yukon. (2002). Environment Act. *Revised Statutes of the Yukon: Environment Act, RSY 2002, c.76*.

Minto. (2016). *Emergency Response Plan*.

Transport Canada. (2012). 2012 Emergency Response Guidebook. *A Guidebook for First Responders During the Initial Phase of a Dangerous Goods/Hazardous Materials Transportation Incident*.

Yukon Government. (2013, August). *Plan Requirement Guidance for Quartz Mining Projects*. Retrieved from <http://www.yukonwaterboard.ca/forms/quartz/Plan%20Requirement%20Guideline%20for%20Quartz%20Mining%20Projects%20-%20August%202013-kh.pdf>

Appendix A: Spill Report and Environmental Incident Report Forms

Spill Report Form



Spill Name:	
--------------------	--

General Report Information: (To be completed by the supervisor of responsible department or company)

EIR #:		Location of Incident:	
Date of Incident:		Time of Incident:	
Contaminant Type:		Volume of Spill (L):	
Equipment (Type):		Equipment (#):	
Company or Department:		Supervisor	
Hours since last PM:		Proximity to nearest waterbody:	
Previous indication of leak (i.e. Prior Drip) (Yes/No):		Estimated cost of spill:	

Failure of Mechanism: (Check one box below)

Blown Hose		Failed Hose Connection		Human Error	
Unforseen		Blown or Leaking Seal		Unknown	
Other					

Brief Description of Cause: (conditions at time of spill, what was happening at the time, specific direct cause of spill, etc.)

Clean Up Actions Undertaken:

Land Treatment Facility Information: (To be filled out by Environment Department)

Material Moved to LTF (Yes/No):		Material Sampled (Yes/No):		Quantity (m ³):	
---------------------------------	--	----------------------------	--	-----------------------------	--

Notes:	
--------	--

Corrective Actions: (Must fill out for all reportable and preventable spills)

Action Item #	Responsible Department	Corrective Action	Due Date

Reporting Sequence:

First Observer:

Name	Company	Date/Time
------	---------	-----------

Reported To:

Name	Company	Date/Time
------	---------	-----------

Reported To Environmental:

Name	Company	Date/Time
------	---------	-----------

Reported To General Manager:

Name	Company	Date/Time
------	---------	-----------

Regulatory Tracking: (To be completed by Environment Department)

24 Hour Spill Hotline (867) 667-7244:

Reported By:		Reported To:		Date/Time:	
--------------	--	--------------	--	------------	--

Selkirk First Nation Lands Director (867)-537-3331

Reported By:		Reported To:		Date/Time:	
--------------	--	--------------	--	------------	--

EMR - Client services and Inspections (867) 456-3882: (or site inspectors)

Reported By:		Reported To:		Date/Time:	
--------------	--	--------------	--	------------	--

Environment Canada in the event of a discharge to a waterway (867)-667-3400

Reported By:		Reported To:		Date/Time:	
--------------	--	--------------	--	------------	--

Detailed written report and MSDS to YWB, EMR, EC and SFN (Required within 10 days of spill):

Submitted By:		Date of Submission:	
---------------	--	---------------------	--

Photos:

--	--

Appendix B: Reporting Threshold, Special Precautions, PPE Requirements, and Cleanup and Disposal Methods

Minto Mine - Inventory of Dangerous Goods

Reporting Threshold, Special Precautions, PPE Requirements, and Cleanup and Disposal Methods

Common Name (Synonyms)	Chemical Name	Manufacture / Supplier	Phase	TDG Class	WHMIS Class	NFPA Rating	Reporting Threshold	Use	Special Precautions	PPE Required	Special Cleanup and Disposal Info
Acetone	2-Propanone	Anachemia	Liquid	3	B-2, D-2B	1, 3, 0	200 L	Solvent	Extremely Flammable	Goggles, gloves. SCBA if in confined space	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use dry chemical, CO2, Alcohol-resistant foam. Do not allow into waterway or drains. Contain spread of spill and soak up with absorb all, absorbant pads. Clear up using non-sparking tools. Place liquid and absorbents into tightly sealed container, label clearly and dispose of as hazardous waste offsite.
Acetylene	C ₂ H ₂	AIRGAS INC	Pressurized gas dissolved	2.1	A, B-1, F	1, 4, 3	any if container larger than 100 L	Welding/cutting gas	Extremely flammable, pressurized gas dissolved in an extremely flammable liquid (Acetone)	Goggles, gloves. Respirator or SCBA if in confined space	Eliminate all sources of ignition, if possible without risk, shut off bottles. If bottle is ruptured after the gas has been expelled, the bottle will release the Acetone. At that point treat as an Acetone spill.
AERO 6493 Promoter	Alkyl hydroxamate	Cytec Canada	Liquid above 15C	9		2, 1, 2	5 L	Metal flotation in mill			Soak up with absorbent (do NOT use sawdust. Use PLASTIC tools). In case of fire, use dry chemical, CO2, Alcohol-resistant Foam or water spray. Place recovered spill liquid in labelled drums for disposal as Special waste. Incinerate used absorbent pads.
AERO MX-5149	Modified Thionocarbamate 15-40% Xanthate ester 40-70%	Cytec Canada	Liquid	3	B3, D-1B, D-2B	3,2,0	200 L	Metal flotation in mill	Flammable	Closed system, safety glasses, gloves	Remove sources of ignition. Cover spills with some inert absorbent material; sweep up and place in a waste disposal container. Flush spill area with water.
Aerodri 100 Dewatering Agent		Cytec Canada	Liquid	3	B3, B-2, D-2A	2, 3, 0	200 L		Avoid contact with strong oxidizers or acids.	Safety Glasses, Gloves	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use dry chemical, CO2, Alcohol-resistant Foam or water spray. Incinerate waste. Soak up with absorbent materials and dispose of offsite in clearly labeled containers
Alconox		Anachemia	solid	not regulated	D-2B	1, 0, 0	50 kg			Safety Glasses, Gloves	Clean up uncontaminated material for reuse. Incinerate waste.
ALIQUAT 336	Methytriocetyl-ammonium Chloride	Sigma-Aldrich Canada	Liquid	6	D-2B	2, 1, 1	5 kg		Toxic if swallowed. Very corrosive. Will burn skin and eyes. Avoid contact with strong oxidizers. Hygroscopic; avoid contact with moist air.	Safety Glasses, Gloves	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use dry chemical, CO2, Alcohol-resistant Foam or water spray. Incinerate waste.
AlphaSolve II	>50% Sodium Hydroxide <50% Silicate	Alpha Resources	Solid						Avoid contact with strong oxidizers.	Safety Glasses, Impervious Gloves.	Highly caustic. Will produce heat and steam on contact with water. May boil and spatter. May generate hydrogen gas on contact with metals. Sweep or vaccum and, if not re-useable, send offsite as hazardous waste, in tightly closed, well labeled containers.
Aluminex 5	Aluminum Chloride Hydroxide Sulphate 15%	NALCO	Liquid	8	E		5 L	Coagulant		Safety Glasses, Gloves	Soak up with absorbent materials. These can be incinerated. Any remaining spill liquid should be stored in closed container, labelled and disposed of off-site as Special Waste.
Aluminum Standard - AA		Anachemia	Liquid	8	E	4, 0, 0	5 L		Dilute Nitric Acid <5%	Safety Glasses, Gloves	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
AM28 Flotation Reagent	Mixture of Potassium Hydroxide Alkyl hydroxamate	Axis House (Pty) Ltd.	Liquid	not regulated	D-2B	2,1,0		Flotation Reagent	corrosive solid.	Safety Glasses, Gloves	Soak up with absorbent (do NOT use sawdust. Use PLASTIC tools). In case of fire, use dry chemical, CO2, Alcohol-resistant Foam or water spray. Place recovered spill liquid in labelled drums for disposal as Special waste. Incinerate used absorbent pads.
Amco Clear Turbidity Standard		GFS Chemicals	Liquid	not regulated	not regulated					Safety Glasses, Gloves	Contain spill. Incinerate waste or place in landfill
Ammonia, Refrigerant	Ammonia, Anhydrous	GT&S, INC	Liquefied Gas	2.3, 8	does not appear classified??	3, 0, 0	any amount		Liquefied gas, will produce extreme cold when released. Death has occurred at 5000ppm exposure for 5 minutes. Evacuate release area upwind and avoid low areas.	Goggles, gloves. SCBA.	Toxic gas and will react with a large number of substances, many in a violent manner, Gas will dissipate quickly in air. Small spills can be dissolved in water at ratio of 1:10 Not very flammable. Do not attempt to neutralise.

Minto Mine - Inventory of Dangerous Goods

Reporting Threshold, Special Precautions, PPE Requirements, and Cleanup and Disposal Methods

Common Name (Synonyms)	Chemical Name	Manufacture / Supplier	Phase	TDG Class	WHMIS Class	NFPA Rating	Reporting Threshold	Use	Special Precautions	PPE Required	Special Cleanup and Disposal Info
Ammonium Nitrate prill	Ammonium Nitrate	Agrium	solid	5.1	C, D-2B	1.0.3	50 kg		Oxidizing material, does not burn but may contribute to combustion of materials that can burn	Safety Glasses, Gloves	In case of fire, cool containing vessels with water jet in order to prevent pressure build-up/explosion. Use flooding quantities of water. Evacuate surrounding area. If fumes or gases present, fire fighters should wear self-contained breathing apparatus. In event of spill, prevent from entering waterways. Will dissolve and disperse in water.
Ammonium Nitrate Emulsion	Ammonium Nitrate Emulsion	on-site	Liquid	5.1		2,0,3	50 kg	Explosive	Oxidizing material, does not burn but may contribute to combustion of materials that can burn	Safety Glasses, Gloves, chemical suits, SCBA may be required	In case of fire, cool containing vessels with water jet in order to prevent pressure build-up/explosion. Use flooding quantities of water. Evacuate surrounding area. If fumes or gases present, fire fighters should wear self-contained breathing apparatus. In event of spill, prevent from entering waterways. Use non-combustible material to soak up.
Arsenic Standard - AA		Anachemia	Liquid	8	D-2A, E	4, 0, 0	5 L		Dilute Nitric Acid <5%	Safety Glasses, Gloves	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
Ascorbic Acid	L-Ascorbic Acid (Vitamin C)	Anachemia	solid	not regulated	not regulated	1, 1, 1	5 kg		also known as Vitamin C	Safety Glasses, Gloves	Contain spill. Incinerate waste or place in landfill
Brake & Electrical Parts Kleen	CO ₂ aerosol of Heptane and Isopropyl alcohol	Kleen-Flo Tumbler Industries	aerosol	Limited quantity	Consumer commodity; A, B5, D2-B	1, 3, 0			Highly flammable	Safety Glasses, Gloves	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use dry chemical, CO ₂ , Alcohol-resistant Foam or water spray. Incinerate waste.
Buffer Solution pH 10		Anachemia	Liquid	not regulated	D-2A	1, 0, 0		Analytical Lab use	Dilute Sodium Hydroxide	Safety Glasses, Gloves	Contain spill. Absorb with sand, vermiculite or sorbal. Incinerate waste.
Buffer Solution pH 4		Anachemia	Liquid	not regulated	not regulated	1, 0, 0		Analytical Lab use		Safety Glasses, Gloves	Contain spill. Absorb with sand, vermiculite or sorbal. Incinerate waste.
Buffer Solution pH 7		Anachemia	Liquid	not regulated	not regulated	1, 0, 0		Analytical Lab use		Safety Glasses, Gloves	Contain spill. Absorb with sand, vermiculite or sorbal. Incinerate waste.
Cadmium Standard - AA		Anachemia	Liquid	8	D-2A, E	4, 0, 0	5 L		Dilute Nitric Acid <5%	Safety Glasses, Gloves	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use flooding quantities of water. Contributes to combustion of other materials. Neutralize with soda ash or lime. Contain spill, keep from entering ground water. Neutralized spill can be pumped to the pit or tailings system.
Calcium Chloride		J.T. Baker	solid	not regulated	D-2B	1, 0, 2, 3	any amount		Road Salt, will corrode metals	Safety Glasses, Gloves	Sweep up spilled material and it may be deposited in dilute form to the pit or tailings system. In case of fire use appropriate measures for surrounding fire.
Carbon Dioxide in Argon		Mittler Supply Inc.	Pressurized gas	2.2	A, D-2B	1, 0, 0	any if container larger than 100 L		Non-Flammable but will replace the O ₂ in confined space	Goggles, gloves, SCBA if in confined space	close valve if possible without risk, or allow the vent. In case of fire use any media suitable for surrounding fire. Use water spray to cool fire exposed containers.
Caustic Soda (solid)	Sodium Hydroxide	Fisher Scientific	solid	8	E	3, 0, 1	5 kg		very corrosive solid	Safety Glasses, Gloves	Sweep up spilled material for reuse. In case of fire use appropriate measures for the surrounding fire. Minimise direct water spray on material. This material melts and 318°C and when molten reacts violently with water. Neutralize the residue with a dilute solution of acetic acid. Neutralized solution can be disposed of in the pit or tailings system.
Caustic Soda (solution)		DOW	Liquid	8	E	3, 0, 1	5 L		very corrosive liquid	Safety Glasses, Gloves	Contain spill and pump to plastic barrel for re-use. In case of fire use appropriate measures for the surrounding fire. Neutralize the residue with a dilute solution of acetic acid. Neutralized solution can be disposed of in the pit or tailings system.
Caustic Potash	Potassium Hydroxide	Brenntag Canada	Solid	8	D-1B, E	3,0,1	5 kg		water reactive, contact with metals may evolve flammable hydrogen gas.	Safety Glasses, Gloves, fume hood	Sweep up or vacuum spillage, collect in suitable container for disposal. Avoid dust formation.
Chevron 2-Cycle Oil		Chevron Lubricants Canada	Liquid	not regulated	B-3	1, 2, 0	100 L		flammable oil for 2-stroke fuel	Safety Glasses, Gloves	contain spill and use absorbent and incinerate waste
Chevron ATF+3 Automatic Transmission Fluid		Chevron Lubricants Canada	Liquid	not regulated	not regulated	1, 1, 0	100 L			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger material pumped into plastic drums and used in a waste oil heating system.
Chevron Automatic Transmission Fluid MD-3		Chevron Lubricants Canada	Liquid	not regulated	not regulated	1, 1, 0	100 L			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger material pumped into plastic drums and used in a waste oil heating system.
Chevron Clarity Synthetic Machine Oil		Chevron Lubricants Canada	Liquid	not regulated	not regulated	1, 1, 0	100 L			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger material pumped into plastic drums and used in a waste oil heating system.

Minto Mine - Inventory of Dangerous Goods

Reporting Threshold, Special Precautions, PPE Requirements, and Cleanup and Disposal Methods

Common Name (Synonyms)	Chemical Name	Manufacture / Supplier	Phase	TDG Class	WHMIS Class	NFPA Rating	Reporting Threshold	Use	Special Precautions	PPE Required	Special Cleanup and Disposal Info
Chevron Compressor Oil 260		Chevron Lubricants Canada	Liquid	not regulated	not regulated	1, 1, 0	100 L			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger material pumped into plastic drums and used in a waste oil heating system.
Chevron Coupling Grease	Grease	Chevron Lubricants Canada	Semi-Solid	not regulated	not regulated	1, 1, 0	100 L or 100 kg			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger absorbent material in plastic drums and shipped off site for disposal.
Chevron Delo 300 Motor Oil		Chevron Lubricants Canada	Liquid	not regulated	not regulated	1, 1, 0	100 L			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger material pumped into plastic drums and used in a waste oil heating system.
Chevron Delo Grease EP	Grease	Chevron Lubricants Canada	Semi-Solid	not regulated	not regulated	1, 1, 0	100 L or 100 kg			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger absorbent material in plastic drums and shipped off site for disposal.
Chevron Diesel Engine Oil Delo 6170 CFO		Chevron Lubricants Canada	Liquid	not regulated	not regulated	1, 1, 0	100 L			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger material pumped into plastic drums and used in a waste oil heating system.
Chevron Drive Train Fluid HD		Chevron Lubricants Canada	Liquid	not regulated	not regulated	1, 1, 0	100 L			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger material pumped into plastic drums and used in a waste oil heating system.
Chevron ECO Hydraulic Oil AW		Chevron Lubricants Canada	Liquid	not regulated	not regulated	0, 1, 0	100 L			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger material pumped into plastic drums and used in a waste oil heating system.
Chevron Gas Engine Oil 930 and 940		Chevron Lubricants Canada	Liquid	not regulated	not regulated	0, 1, 0	100 L			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger material pumped into plastic drums and used in a waste oil heating system.
Chevron Mid-grade unleaded gasoline		Chevron Products	Liquid	3	B-2, D-2A, D-2B	2, 3, 0	200 L		Extremely Flammable, Vapours are harmful and they may be explosive. Non-sparking tools required. Vapours will collect in low areas and travel along the ground to an ignition source.	Goggles, gloves. Respirator or SCBA if in confined space	Eliminate all sources of ignition. Ventilate area if required. Dike the spill and pump to containers for recycling. Use absorbent. In case of fire, use dry chemical, CO2, Alcohol-resistant Foam or water spray. Allow waste absorbent to evaporate and then incinerate waste.
Chevron NWS Manual Transmission Fluid 6044GR		Chevron Lubricants Canada	Liquid	not regulated	not regulated	1, 1, 0	100 L			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger material pumped into plastic drums and used in a waste oil heating system.
Chevron RPM Universal Gear Lubricant		Chevron Lubricants Canada	Liquid	not regulated	not regulated	1, 1, 0	100 L			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger material pumped into plastic drums and used in a waste oil heating system.
Chevron Supreme Antifreeze/Coolant	Ethylene Glycol	Chevron Lubricants Canada	Liquid	not regulated under 5000 lb.	D-2A	1, 1, 0	25 L		may be fatal by ingestion	Safety Glasses, Gloves	contain spill. Can be pumped, filtered and reused. Small amounts can use absorbent and incinerate waste. Larger absorbent material in plastic drums and shipped off site for disposal.
Chevron Ulti-Plex® Grease EP		Chevron Lubricants Canada	Semi-Solid	not regulated	not regulated	1, 1, 0	100 L			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger absorbent material in plastic drums and shipped off site for disposal.
Chloramine T	Chloramine-T trihydrate	Fisher	solid	8	D-2A, E	3, 1, 1	5 kg		Container may explode under fire conditions. Will release toxic fumes with fire or when mixed with strong oxidizers or acids	Goggles, gloves. SCBA if in confined space	Eliminate all sources of ignition. Ventilate area if required. In case of fire, Material by itself is non-flammable, may decompose violently >100°C, use dry chemical, CO2 foam or water spray. DISPOSAL mix with flammable solvent and incinerate.
Chromium Standard - AA		Anachemia	Liquid	8	D-2A, E	3, 0, 0	5 L		Dilute Nitric Acid <5%	Safety Glasses, Gloves	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
Citric Acid	Citric Acid, Monohydrate	Anachemia	solid	not regulated	E	2, 1, 0	5 L		Will cause severe eye damage. Avoid oxidizers, acids, bases and bleach.	Safety Glasses, Gloves	Eliminate all sources of ignition. Ventilate area if required. In case of fire, use flooding quantities of water. Will decompose at high temperatures and emit acrid smoke and fumes.
Copper Standard - AA		Anachemia	Liquid	8	E	4, 0, 0	5 L		Dilute Nitric Acid <5%	Safety Glasses, Gloves	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
Crystal 78	Sodium Silicate	Quadra Chemicals	Liquid	not regulated	D-2B		25 L		Caustic solution. Avoid mixing with strong acids. Contact with metals such as aluminum, tin, lead and zinc generates hydrogen gas.	Goggles, gloves. Respirator	solution can be pumped into plastic drum and possibly recycled in mill circuit, or shipped off site. In case of fire use appropriate measures for surrounding fire.
Cyquest DP-6	Sodium polyacrylate in water	Cytec Canada	Liquid	not regulated	not regulated	1,1,0		Mill reagent	Slippery	Goggles, Impervious gloves	Soak up with absorbent materials. These can be incinerated. Any remaining spill liquid should be stored in closed container, labelled and disposed of off-site as Special Waste.

Minto Mine - Inventory of Dangerous Goods

Reporting Threshold, Special Precautions, PPE Requirements, and Cleanup and Disposal Methods

Common Name (Synonyms)	Chemical Name	Manufacture / Supplier	Phase	TDG Class	WHMIS Class	NFPA Rating	Reporting Threshold	Use	Special Precautions	PPE Required	Special Cleanup and Disposal Info
Delo Diesel Fuel System Cleaner		Chevron Lubricants Canada	Liquid	3	B-3, D-2A, D-2B		200 L			Safety Glasses, Gloves	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use dry chemical, CO2, Alcohol-resistant Foam or water spray. Incinerate waste.
Diesel Fuel No. 2		Chevron Products Company	Liquid	3	B-3, D-2A, D-2B	0, 2, 0	200 L			Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger material pumped into plastic drums and used in a waste oil heating system.
DIISOBUTYL KETONE	2,6-Dimethyl-4-heptanone	J.T. Baker	Liquid	3	B-2, D-2A	2, 2, 0	200 L		Avoid contact with strong oxidizers or acids.	Safety Glasses, Gloves	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use dry chemical, CO2, Alcohol-resistant Foam or water spray. Incinerate waste.
Drierite, indicating		Anachemia	solid	not regulated	D-2A	1, 0, 1				Safety Glasses, Gloves	Eliminate all sources of ignition. In case of fire use measures dictated by surrounding fire. Will decompose at 1450°C liberating Cl ₂ and SO ₂ . This product can be dried and reused, recycled.
Envirobind KFZ		Power Chemicals Ltd.	Liquid	not regulated	not regulated	1, 0, 0		Dust Suppression	Avoid contact with oxidizing agents or strong acids.	Goggles, Gloves	Do not use absorbents. Contain spill using noncombustible materials such as vermiculite, earth or sand.
Envirobind KTF		Power Chemicals Ltd.	Liquid	not regulated	not regulated	1, 0, 0		Dust Suppression	Avoid contact with oxidizing agents or strong acids.	Goggles/Glasses, Gloves	Do not use absorbents. Contain spill using noncombustible materials such as vermiculite, earth or sand.
Envirobind PCW		Power Chemicals Ltd.	Liquid	not regulated	not regulated	1, 0, 0		Dust Suppression	Avoid contact with strong oxidizing materials.	Goggles/Glasses, Gloves	Dike or contain. Absorb irrecoverable material onto inert oil absorbent medium, package, and label for legal disposal. Wash hard surfaces with water. Contaminated absorbent material may be disposed of in an approved landfill
FLEET CHARGE 50/50 Antifreeze	Ethylene Glycol	OLD WORLD INDUSTRIES	Liquid	9	D-2A	1, 1, 0	25 L		may be fatal by ingestion	Safety Glasses, Gloves	contain spill. Can be pumped, filtered and reused. Small amounts can use absorbent and incinerate waste. Larger absorbent material in plastic drums and shipped off site for disposal.
Fleet Charge PG Antifreeze/Coolant	Propylene Glycol	OLD WORLD INDUSTRIES	Liquid	not regulated	not regulated	0, 1, 0	25 L			Safety Glasses, Gloves	contain spill. Can be pumped, filtered and reused. Small amounts can use absorbent and incinerate waste. Larger absorbent material in plastic drums and shipped off site for disposal.
Flomin C 3505 Collector	Potassium amyl xanthate (PAX)	Flomin Inc.	solid	4	not regulated	2, 2, 1	25 kg		Product is spontaneously combustible. Avoid contact with heat, moist air, and water.	Safety Glasses, Gloves	Sweep up spilled material and place in closed container for reuse. Solutions of product may be disposed of on the pit or tailings system. In case of fire use appropriate measures for surrounding fire.
Flomin F 500 Frother	4-METHYL-2-PENTANOL (Methyl isobutyl carbinol - MIBC)	Flomin Inc.	Liquid	3	B-2, D-2B	2, 2, 0	200 L		Acids, acid chlorides, alkalis, oxidizing agents. Will attack some forms of plastics, rubber and coatings	Goggles, gloves. Respirator or SCBA if in confined space	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use dry chemical, CO2, Alcohol-resistant Foam or water spray. Incinerate waste.
Floran Catalyst	Proprietary Inorganic Peroxide Blend	Floran Technologies	Liquid	5	C, D-2B	2, 0, 1, OX	50 L		Non-Flammable but will aid combustion of other materials	Safety Glasses, Gloves	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use flooding quantities of water. Contributes to combustion of other materials. Contain spill, keep from entering ground water. Absorbed pill can be disposed in the pit or tailings system.
Frost Killer (Tannergas)	Methyl alcohol	TANNER SYSTEMS, INC.	Liquid	3, 6.1	B-2, D-1B, D-2A, D-2B	1, 3, 0	200 L		Extremely Flammable, Vapours are harmful and solution is poisonous	Goggles, gloves. Respirator or SCBA if in confined space	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use dry chemical, CO2, Alcohol-resistant Foam or water spray. Incinerate waste.
FUEL INJECTOR CLEANER		Radiator Specialty Co	Liquid	3	B-3, D-2A, D-2B		200 L			Safety Glasses, Gloves	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use dry chemical, CO2, Alcohol-resistant Foam or water spray. Incinerate waste.
Gasoline, Unleaded		Petro-Canada	Liquid	3	B-2, D-2A, D-2B	2, 3, 0	200 L		Extremely Flammable, Vapours are harmful and they may be explosive. Non-sparking tools required. Vapours will collect in low areas and travel along the ground to an ignition source.	Goggles, gloves. Respirator or SCBA if in confined space	Eliminate all sources of ignition. Ventilate area if required. Dike the spill and pump to containers for recycling. Use absorbent. In case of fire, use dry chemical, CO2, Alcohol-resistant Foam or water spray. Allow waste absorbent to evaporate and then incinerate waste.
Glycerin	IPAC	Power Chemicals Ltd.	Liquid	Not regulated	Not regulated				Avoid contact with reducing agents and oxidizing agents.	Goggles, gloves.	Dike spilled product to prevent runoff
Havoline DEX-COOL Extended Life 50/50 Anti-Freeze/Coolant	Ethylene Glycol	Chevron Lubricants Canada	Liquid	not regulated	D-1b, D-2A	2, 0, 0	25 L		may be fatal by ingestion	Safety Glasses, Gloves	contain spill. Can be pumped, filtered and reused. Small amounts can use absorbent and incinerate waste. Larger absorbent material in plastic drums and shipped off site for disposal.

Minto Mine - Inventory of Dangerous Goods

Reporting Threshold, Special Precautions, PPE Requirements, and Cleanup and Disposal Methods

Common Name (Synonyms)	Chemical Name	Manufacture / Supplier	Phase	TDG Class	WHMIS Class	NFPA Rating	Reporting Threshold	Use	Special Precautions	PPE Required	Special Cleanup and Disposal Info
HAVOLINE DEX-COOL extended life anti-freeze/coolant-B	Ethylene Glycol	Chevron Lubricants Canada	Liquid	not regulated	D-1b, D-2A	2, 1, 0	25 L		may be fatal by ingestion	Safety Glasses, Gloves	contain spill. Can be pumped, filtered and reused. Small amounts can use absorbent and incinerate waste. Larger absorbent material in plastic drums and shipped off site for disposal.
Havoline Power Steering Fluid		Chevron Products	Liquid	not regulated	not regulated	0, 1, 0				Safety Glasses, Gloves	contain spill. Small amounts can use absorbent and incinerate waste. Larger material pumped into plastic drums and used in a waste oil heating system.
Hot 4-in-1 Heating Oil Treatment	Proprietary Blend	FPPF Chemical Company, Inc.	Liquid	3	B-3, D-1A, D-2A, D-2B	3, 2, 0	200 L		Fuel Additive, fumes will collect in low area's.	Safety Glasses, Gloves	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use dry chemical, CO2, Alcohol-resistant Foam or water spray. Incinerate waste.
Hydrated Lime	Ca(OH) ₂	Chemical Lime Company of Canada Inc.	Solid	not regulated	D-2A, E				Will cause severe caustic burns. Avoid strong acids, and aluminum	Safety Glasses, Gloves	sweep up uncontaminated material for reuse. Neutralize with dilute acid and may be disposed of in pit or tailings system.
Hydraulic Oil SAE 10W		EXXON MOBIL	Liquid	not regulated	not regulated	0, 1, 0	200 L			Safety Glasses, Gloves	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use dry chemical, CO2, Alcohol-resistant Foam or water spray. Incinerate waste.
Hydrex 3223		Veolia	Liquid	8	E	1, 0, 0	5kg or 5L	Coagulant in the WTP		Safety glasses with side shields or goggles, face shield, chemical resistant gloves. Suitable respiratory equipment in poorly ventilated areas.	Contain spill. Ventilate area if required. Use absorbent. Place contaminated materials in sealed container for disposal and dispose of via a licensed waste disposal contractor.
Hydrex 6186		Veolia	Solid	not regulated	not regulated	0, 1, 0		Flocculant in the WTP		Safety glasses with side shields or goggles.	Sweep or vacuum spilled material. Do not get water on spilled material. Flush area with water after product recovery. Place recovered material in sealed container and dispose of via a licensed waste disposal contractor.
Hydrochloric Acid		Anachemia	Liquid	8	D-1A, E	3, 0, 1	5 L		Concentrated acid, Extremely corrosive. Ventilate or stay upwind	Goggles, gloves. Respirator or SCBA if in confined space	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
Hydrofluoric acid, 47 - 51%		Fisher	Liquid	8, 6.1	D-1A, D-2A, E	4, 0, 1	5 L		Extremely corrosive and Toxic acid. Causes very severe acid burns with symptoms being delayed. Skin contact of <10% can be fatal from cardiopulmonary problems. IMMEDIATE medical attention is required for all exposures.	Goggles, gloves. Respirator or SCBA if in confined space (Actually SCBA should be used anywhere unless spill is in a fumehood)	Neutralize with soda ash. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to a plastic barrel and then disposed of in the pit or tailings system.
IPAC 6832		Quadra Chemicals	Liquid	not regulated	not regulated				water soluble	Safety Glasses, Gloves	No special clean up procedures,
Iron Standard - AA		Anachemia	Liquid	8	E	1, 0, 0	5 L		Dilute Nitric Acid <5%	Safety Glasses, Gloves	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
Isopropylxanthic acid sodium salt (SIPX)		Quadra Chemicals Ltd.	Solid	4.2	B-6, D-1B, D-2B		25 kg	Collector in Mill	Keep away from water - contact with water liberates extremely flammable gases. Keep away from heat, sparks and flame - fine dust clouds may form explosive mixtures with air. Use only with adequate ventilation.	Goggles, Gloves, Respirator (air-purifying or air-fed)	Move containers from spill area. Avoid allowing the spilled material to get wet or using water to clean up spillages or residues, unless the quantity remaining is very small. Vacuum or sweep up material and place in a designated, labeled waste container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.
Javex Liquid Bleach	NaOCl	Colgate Palmolive	Liquid	not regulated	E, D-2B, C				Self heating and may catch fire.	Safety Glasses, Gloves, SCBA	Ventilate area and allow qualified personnel to stop/control spill. Small spills: flush area with plenty of water and mop up. Large spills: dike the ingredient and transfer to appropriate containers. Consult Federal, Provincial and Municipal regulations for disposal. May be neutralized with sodium bisulphite or dilute hydrogen peroxide.
KAX 51	Proprietary Blend (mix of isoamyl alcohol, potassium amyl xanthate, and potassium hydroxide)	Prospec Chemicals	Solid	4.2	B-6, D-1B, E		25 kg	Collector in Mill		Safety Glasses, Face Shield, Gloves, SCBA	If in the liquid state: Stop spill at source. Contain any spilled material to prevent discharge into the environment. Eliminate all sources of ignition. Persons not wearing protective equipment should be excluded from the area. Absorb with inert dry material. Put into an approved metal salvage drum for disposal. If in the solid state: Eliminate all sources of ignition. Restrict access to area until completion of clean-up. Ensure clean-up is conducted by trained personnel only. Do not touch spilled material. Do not use water on spilled material as heat will be generated. Put spilled material into approved salvage drums for disposal. Flush cleaned area with water, making sure no water enters xanthate containers.

Minto Mine - Inventory of Dangerous Goods

Reporting Threshold, Special Precautions, PPE Requirements, and Cleanup and Disposal Methods

Common Name (Synonyms)	Chemical Name	Manufacture / Supplier	Phase	TDG Class	WHMIS Class	NFPA Rating	Reporting Threshold	Use	Special Precautions	PPE Required	Special Cleanup and Disposal Info
KOPR-KOTE	Graphite, Cu & MoS ₂ mixture	Jet-Lube of Canada	paste	not regulated	not regulated	1,1,1				Safety Glasses, Gloves	Wipe up spill with rags and incinerate waste.
Lead Standard - AA		Anachemia	Liquid	8	D-2A, E	4, 0, 0	5 L		Dilute Nitric Acid <5%	Safety Glasses, Gloves	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
Lime		Chemical Lime Company of Canada Inc.	powder	not regulated	E	3, 0, 1			Will cause severe caustic burns. Avoid strong acids, and aluminum	Safety Glasses, Gloves	sweep up uncontaminated material for reuse. Neutralize with dilute acid and may be disposed of in pit or tailings system.
Liquid Nitrogen	Nitrogen	Praxair Canada Inc.	Liquefied Gas	2.2 Non-flammable gas	A	3, 0, 2	any if container larger then 100 L		Use air supplied respirator when working in confined space, Loose-fitting cryogenic gloves, Metatarsal shoes for cylinder handling. Protective clothing where needed. Cuff less trousers should be worn outside of shoes	Extremely cold liquefied gas, Will cause severe frost bite Use SCBA when working in confined space,	Evacuate all personnel from danger area. Allow spilled liquid to evaporate. Use self contained breathing apparatus where needed. Shut off flow if you can do so without risk. Ventilate area or move cylinder to a well-ventilated area. Test for sufficient oxygen, especially in confined spaces, before allowing re-entry
LIQUID WRENCH SUPER LUBRICANT (AEROSOL)	Proprietary Blend	Radiator Specialty Co	aerosol	2.1	A, B5, D-1A, D2-B		any if container larger then 100 L		containers may rupture if exposed to high temperatures.	Safety Glasses, Gloves	Allow container to completely discharge while eliminating ignitions sources. Wipe up spill with rags and incinerate waste.
Loctite Belt Dressing	Proprietary Blend	Henkel Canada, Inc.	aerosol	2.2	A, D-2A, D-2B		any if container larger then 100 L		containers may rupture if exposed to high temperatures.	Safety Glasses, Gloves	Allow container to completely discharge Wipe up spill with rags and incinerate waste.
LPS 2 Spray Lubricant	Proprietary Blend	LPS Laboratories	aerosol	2.2	A, D-2A, D-2B		any if container larger then 100 L		containers may rupture if exposed to high temperatures.	Safety Glasses, Gloves	Allow container to completely discharge Wipe up spill with rags and incinerate waste.
Magnesium Nitrate Matrix Modifier		Spex CertiPrep	Liquid	8	D-2A, E	3, 0, 0	5 L		Dilute Nitric Acid <5%	Safety Glasses, Gloves	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
MAXGOLD™ 900 Promoter	Proprietary Blend	Cytec Canada	Liquid	3	B-3, D-2A	3, 2, 0	200 L		slightly yellow liquid that has a slight sulphur smell. In confined space use respirator with organic vapour cartridges	Goggles, gloves. Respirator or SCBA if in confined space	eliminate ignition sources, use absorbent on small spills, for large spill pump to plastic drum for shipment off site. In case of fire use dry chemical extinguisher, CO ₂ or foam. Water likely not effective.
MERCSORB Mercury Amalgamation Powder		NPS Corporation	solid	4		0, 1, 1	25 kg		Dry zinc dust will not ignite spontaneously, but once ignited, it may burn readily in air	Safety Glasses, Gloves	Sweep up spilled material and place in closed container for reuse. In case of fire use appropriate measures for surrounding fire.
Mercury Indicator Powder	Proprietary Blend	NPS Corporation	solid	not regulated		2, 1, 0			Odorless, yellowish-tan to gray powder. Dust may form a flammable or explosive mixture in air. When heated to decomposition, toxic fumes of sulfur oxides are produced	Safety Glasses, Gloves	Sweep up spilled material and place in closed container for reuse. In case of fire use appropriate measures for surrounding fire. This product in itself is considered to be non-hazardous.
Mercury Standard - AA		Anachemia	Liquid	8	D-2A, E	3, 0, 0	5 L		Dilute Nitric Acid <5%	Safety Glasses, Gloves	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
Mercury Vapor Suppressor	Proprietary Blend	NPS Corporation	solid	not regulated		2, 1, 0			Odorless, black, irregular, dry granular solid. Wet activated carbon removes oxygen from the air causing a severe hazard to workers in confined space.	Safety Glasses, Gloves	Sweep up spilled material and place in closed container for reuse. Contaminated waste can be incinerated. In case of fire use appropriate measures for surrounding fire. This product in itself is considered to be non-hazardous.
Methanol		Anachemia	Liquid	3, 6.1	B-2, D-1B, D-2A, D-2B	1, 3, 0	200 L		Extremely Flammable, Vapours are harmful and solution is poisonous	Goggles, gloves. Respirator or SCBA if in confined space	Eliminate all sources of ignition. Ventilate area if required. Use absorbent. In case of fire, use dry chemical, CO ₂ , Alcohol-resistant Foam or water spray. Incinerate waste.
MIBC	Methyl Isobutyl Carbinol	Flomin Inc.	Liquid	3		2, 2, 0	200 L	Frother in Mill	Product liquid and vapor are flammable. Keep away from heat and sources of ignition. Product vapors or mist may be irritating to eyes and respiratory system. Product liquid may cause eye and skin burns. Harmful if swallowed.	Goggles or Face Shield, Gloves, Respirator (NIOSH/MSA)	Dike spill and collect for disposal or reuse. Use adsorbents on residual material. Flush spill area with water. Keep flush material out of waterways. Dispose of cleanup material in an approved manner.
MIBK	4-Methyl-2-pentanone	Fisher Scientific	Liquid	3	B-2	2, 3, 0	200 L		clear liquid that has a slightly sweet smell. In confined space use respirator with organic vapour cartridges	Safety Glasses, Gloves	Clear liquid that is immiscible with water. Use absorbent for small spills and incinerate waste. Large spills, eliminate ignitions sources and pump to plastic drum for shipment off site.
Molybdenum Standard - AA		Anachemia	Liquid	not regulated	not regulated	0, 0, 0				Safety Glasses, Gloves	Contain spill. Incinerate waste or place in landfill
Mucosal universal detergent		Sigma-Aldrich Canada	Liquid	not regulated	D-2B	2, 0, 0				Safety Glasses, Gloves	

Minto Mine - Inventory of Dangerous Goods

Reporting Threshold, Special Precautions, PPE Requirements, and Cleanup and Disposal Methods

Common Name (Synonyms)	Chemical Name	Manufacture / Supplier	Phase	TDG Class	WHMIS Class	NFPA Rating	Reporting Threshold	Use	Special Precautions	PPE Required	Special Cleanup and Disposal Info
Nickel Standard - AA		Anachemia	Liquid	8	D-2A, E	1, 0, 0	5 L		Dilute Nitric Acid <5%	Safety Glasses, Gloves	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
Nitric Acid		Anachemia	Liquid	8	C, D-1A, E	4, 0, 0, OX	5 L		Concentrated acid, Extremely corrosive. Ventilate or stay upwind. Strong Oxidizer	Goggles, gloves. Respirator or SCBA if in confined space	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
Nitric Acid 40%		Quadra Chemicals	Liquid	8	C, D-1A, E	4, 0, 0, OX	5 L		Concentrated acid, Extremely corrosive. Ventilate or stay upwind. Strong Oxidizer	Goggles, gloves. Respirator or SCBA if in confined space	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
Oxygen		BOC Canada Limited (Linde)	Pressurized gas	2.2	A, C	0, 3, 0, OX	any if container larger than 100 L		Strong Oxidizer will Contribute to combustion of other materials.	Safety Glasses, Gloves	close valve if possible without risk, or allow the vent. In case of fire use any media suitable for surrounding fire. Use water spray to cool fire exposed containers.
Oxygen Refrigerant		Air Liquide Canada	Liquefied Gas	2.2	A, C	0, 3, 0, OX	any if container larger than 100 L		Strong Oxidizer will Contribute to combustion of other materials. Liquefied gas, will produce extreme cold when released.	Safety Glasses, Gloves	close valve if possible without risk, or allow the vent. In case of fire use any media suitable for surrounding fire. Use water spray to cool fire exposed containers.
Palladium Nitrate Matrix Modifier		Spex CertiPrep	Liquid	8	D-2A, E	3, 0, 0	5 L		Dilute Nitric Acid <5%	Safety Glasses, Gloves	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
Phosphoric acid		Sigma-Aldrich Canada	Liquid	8	D-1A, D-2B, E		5 L		Concentrated acid, Extremely corrosive. Ventilate or stay upwind.	Goggles, gloves. Respirator	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.
Pine Oil (Terpene SW Blend)		Quadra Chemicals Ltd.	Liquid	not regulated	B-3, D-2B			Frother in Mill	Combustible liquid and vapor. Causes respiratory tract, eye and skin irritation. Use only with adequate ventilation. Keep container tightly closed and sealed until ready for use. Wash thoroughly after handling. Avoid oxidizing materials.	Goggles, Gloves, Respirator (air-purifying or air-fed)	Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble or absorb with an inert dry material and place in an appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.
PAX	Potassium Amyl Xanthate	Quadra Chemicals Ltd.	Solid	4.2	B-6, D-2B		25 kg	Collector in Mill	Keep away from water - contact with water liberates extremely flammable gases. Keep away from heat, sparks and flame - fine dust clouds may form explosive mixtures with air. Use only with adequate ventilation.	Goggles, Gloves, Respirator (air-purifying or air-fed)	Move containers from spill area. Avoid allowing the spilled material to get wet or using water to clean up spillages or residues, unless the quantity remaining is very small. Vacuum or sweep up material and place in a designated, labeled waste container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.
Polyclear A2501		Quadra Chemicals Ltd.	Solid	not regulated	not regulated			Tailings thickener flocculant	Keep away from heat, sparks and flame- fine dust clouds may form explosive mixtures with air. Take precautionary measures against electrostatic discharges. Use only with adequate ventilation. Avoid oxidizing materials.	Safety Glasses, Gloves	Move containers from spill area. Vacuum or sweep up material and place in a designated, labeled waste container. Use spark-proof tools and explosion-proof equipment. In case of fire use appropriate measures for surrounding fire. Place in sealed container and dispose of via a licensed waste disposal contractor.
Polyclear 2528	Polyclear Floc	Quadra Chemicals Ltd.	solid	not regulated	not regulated				concentrated solution is extremely slippery, use caution	Safety Glasses, Gloves, respiratory equipment if risk assesment deems necessary	Sweep up spilled material and it may be deposited of in dilute form to the pit or tailings system. In case of fire use appropriate measures for surrounding fire.
Polyclear 31080C		Quadra Chemicals Ltd.	Liquid	9	D-2B			Dewatering Aid in Mill	Use only with adequate ventilation. Avoid contact with strong oxidizers or halogens	Goggles, Gloves, Respirator (air-purifying or air-fed)	Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble or absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
Polyfroth W31		Quadra Chemicals Ltd.	Liquid	not regulated	not regulated			Frother in Mill	Harmful or fatal if swallowed. Can enter lungs and cause damage. May cause target organ damage	Goggles, Gloves, Respirator (air-purifying or air-fed)	Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble or absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
Potassium hydroxide	KOH	Science lab	Solid	8	D-1B	3, 0, 1	5 kg		very corrosive solid	Safety Glasses, Gloves	Use appropriate tools to put the spilled solid in a convenient waste disposal container. If necessary; Neutralize the residue with a dilute solution of acetic acid.
Potassium Iodide		Anachemia	solid	not regulated	D-2A	1, 1, 1			light and water exposure will cause breakdown	Safety Glasses, Gloves	Eliminate all sources of ignition. In case of fire use measures dictated by surrounding fire. Will decompose at high temperatures and emit toxic I ₂ fumes. Use appropriate SCBA.
Potassium permanganate		CAIROX	Solid	5.1	C, E	1, 0, 0, OX	50 kg		corrosive solid. Oxidizing solid	Safety Glasses, Gloves	Sweep up solid spill for possible reuse. If necessary reduce material in aqueous solution with sodium thiosulfate (hypo). In case of fire use flooding quantities of water, material will contribute to combustion.
Propane		Superior Propane	Liquefied Gas	2.1	A, B-1		any if container larger than 100 L		Extremely flammable. Liquefied gas, will produce extreme cold when released.	Goggles, gloves. SCBA if in confined space	close valve if possible without risk, or allow the vent. In case of fire use any media suitable for surrounding fire. Use water spray to cool fire exposed containers.
Selenium Standard - AA		Anachemia	Liquid	8	E	1, 0, 0	5 L		Dilute Nitric Acid <5%	Safety Glasses, Gloves	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.

Minto Mine - Inventory of Dangerous Goods

Reporting Threshold, Special Precautions, PPE Requirements, and Cleanup and Disposal Methods

Common Name (Synonyms)	Chemical Name	Manufacture / Supplier	Phase	TDG Class	WHMIS Class	NFPA Rating	Reporting Threshold	Use	Special Precautions	PPE Required	Special Cleanup and Disposal Info
Sodium Borohydride		Anachemia	solid	4.3	B-6, B-4, D-1B, E	3, 1, 2	25 kg		Flammable solid. Reacts violently with water and acids to produce flammable H ₂ gas. Strong reducing agent.	Safety Glasses, Gloves	Eliminate ignition sources, sweep up dry material. In case of fire use only dry chemical extinguisher, DO NOT USE WATER OR CO ₂
Sodium Hydroxide Solutions (various strengths)	NaOH (The Anachemia MSDS is current, treat all solutions in the same manner regardless of strength.)	Various Suppliers	Liquid	8	E	3, 0, 1	5 L		Caustic solution. Avoid mixing with strong acids. Contact with metals such as aluminum, tin, lead and zinc generates hydrogen gas.	Safety Glasses, Gloves	Neutralize the residue with a dilute solution of acetic acid. Neutralized solution can be disposed of in the pit or tailings system.
Sodium Nitrite		Anachemia	solid	5.1, 6.1	C, D-1B, D-2A	3, 0, 2, OX	50 kg		Strong Oxidizer will contribute to combustion of other materials.	Safety Glasses, Gloves	Eliminate all sources of ignition. In case of fire, use flooding quantities of water. Will decompose at high temperatures and emit acrid smoke. Strong oxidizer, may form compound that are sensitive to shock, friction. Sweep up solid spill for disposal. Dispose of contaminated solution in the pit or tailings system.
sodium sulphide Flakes	Sodium sulphide Hydrated	Quadra Chemicals	solid	8	D-1B, E		5 kg		caustic, very corrosive solid	Goggles, gloves. And a respirator, avoid creating dust and avoid any acids. Contact with acids liberate toxic H ₂ S	Sweep up spilled material in place in plastic sealed container for shipment off site.
TMT 15%	trisodium salt	Quadra Chemicals	Liquid	not regulated (treated as Cl. 9 Miscellaneous)	D-2B		25 L		water soluble	Safety Glasses, Gloves	No special clean up procedures, treated as Class 9 Miscellaneous as product does not meet Class 6 Toxicity standards but is an environmental hazard.
Urea	Carbamide	Anachemia	solid	not regulated	not regulated	1, 0, 0			Avoid contact with strong oxidizers. In fire conditions it can produce oxides of nitrogen. Also ammonia, and HCN	Safety Glasses, Gloves	Sweep up spilled material and it may be deposited in dilute form to the pit or tailings system. In case of fire use appropriate measures for surrounding fire.
Vitec 7000		Avista Technologies	Liquid	not regulated	2A	1, 0, 0		Antiscalant in WTP	Avoid mixing with strong bases, strong oxidizers, very strong acids, water reactive materials	SCBA or SABA in confined space, Safety goggles/glasses, Chemical impervious gloves	Soak up or wet vacuum spilled liquid. Neutralize residue with sodium bicarbonate or other neutralizing agent for very dilute acids. Decontaminate the area thoroughly. Place all spill residues in suitable container and dispose of via a licensed waste disposal contractor.
VAR SOL 3139 SOLVENT	Petroleum Hydrocarbons	Imperial Oil Chemicals	Liquid	3	B-3, D-2B	1, 2, 0	200 L		Flammable solvent	Safety Glasses, Gloves	Clean up uncontaminated material for reuse. Incinerate waste.
VoltEsso 35		Imperial Oil Chemicals	Liquid	not regulated	not regulated	1, 1, 0			electrical insulating oil	Safety Glasses, Gloves	Clean up uncontaminated material for reuse. Incinerate waste.
Zinc Standard - AA		Anachemia	Liquid	8	E	1, 0, 0	5 L		Dilute Nitric Acid <5%	Safety Glasses, Gloves	Neutralize with soda ash or lime. Contain spill, do not allow un-neutralized acid to enter water systems. Neutralized spill can be pumped to the pit or tailings system.

Appendix C: ERT Response to HazMat Spills

ERT Response to Hazmat Spill

Spill Contact: Yukon Territory Spill Line 1-867-667-7244

Canutec: 1-613-996-6666 Cell: *666

1. Site Management and control

Initial responders will :

- Approach the scene from uphill and upwind.
- Establish command uphill and upwind of spill at an appropriate distance.
- Establish 2 isolation perimeters: one that separates the hot zone from the warm zone and another that separates the warm zone from the cold zone. Emergency Response Guide or Canutec shall be referenced for perimeter size.
- Evacuate affected area or 'protect in place', as req'd. Emergency Response Guide or Canutec shall be referenced for evacuation zone.
- Identify contaminated persons and ensure they remain isolated until they can be decontaminated.
- Establish a staging area.
- Designate an information officer.
- Possible unification of command.

2. Identification of the problem

I/C will identify the:

- Spilled product, as per witness testimony, placards, labels, bill of lading, type of container, etc. If product cannot be identified from command position, then a recon team will be tasked with identification.
- Size of container.
- Size and nature of release.
- Conditions and # of victims at accident site.
- Topography of area, and exposures threatened.

3. Hazard & Risk Evaluation

A risk evaluation will be conducted, taking into consideration:

- Product hazards
- Access & Egress

- Size of Spill
- Condition of container
- Proximity of exposures
- Personnel available to perform operations, and their level of training/experience
- Information from MSDS, ERG, Canutec, etc., minimum 3 sources

4. Personal Protective Equipment

PPE will be selected for Ops, RIT, and Decon teams, considering:

- Flammability/explosiveness of product
- Toxicity of product
- Route of entry of product
- Permeation rate of PPE
- Breakthrough time of PPE
- Availability of PPE
- Visibility and workability while wearing PPE

5. Information management and resource coordination

The information officer will begin to gather information about the product once it has been identified. The information officer can use the MSDS, ERG, Canutec, or many other resources to gather information, such as:

- Properties of the product
- Hazards of the product
- Expected travel of product released
- Populations/ environment in jeopardy
- PPE req'd by responders
- Decontamination requirements

Command will prioritize the information and ensure that the correct people receive the correct information.

6. Implementing Response Objectives

Command will develop an overall strategy, which may be offensive (entry of hot zone to gain quick control), defensive (contain from the cold zone to prevent spread), or passive (isolate only, and wait for incident to run its course), considering:

- Life safety
- Incident stabilization
- Environmental protection
- Property salvage

Command will delegate tactics to operations teams, such as:

- Reconnaissance for unknown product
- Evacuation for toxic gas leak, fire, or explosive hazard
- Fire control for flammable gas, flammable liquid, or oxidizer
- Search and rescue
- Leak control
- Neutralization of corrosives
- Deployment of boom, drain covers, etc.
- Building of dams, dykes, etc.

To follow: specific tactic options will be discussed in more detail, pertaining to hazardous materials that are commonly found in large quantities at the Minto Mine.

Entry teams will enter with a clear objective, but must assess for the next team's objective. For example, the 1st entry team may be tasked with rescuing the driver of a fuel truck that rolled down a bank and is spilling fuel. Although their objective is to rescue, while they are on scene they should observe where the leak is, consider what could be used to stop it, where the fuel is going, and what is needed to contain it. They should bring a camera, so that pictures can be brought back to command. This will give command crucial information and better prepare the next team for their task.

7. Decontamination

Considerations for decontamination should begin at the outset of the incident. A decontamination construct will exist in the warm zone prior to any team entering the hot zone. It will typically consist of a large berm fashioned out of a large chemical resistant tarp, wrapped over a charged 2 ½" hose-line. There will be a charged 1 ½" hose-line nearby for emergency decontamination. Within the berm, there will be a series of smaller berms, in which, personnel will stand while being decontaminated. Personnel conducting the decontamination will be wearing the appropriate PPE (typically 1 class below ops) and will use detergent and water to gently scrub and rinse ops personnel and rescues as they exit the hot zone. Tools and anything else exiting the hot zone will be decontaminated as well.

Once decontamination is complete, all product collected by the berms, will be handled as per the MSDS.

8. Termination

Once emergency operations are complete, the scene will be handed over to clean-up & recovery operations. Command will ensure that the hand-off includes all pertinent information about the spilled product:

- Properties
- Hazards
- Location
- Safe-handling
- Exposure signs and symptoms
- Req'd PPE
- Disposal procedures

Command will conduct an on-site debrief. As well, a more formal debrief will be conducted, with all parties involved, at a later time. The incident will be documented, including exposure records for all personnel that entered the warm and/or hot zones.

Nitric Acid 40%

Note: when it comes to corrosives such as Nitric Acid, the solution to pollution is NOT dilution. For a spill of 1 45 gal drum, it would take over 450,000 gal of pure water to make the solution habitable for fish. It would take over 45,000,000 gal of pure water to neutralize it.

Site management and control

- Set up perimeter with at least 50m radius.
- Command, staging, & decon shall be positioned uphill.
- Unify command with Safety Superintendent, Mine Manager, Environmental Dept., product Carrier (if spill occurs during delivery to mine).

Identification



- UN# 2031
- Liquid state
- Colourless to yellow
- Transported in 45 gallon drums
- # of 45 gal drums possibly damaged will help estimate size of spill.
- What is downhill from spill? Could acid reach a stream?

Hazard & risk evaluation

- Strong acid, very corrosive.
- Severely hazardous to eyes and skin
- Ingestion could cause death
- Inhalation hazard, although low vapour pressure 1.3kPa (wants to be a liquid).
- Could be devastating to stream life.
- Strong oxidizer, could have explosive reaction with organic or combustible materials

PPE

- If there is a fire situation, PPE will consist of full turn-out gear and SCBA.
Otherwise
- Know and heed permeability rate and breakthrough times of all PPE.
- Acid resistant, class B suit with hood.
- Full-face respirator with appropriate chemical cartridges.
- Chemical resistant gloves & boots
- Chemical resistant tape used to seal between boots/suit, gloves/suit, and mask/hood.

Information management and resource coordination

- See MSDS for product information.
- Know the product's route of travel.
- Was anyone exposed?
- Will non-human life be exposed?
- Standard decon set-up will be constructed.
- Have tools cribbed for entry teams.
- Ensure there is enough PPE at the site to complete the task.
- Ensure there is enough neutralizing agent at the site to complete the task. *See below for chart*
- Ensure there is drinking water for responders.
- Have hazmat trailer, ambulance & fire truck in staging area, as req'd
- Have Site Services staged for digging, damming, product extraction, as req'd.

Implementing Response Objectives

- Rescue injured/exposed personnel.
- Prevent from entering streams
- Prevent from contacting combustibles and organics.
- If possible, stop the leak.
- If possible, contain by covering drains/culverts, damming, diverting to a berm, etc.
- Use over-pack to contain leaking drums that still contain product.
- Neutralize spilled product with weak caustic – primary neutralizing agent is Ansul Spill X-A, alternatively hydrated lime or baking soda (if available). Be cautious of chemical reaction.
- Use Litmus paper to test for pH when neutralizing with lime or baking soda.
- Site Services Vac-truck is an option for cleaning up product before or after neutralized, as necessary.

Decontamination

Standard decon set-up will be utilized in warm zone:

- Large berm fashioned out of large chemical resistant tarp, wrapped over charged 2 ½" hose-line, 2 small berms, will be in series, within the large berm.
- Decon personnel shall don class C suits without need for respiratory or splash protection, other than safety glasses.
- Ensure all personnel that entered hot zone are properly decontaminated.
- Ensure that all tools that entered the hot zone are properly decontaminated.

Termination

- Once operation complete, vac-truck can be utilized to clean up solution contained with the decon berms.
- Safe and proper disposal of all spent PPE.

- Transition of command.
- Debrief

Quick Access Chart for Estimating Amount of Caustic Req'd to Neutralize 40% Nitric Acid

For **Spill X-A**, use 1:1 ratio by volume, or 10lbs Spill X-A per 1 gal Nitric Acid.

Amount of Nitric Acid Spilled (in Gal.)	Amount of Baking Soda Req'd (in Lbs.)
1	5.6
2	11
5	28
10	56
20	110
45	252
90	504
135	756
180	1,008



Amount of Nitric Acid Spilled (in Gal.)	Amount of Lime Req'd (in Lbs.)
1	2.4
2	4.8
5	12
10	24
20	48
45	108
90	216
135	324
180	432

Charts derived from formulas below

Specific Gravity Nitric Acid: 1.2455

Concentration: 40%

$$1 \text{ gal HNO}_3 \times 1.24 \times 8.34 \text{ lbs/gal} \times 0.40 = 4.14 \text{ lbs HNO}_3$$



$\text{HNO}_3 = 63 \text{ amu}$

$\text{NaHCO}_3 = 85 \text{ amu}$

$\text{Ca}(\text{NO}_3)_2 = 164 \text{ amu}$

$(4.14 \text{ lbs HNO}_3 / 63 \text{ amu-HNO}_3) \times 85 \text{ amu-NaHCO}_3 = 5.6 \text{ lbs NaHCO}_3$

Therefore 1 gallon of Nitric Acid req's 5.6 lbs of baking soda

$(4.14 \text{ lbs HNO}_3 / 2(63) \text{ amu-HNO}_3) \times 164 \text{ amu-Ca}(\text{OH})_2 = 2.4 \text{ lbs Ca}(\text{NO}_3)_2$

Neutralization Formulas and Quick Access Charts Formulas

The key to effective and efficient neutralization, is knowing how to use the following formulas.

1. The first formula indicates how much acid is spilled in weight.

Step #1- Determine the quantity of acid spilled, usually in gallons.

Step #2- Determine the specific gravity of the acid usually provided in MSDS.

Step #3- Determine the concentration of the acid spilled usually in %.

Step #4- The weight of water is 8.34 pounds per gallon.

After the above figures are known plug them into the following formula.

Quantity of spill X specific gravity X weight of water X concentration = weight of the spill

Example

One gallon of sulfuric X 1.84 X 8.34 X 98% = 15.04 pounds of sulfuric

2. The second formula will determine the quantity of the neutralizer needed. The type of neutralizer needs to be selected based on costs and availability. Plug numbers into the following formula.
- 3.

Weight of the acid spilled X number in the chart for the selected neutralizer.

Example


15.04 pounds of sulfuric X 1.06 for Soda Ash = 15.94 pounds of Soda Ash

Determination through Chemistry

To calculate the amount of neutralization agent needed the balanced chemical reaction must be written and the equivalent weights of acid and base determined.

Example: 1,000 gallons of 38% hydrochloric acid will be neutralized with lime.

Step #1 – Write the complete balanced neutralization reaction:



This equation shows that 2 moles of HCl are required in the reaction with one mole of calcium oxide (lime).

Step #2 – Calculate the molecular weight of each compound:

HCl – H = 1, Cl = 35.5, Total = 36.5 amu

CaO – Ca = 40, O = 16, Total = 56

Step #3 – Calculate the weight of the HCl spill:

1,000 gallons X 1.20 X 8.34 X 0.38 = 3,803.04 pounds of HCl

Step #4 – Calculate the amount of neutralizer needed:

From Step #1 it was found that 2 moles of HCl are needed to react with 1 mole of CaO. From Step #2 it was found that 1 mole of HCl weighs 36.5 amu's so 2 moles weigh 73.0 amu's. The formula is; **weight of acid/formula weight of acid X formula weight of base = pounds of the neutralizer needed.**

3,803.04/73 X 56 = 2,917.4 pounds of lime

Finer Points

The final amount is an approximation and in actual practice more neutralizing agent should be obtained. The neutralization process needs to be checked at several spots to assure pH levels are acceptable and uniform.

Neutralization Precautions

Remember, the neutralization process is exothermic and it may involve splashing of product. Safety is paramount and proper protective equipment is very important. Also, the neutralizer is hazardous in its own right and needs to be handled with care. Consider expense and availability in selecting neutralizer. Other weak bases that may be used and their molecular weights are; sodium bicarbonate (NaHCO_3)- 85, and magnesium hydroxide (Mg(OH)_2)-58.

Neutralization Chart Information

Acids

Hydrochloric Acid, HCl, MW = 36.5, density/specific gravity is 1.19, weight of a gallon is 3.77 pounds at 38% concentration. Synonyms are chlorohydric acid and muriatic acid.

Nitric Acid, HNO_3 , MW = 63, density/specific gravity is 1.41, weight of a gallon is 8.23 pounds at 70% concentration. Synonyms are Aqua Fortis and Azotic Acid. (Aqua Regia is a mixture of nitric and hydrochloric acids).

Phosphoric Acid, H_3PO_4 , MW = 98, density/specific gravity is 1.69, weight of a gallon is 11.98 pounds at 85% concentration. Synonyms are orthophosphoric acid.

Sulfuric Acid, H_2SO_4 , MW = 98, density/specific gravity is 1.84, weight of a gallon is 15.04 pounds at 98% concentration. Synonyms are Oil of vitriol and “oleum” is fuming sulfuric acid.

Bases

Ammonium hydroxide, NH_4OH , MW = 35, clear solution, synonyms are ammonia solution and aqua ammonia. Strong ammonia odor evolves from liquid. High vapor pressure.

Calcium carbonate, $CaCO_3$, MW = 100, white powder, synonyms are crushed limestone and dolomite. Low heat of reaction that gives off carbon dioxide gas.

Calcium hydroxide, $Ca(OH)_2$, MW = 74, white powder, synonyms are slaked lime, hydrated lime, and calcium hydrate.

Calcium oxide, CaO , MW = 56, white powder, synonyms are quicklime, lime, and unslaked lime. Most economical, lowest cost, neutralizer. **Best choice!** Maximum pH is 12.45 at 25C.

Magnesium carbonate, $MgCO_3$, MW = 84, synonyms are magnesia alba and carbonate magnesium.

Magnesium hydroxide, $Mg(OH)_2$, MW = 58, white powder, synonyms are milk of magnesia and magnesia hydrate. Good neutralization agent. Maximum pH is 10.6 at 25C.

Potassium hydroxide, KOH , MW = 56, white flakes, synonyms are caustic potash. High heat of reaction with toxic fumes. Maximum pH is 14 at 25C.

Sodium bicarbonate, $NaHCO_3$, MW = 85, white powder, synonyms are baking soda and sodium acid carbonate. Low heat of reaction with carbon dioxide gas evolution.

Sodium Carbonate, Na_2CO_3 , MW = 106, white powder, synonyms are soda ash. **Second most economical neutralization agent next to lime.** Maximum pH is approximately 11 at 25C.

Sodium hydroxide, $NaOH$, MW = 40, white powder, synonyms are caustic soda, soda lye, caustic, and lye. High heat of reaction with toxic fumes. Maximum pH is 14 at 25C.

Quick Access Charts

Sulfuric Acid neutralization using Baking Soda (Sodium Bicarbonate)

Amount of Sulfuric Acid spilled	Amount of Baking Soda needed in pounds
1 gallon	25.6
2 gallons	51.2
3 gallons	76.8
4 gallons	102.4
5 gallons	128.0
10 gallons	256.0
50 gallons	1280.0
55 gallons	1408.0
100 gallons	2560.0

Hydrochloric Acid neutralization using Baking Soda

Amount of Hydrochloric Acid spilled	Amount of Baking Soda needed in pounds
1 gallon	5.5
2 gallons	11.0
3 gallons	16.5
4 gallons	22.0
5 gallons	27.5
10 gallons	55.0

50 gallons	275.0
55 gallons	302.5
100 gallons	550.0

Nitric Acid neutralization using Baking Soda

Amount of Nitric Acid spilled	Amount of Baking Soda needed in pounds
1 gallon	7.4
2 gallons	14.8
3 gallons	22.2
4 gallons	29.6
5 gallons	37.0
10 gallons	74.0
50 gallons	370.0
55 gallons	407.0
100 gallons	740.0

Sodium Sulfide

Site management and control

- Set up perimeter with at least 50m radius if water introduced, or 25m if solid.
- Command, staging, & decon shall be position upwind and uphill.
- Unify command with Safety Superintendent, Mine Manager, Environmental Dept., product carrier (if spill occurs during delivery to mine).

Identification



- UN# 1849
- Solid state
- Yellow
- Smell sulfurous or like rotten eggs with introduction of moisture.
- Transported in 1000 Kg 'Super-Sacks'.
- # of super-sacks possibly damaged, will help estimate size of spill.
- Is water being introduced to the spill? If so, what is downhill from the spill? Could run-off reach a stream?
- Are corrosives being introduced to spill? If so, what is downwind?

Hazard & risk evaluation

- Strong caustic.

- Severely corrosive to digestive tract, respiratory system, eyes, and skin.
- Dust is powerful systemic poison. Inhalation could cause headache, dizziness, unconsciousness, pulmonary edema, asphyxiation, death.
- Contact with acid releases toxic and flammable Hydrogen Sulfide.
- Routes of entry include absorption, inhalation, and ingestion.
- Keep spilled product dry
- If water introduced, avoid run-off, contact with soil, waterways.

PPE

- If there is a fire situation, PPE will consist of full turn-out gear and SCBA.
Otherwise
- Know and heed permeability rate and breakthrough times of all PPE.
- SCBA if significant H₂S release, otherwise, full-face respirator & OV cartridges with pre-filter.
- Corrosive resistant, class B suit with hood.
- Chemical resistant gloves & boots
- Chemical resistant tape used to seal between boots/suit, gloves/suit, and mask/suit.

Information management and resource coordination

- See MSDS for product information.
- Was anyone exposed?
- Will non-human life be exposed?
- Standard decon set-up will be constructed.
- Have tools cribbed for entry team.
- Ensure there is enough PPE at the site to complete the task.
- Ensure there is drinking water for responders.
- Have hazmat trailer, ambulance & fire truck in staging area, as req'd
- Have Site Services staged for digging, damming, product extraction, as req'd.

Implementing Response Objectives

- Rescue injured/exposed personnel.
- Keep product dry.
- Monitor atmosphere for H₂S and SO₂.
- If water introduced, contain run-off by covering drains/culverts, damming, diverting to a berm, etc. Solution collected can be mixed with oxidizing agent, such as hydrogen peroxide or sodium hypochlorite to prevent evolution of H₂S.
- If product has entered a stream, consider using over-flow dams to contain product, for extraction.
- Vacuum or sweep up dry product
- Disposal as per Environmental Dept. recommendations

Decontamination

Standard decon set-up will be utilized in warm zone:

- Large berm fashioned out of large chemical resistant tarp, wrapped over charged 2 ½" hose-line, 2 small berms, will be in series, within the large berm.
- Decon personnel shall don class C suits without need for respiratory or splash protection, other than safety glasses.
- Ensure all personnel that entered hot zone are properly decontaminated.
- Ensure that all tools that entered the hot zone are properly decontaminated.

Termination

- Once operation complete, solution in decon berms to be disposed of, as per Environmental recommendations.
- Safe and proper disposal of all spent PPE.
- Transition of command.
- Debrief

LPG (Propane)

Note: Minto gas detectors are calibrated to methane, and must be corrected to propane prior to use, during propane leak mitigation.

Site management and control

- Set up initial perimeter of at least 100m. For large tank where there is fire, set up perimeter of at least 1600m.
- Command, staging, & decon shall be positioned uphill and upwind.
- Eliminate sources of ignition.
- Unify command with Safety Superintendent, Mine Manager, Environmental Dept., product carrier (if spill occurs during delivery to mine).

Identification



- UN# 1075
- Colourless liquid and vapour while stored under pressure.
- Colourless and odourless gas in natural state at any concentration.
- Commercial propane has an odorant added which is commonly ethyl.
- Transported by tanker truck.
- Stored in 12,000L tank at ramp to camp and twin 18,000L tanks at Km 0 of the access road.

- What is downhill from spill?
- Is there threat to life?
- Is there threat to a stream?

Hazard & risk evaluation

- Extremely flammable gas.
- Vapour could be ignited by any source of ignition.
- Vapour is heavier than air and may travel considerable distance to an ignition source, and flash back.
- Stored under pressure, as a liquid.
- Product extraction methods could create static if not bonded/grounded, and serve as an ignition source.
- Massive explosion hazard where flame impingement on tank.

PPE

- Full turn-out gear with SCBA.

Information management and resource coordination

- See MSDS for product information.
- Consider contacting Canutec.
- Know the product's route of travel.
- Ensure tools are cribbed for entry teams.
-
- Have fire truck at scene and ambulance in staging area, as req'd

Implementing Response Objectives Leak in an enclosed space

- Evacuate structure.
- Close supply valve remotely if possible.
- Eliminate any source of ignition.
- Use positive pressure to ventilate space, ensure that it is exhausting to safe location.

If no remote isolation valve:

- Entry team (2 ERT members) & RIT team (2 ERT members) will don full turn-out gear & SCBA.
- Any electronic equipment being carried, such as radio or gas detector, must be intrinsically safe.
- Entry team will enter with charged 1 ½" hose-line and gas detector equipped with LEL sensor, while RIT stages in the cold zone .

- Once entry team is at 'reach of stream' distance from the leak, the nozzleman (Entry member 1) will set-up, with nozzle fixed on Entry member 2. Entry member 2 will continue toward valve, with gas detector.

If LEL sensor rises above 20%, entry team will retreat until ventilation can be made adequate.

- Once Entry member 2 reaches the valve, he will close the valve, then back away until he reaches entry member 1.
- Entry team will exit the structure, until it has been adequately ventilated.
- Once adequately ventilated, ERT members, wearing appropriate PPE, will sweep the structure with gas detector(s), to ensure there are no pockets of gas, before deeming the structure 'safe to enter'.

LPG line on fire, with no impingement

Note: a propane leak that is burning is safer than one that is not burning, as long as there is no impingement on a tank or structure. Therefore, in this scenario, gas will be allowed to burn until the valve can be shut off.

- Evacuate immediate area.
- If possible, close isolation valve from remote location.

If no remote isolation valve:

- Eliminate any further source of ignition.
- 2 or more ERT members in full turn-out gear & SCBA will be on 1 ½" hose-line.
- Nozzle will be turned to full fog, which will create a water-curtain between the fire and the fire fighters.
- The fire team will approach the isolation valve, keeping the water-curtain between themselves and the fire at all times, being careful not to put the fire out with the stream
- When the valve is reached by the team, the 2nd member on the line will let go of the hose and approach the valve, while the nozzleman maintains the water-curtain between the fire and the valve/fire team.
- The 2nd member will close the valve then back away from the fire until he regains his position on the hose.
- The team will maintain the water-curtain while they back away from the damaged gas-line.
- Once the team is at a safe distance, a 45 degree pattern can be fixed on the broken gas-line to cool it, and disperse any residual gases.

LPG leak, not enclosed, not on fire

Note: LPG has a very high vapour pressure (1013 kPa) so it wants to be a gas, a high vapour density (1.52) so it's heavier than air, and a low flash point (-103.4 C). This combination means that it can form an explosive gas cloud that will stay close to the ground, may linger in incident area, or migrate downwind and/or downhill, possibly settling in low lying areas.

- Evacuate immediate area as well as areas downwind/downhill as per ERG recommendations.
- If possible, close isolation valve from remote location.
- From 'reach of stream', set up ground monitor and fix a 45 degree fog pattern on area of concern. This will push gas cloud away from area and disperse it. Be sure to push it to a safe location.

If no remote isolation valve:

- Entry team (2 ERT members) & RIT team (2 ERT members) will don full turn-out gear & SCBA.
- Any electronic equipment being carried, such as radio or gas detector, must be intrinsically safe.
- Entry team will enter with charged 1 ½" hose-line and gas detector equipped with LEL sensor, while RIT stages in the cold zone.
- While ground monitor continues to 'make it rain' in the hot zone, nozzleman (entry member 1) will fix nozzle on entry member 2, as entry member 2 approaches the isolation valve, with gas detector.

If LEL sensor rises above 20%, entry team will retreat until water stream can be made more effective

- Once Entry member 2 reaches the valve, he will close the valve, then back away until he reaches entry member 1.
- Entry team will retreat to the cold zone until gases are adequately dispersed
- Once the gas is adequately dispersed, ERT members, wearing appropriate PPE, will sweep the area with gas detector(s), including low-lying areas where gas may have migrated to, before deeming the area 'safe to enter'.

Fire where there is flame impingement on LPG tank

- Evacuate all non-ERT members for at least 1,800 m where there is flame impingement on either the 12,000 L tank or the tandem 18,000 L tanks.
- Command will know and understand the signs of imminent BLEVE.
- If Command witnesses signs of imminent BLEVE from an upright tank, there shall be no attempt made to cool tanks, rather, all focus shall be on a rapid evacuation of all personnel, at least 1,800m.
- If tank has been knocked over, there may be little or no warning signs of BLEVE, therefore no attempt shall be made to cool, rather, all focus shall be on a rapid evacuation of all personnel, at least 1,800m.
- If a BLEVE is not imminent, an attempt will be made to connect a ground monitor to the stand-pipe at the Tailings bldg.
- A narrow fog stream will be fixed on the tank at the area of flame impingement.
- The monitor will be left unmanned and the remaining ERT will evacuate at least 1,800m.

Where a tanker truck carrying propane has over-turned on the access road, causing damage to the tank trailer and subsequent rapid release of propane, the strategy for the hazmat portion of the incident response, will be passive and conducted from an upwind/uphill location, at a safe distance, as per the ERG. Transfer of residual product for the scenario, will be conducted by outside resource.

Decontamination

- 1 ½" charged hose-line, as emergency decon

Termination

- Debrief

BW GasAlert Micro 5 is intrinsically safe, as per: http://directories.csa-international.org/xml_transform.asp?xml=certxml%5C080259_0_000-4828-82.xml&xsl=xsl/certrec.xsl

- GasAlert Micro 5 Portable Gas Detector, Model M5-xwt1t2-r-p-d-a-b-cc & M5PID-xwt1t2-r-p-d-a-b-cc; utilizing electrochemical, catalytic bead and photo-ionization sensors; Intrinsically Safe when powered by one of the following AA Size Batteries /

Battery Pack

- Duracell MN1500; T-Code T4; Ambient -20 to +40°C; T-Code 139.8°C (T3C); Ambient -20 to +50°C
- Energizer E91; T-Code 153°C(T3C); Ambient -20 to +40°C; T-Code 163°C (T3B); Ambient -20 to +50°C
- NiMH Rechargeable Battery Pack "M5-BAT01"; T-code T4; Ambient -20 to +50°C
- Lithium Polymer Rechargeable Battery pack "M5-BAT07B"; T-Code T4; Ambient -20 to +50°C

Diesel, Kerosene, CFE 150

Note: LEL sensor will not detect presence of long-chain hydrocarbon vapour. Photo-ionization detector (PID) should be used, if available.

Site management and control

- Set up perimeter with at least 50m radius.
- Command, staging, & decon shall be positioned uphill and upwind.
- Eliminate sources of ignition.
- Unify command with Safety Superintendent, Mine Manager, Environmental Dept, Dyno Nobel (if spilled product is CFE 150), product carrier (if spill occurs during delivery to mine).

Identification



- UN# 1202.
- Liquid state.
- Colour varies.
- Petroleum odour.
- Transported by B-train, tidy-tanks.
- Stored in tanks at fuel farm.
- What is downhill from spill??
- Is there threat to life?
- Is there threat to a stream?

Hazard & risk evaluation

- Combustible liquid.
- Vapour could be ignited by any source of ignition.
- Extraction methods could create static if not bonded/grounded, and serve as an ignition source.
- Ambient temperature relevant.

- Irritant to eyes and skin
- Ingestion and inhalation hazard
- Toxic to aquatic life.

PPE

- If there is a fire situation, PPE will consist of full turn-out gear with SCBA.
Otherwise
- For offensive strategies, such as rescue or plugging, full turn-out gear with SCBA
- For defensive strategies, such as diverting, damming, booming, diking, class B suit.
- Respirator with OV cartridges.
- Oil resistant gloves & boots

Information management and resource coordination

- See MSDS for product information.
- Know the product's route of travel.
- Standard decon set-up will be constructed.
- Ensure tools are cribbed for entry teams.
- Ensure there is enough PPE at the site to complete the task.
- Ensure there is drinking water for responders.
- Have hazmat trailer, ambulance & fire truck in staging area, as req'd.
- Have Site Services staged for digging, damming, product extraction, as req'd.

Implementing Response Objectives

- Rescue injured personnel.
- Consider using fog stream to protect rescuers.
- Fire-fighting: Use dry chemical, CO2, Class B foam, or water with fog pattern.
- If using fog, considering increased run-off hazard
- Prevent from entering streams.
- If possible, stop the leak: close valves, use plugs, plug n' dyke, gaskets, straps, jacks, cribbing, etc.
- Containment berm at source, 'Surrey Condom'.
- If possible, contain by covering drains/culverts, diking, diverting to a berm, absorbing, etc.
- If product has entered a stream, use booms, hydrocarbon-only absorbent socks and pads, under-flow dams, diversion-booms, skimmers to contain and extract, as per instructions found later in this document.
- If transfer of product req'd, ensure entire system is bonded/grounded.
- Use non-sparking tools, such as pneumatics.
- Site Services Vac-truck is an option for cleaning up product.

Decontamination

Standard decon set-up will be utilized in warm zone:

- Large berm fashioned out of large chemical resistant tarp, wrapped over charged 2 ½" hose-line, 2 small berms, will be in series, within the large berm.
- Decon personnel shall don class C suits without need for respiratory or splash protection, other than safety glasses.
- Ensure all personnel that entered hot zone are properly decontaminated.
- Ensure that all tools that entered the hot zone are properly decontaminated.

Termination

- Once operation complete, vac-truck can be utilized to clean up solution contained with the decon berms.
- Safe and proper disposal of all spent PPE.
- Transition of command.
- Debrief

Gasoline

Note: Minto gas detectors are calibrated to methane and must be corrected to gasoline, or alternatively pentane, prior to use during gasoline spill mitigation

Site management and control

- Set up perimeter. Consider radius up to 800m depending on amount of product and level of explosion hazard.
- Command, staging, & decon shall be positioned uphill and upwind.
- Eliminate sources of ignition.
- Unify command with Safety Superintendent, Mine Manager, Environmental Dept., product carrier (if spill occurs during delivery to mine).

Identification



- UN# 1203.
- Liquid state.
- Colourless to slightly yellow.
- Recognizable odour.

- Transported by B-train, tidy-tanks.
- Stored in tank at fuel farm.
- What is downhill from spill??
- Is there threat to life?
- Is there threat to a stream?

Hazard & risk evaluation

- Flammable liquid. Extremely flammable in presence of ignition source, at nearly any temperature.
- Vapour could be ignited by any source of ignition.
- Vapour is heavier than air and may travel considerable distance to an ignition source, and flash back.
- Product extraction methods could create static if not bonded/grounded, and serve as an ignition source.
- Explosion hazard where flame impingement on tank.
- Irritant to eyes.
- Ingestion and inhalation hazard
- Toxic to aquatic life.

PPE

- If there is a fire situation, PPE will consist of full turn-out gear with SCBA.
- Otherwise*
- For offensive strategies, such as rescue or plugging, full turn-out gear with SCBA
 - For defensive strategies, such as diverting, damming, booming, diking, fire resistant class B suit.
 - Respirator with OV cartridges, only if LEL's are being monitored, otherwise, do not dampen sense of smell. Rather, move upwind of product vapour.

Information management and resource coordination

- See MSDS for product information.
- Know the product's route of travel.
- Standard decon set-up will be constructed.
- Ensure tools are cribbed for entry teams.
- Ensure there is enough PPE at the site to complete the task.
- Ensure there is drinking water for responders.
- Have hazmat trailer, ambulance & fire truck in staging area, as req'd
- Have Site Services staged for digging, damming, product extraction, as req'd.

Implementing Response Objectives

- Offensive tactics for rescue of injured personnel only.
- Consider blanketing affected area with class B foam, prior to rescuers entering hot zone.

- Use fog stream to suppress vapours and protect rescuers.
- Rescuers will carry intrinsically-safe radios and gas-detector.
- Prevent from entering streams
- If possible, stop the leak.
- If possible, contain by covering drains/culverts, diking, diverting to a berm, absorbing, etc.
- If product can or has entered a stream, use booms, hydrocarbon-only absorbent socks and pads, under-flow dams, diversion-booms, as per instructions found later in this document.
- Safe handling and disposal of all waste product.

Decontamination

Standard decon set-up will be utilized in warm zone:

- Large berm fashioned out of large chemical resistant tarp, wrapped over charged 2 ½" hose-line, 2 small berms, will be in series, within the large berm.
- Decon personnel shall don class C suits without need for respiratory or splash protection, other than safety glasses.
- Ensure all personnel that entered hot zone are properly decontaminated.
- Ensure that all tools that entered the hot zone are properly decontaminated.

Termination

- Once operation complete, safe disposal of decon berm contents
- Safe and proper disposal of all spent PPE
- Hand-over command of operation to Environmental Dept.
- Debrief

Ammonium Nitrate

Site management and control

- Set up perimeter with at least 25m radius.
- Command, staging, & decon shall be positioned upwind.

- Eliminate sources of ignition.
- Unify command with Safety Superintendent, Mine Manager, Environmental Dept, Dyno Nobel, product carrier (if spill occurs during delivery to mine).

Identification



- UN# 1942.
- Solid state. Prills or granules.
- White.
- Odorless.
- Is there threat to a stream?

Hazard & risk evaluation

- Oxidizer .
- Exposure to high heat may evolve toxic, flammable gases.
- Explosive when confined and exposed to high heat.
- Ingestion and inhalation hazard.
- Toxic to aquatic life.

PPE

- If there is a fire situation, PPE will consist of full turn-out gear with SCBA.
Otherwise
- Class C suit with long sleeves.
- Dust mask.
- Oil resistant gloves & boots

Information management and resource coordination

- See MSDS for product information.
- Work closely with Dyno.
- Standard decon set-up will be constructed.
- Have tools cribbed for entry teams.
- Ensure there is enough PPE at the site to complete the task.
- Ensure there is drinking water for responders.
- Have hazmat trailer, ambulance & fire truck in staging area, as req'd
- Have Site Services staged for digging, damming, product extraction, as req'd.

Implementing Response Objectives

- Rescue injured personnel.
- Fire-fighting: If flame impingement on tank, use unmanned ground monitor to supply flooding quantities of water via straight-stream, to cool tank. Then, evacuate area 800m in all directions. If signs of imminent explosion are present prior to setting up ground monitor, do not attempt to set it up, just evacuate for 800m in all directions.
- Prevent from entering streams.
- Once in stream, may be unrecoverable. Underflow dams should be constructed, and surface can be skimmed.
- If possible, stop anymore product from being spilled.
- Follow Dyno's recommendations for recovery and clean-up of product.

Decontamination

Standard decon set-up will be utilized in warm zone:

- Large berm fashioned out of large chemical resistant tarp, wrapped over charged 2 ½" hose-line, 2 small berms, will be in series, within the large berm.
- Decon personnel shall don class C suits without need for respiratory or splash protection, other than safety glasses.
- Ensure all personnel that entered hot zone are properly decontaminated.
- Ensure that all tools that entered the hot zone are properly decontaminated.

Termination

- Once operation complete, vac-truck can be utilized to clean up solution contained with the decon berms.
- Safe and proper disposal of all spent PPE.
- Transition of command.
- Debrief.

Emulsion

Site management and control

- Consider initial perimeter of 800m.

- Command, staging, & decon shall be positioned upwind.
- Eliminate sources of ignition.
- Unify command with Safety Superintendent, Mine Manager, Environmental Dept, Dyno Nobel, product carrier (if spill occurs during delivery to mine).

Identification



- UN# 0332.
- Viscous liquid.
- Pink, opaque.
- Slight fuel oil odour.
- Shipped in bulk by tanker truck.

Hazard & risk evaluation

- Emulsion explosives.
- Stable under normal conditions.
- May explode under fire conditions.
- Eye & skin irritant.
- Slight ingestion & inhalation hazard.
- Avoid contact with corrosives.
- Is there threat to a stream?

PPE

- Class C suit with long sleeves.
- Standard PPE

Information management and resource coordination

- See MSDS for product information.
- Work closely with Dyno.
- Standard decon set-up will be constructed.
- Have tools cribbed for entry teams.
- Ensure there is enough PPE at the site to complete the task.
- Ensure there is drinking water for responders.
- Have hazmat trailer, ambulance & fire truck in staging area, as req'd
- Have Site Services staged for digging, damming, product extraction, as req'd.

Implementing Response Objectives

- Rescue injured personnel.
- Fire-fighting: If fire reaches cargo, DO NOT ATTEMPT TO FIGHT FIRE. Cargo may explode. Evacuate in all directions for 1600m.
- Prevent from entering streams.
- If possible, stop anymore product from being spilled.
- Follow Dyno's recommendations for recovery and clean-up of product.

Decontamination

Standard decon set-up will be utilized in warm zone:

- Large berm fashioned out of large chemical resistant tarp, wrapped over charged 2 ½" hose-line, 2 small berms, will be in series, within the large berm.
- Decon personnel shall don class C suits without need for respiratory or splash protection, other than safety glasses.
- Ensure all personnel that entered hot zone are properly decontaminated.
- Ensure that all tools that entered the hot zone are properly decontaminated.

Termination

- Once operation complete, clean out berms under direction of Dyno.
- Safe and proper disposal of all spent PPE.
- Transition of command.
- Debrief.

Appendix D: Tug and Barge Emergency Contingency Plan



Minto Mine
Tug and Barge Emergency Contingency Plan
2017-01

Prepared by:
Minto Explorations Ltd.
Minto Mine
February 2017

First Issue: January 15, 2013

Revision History

Revision Number	Issue Date	Description and Revisions Made
2013-01	January 2013	First Issue
2017-01	February 2017	Review, revision of document and update of information: <ul style="list-style-type: none">• Revised format of document (added revision history and table of contents);• Section 2.0 and 3.1 - Removed references to JDS and mutual aid agreement (not in place);• Section 4.0 - updated level of NFPA training for ERT (472 HazMat awareness level);• Section 4.0 - updated reference to 2014 field and table top exercise.

Table of Contents

1	Introduction	3
2	General Procedures	3
3	Specific Procedures.....	4
3.1	Emergency Response to Sinking of CQTB	4
3.2	Emergency Response to Loss of Power or Control of CQTB	5
3.3	Emergency Response to Fire on the CQTB.....	6
3.4	Emergency Response to Man Overboard	7
3.5	Emergency Response to Freight or Vehicle Overboard of the CQTB.....	8
3.6	Emergency Response to Medical Emergency on board CQTB.....	9
3.7	Emergency Response to a Spill	10
4	Minto Mine Training	11

List of Appendices

Appendix A: Man Boat Specifications

Appendix B: Safe Job Procedure for Loading and Unloading the Barge.

1 Introduction

Minto Mine (Minto) a subsidiary of Capstone Mining Corporation is pleased to submit the following contingency plan (plan) as per requirements of the Selkirk First Nation Access and Land Use Permit “Minto Landing Ice Bridge and Marshalling Area and West Side Barge Landing and Marshalling Area” (the permit). It is Minto’s intention that this plan will fulfill the requirement as stated in Schedule 2, Section 9.0 Contingency Plan of the permit. It is not Minto’s objective for this plan to mitigate all possible accidents or malfunction in regards to the in stream operation of the Copper Queen tug and barge.

The plan as prepared is adaptive and will be amended as is practicable. This plan is intended to deliver the best possible means of mitigating an accident or malfunction of the loading/unloading or in-stream operation of the tug and barge with the resources available at Minto. Preventing such an occurrence requires a combination of: procedural and engineering controls, based on an awareness of at risk conditions. These documents exist in the form of the Spill Contingency Plan, Emergency Response Plan, and any procedures or plans on the tug or barge from Site Services. This document serves as a contingency plan in the event that an accident or malfunction occurs when loading, unloading, and in-stream operations of the Copper Queen tug and barge (CQTB).

2 General Procedures

Any Response to an Emergency condition will be based on a priority sequence of Life, Environment and Property. Therefore every event will be regarded with these priorities in mind. Initial on scene assessment of the accident or malfunction will be called out on channel one as a “Code 1”. The Emergency Response Team will be dispatched, communication established and the barge operator and deckhand will respond to control the scene.

Deckhands will mitigate all emergencies on the barge to the best of their ability given the resources available. General procedure in the event of an emergency would have the barge move to the west landing if possible or practical unless otherwise communicated to the barge captain. To mitigate an emergency in offloading or loading vehicles onto the barge the deckhand will utilize the anchor points on both landings. Slack will be left in the rope to ensure the barge captain is able to maneuver when docked at the landing. Tying off to the anchor points will mitigate complete catastrophe if the barge loses power during loading and offloading and will be discussed further under the specific procedures section of this plan.

To mitigate the risk of losing control of the barge downstream Minto will be installing an anchor on the barge. In the event of an emergency the deckhand would be able to deploy the anchor allowing the barge a safety contingency if control was lost.

3 Specific Procedures

Below is a list of the current on site procedures for dealing with various emergencies in regards to the CQTB at Minto Mine.

1. Emergency Response to Sinking
2. Emergency Response to Loss of Power or Control
3. Emergency Response to Fire Onboard
4. Emergency Response to Man Overboard
5. Emergency Response to Freight or Vehicle Overboard
6. Emergency Response to Medical Emergency on Board of the Barge
7. Emergency Response to Spill Response

3.1 Emergency Response to Sinking of CQTB

1. Activation of Emergency Protocol onboard CQTB calling code 1 to initiate ERT response.
2. Captain and deckhand will deploy Canadian Coast Guard approved life rafts.
3. As per Emergency Response Plan, Incident command (IC) will communicate with Deckhand by radio to determine any further details of events, number of injured or trapped people, risks to property and environment.
4. IC will respond to scene in one emergency vehicle ahead of remaining ERT. IC will upon arrival to scene provide initial scene assessment and gather any additional information available. Minimum ERT response will include full ERT member compliment, Environmental Lead, Hazardous materials response trailer, fire truck, ambulance and all associated equipment. ERT operations to be under the control of the ERT Captain. Additional response needs based on initial assessment and

evaluation by IC will be communicated to the Emergency Communications Center (ECC) as per Emergency Response Plan.

5. Incident Accountability will be established and adhered to throughout the operation.
6. IC will determine the need for rescue of people downstream. Option to deploy rescue ropes via launcher considered for KM 12.
7. Alternate access to river to be determined by nature of incident, KM 20 provides a second potential access. All other access would require trail cutting which is possible but would take more time.
8. IC, ERT Captain, and Environmental Lead (Unified Incident Command Support) will assess ongoing situation and need for additional or fewer resources.
9. Alternate man boat (see Appendix A for details on man boat) will be deployed from landing as needed to support rescue and/or to gain more information regarding location of sunken vessel and determine possible plan for retrieval/securing. Man boat operator will work under the direction of IC.
10. Once rescued, all patients will be treated as per OFA3/EMR protocols transported as per Yukon EMS dispatch confirmation aligned with Minto Emergency Response Plan.

3.2 Emergency Response to Loss of Power or Control of CQTB

The tug operates on two engines so total loss of power is not likely; however, is still possible and below is the emergency procedure that would be activated in the event that total loss or control of the CQTB was to occur.

11. Activation of Emergency Protocol onboard CQTB calling code 1 to initiate ERT response. Captain will also communicate freight details and passenger numbers on board.
12. Passengers and crew will follow instructions from Captain and remaining on board if deemed safe. The Captain and deckhand will follow MED protocol in decision making in regards to passenger safety.
13. Captain and deckhand will deploy Canadian Coast Guard approved life rafts if deemed unsafe to stay on board by Captain.

14. IC will respond to scene or as close to it, in one emergency vehicle ahead of remaining ERT. IC will upon arrival to scene provide initial scene assessment and gather any additional information available. Minimum ERT response will include full ERT member compliment, Environmental Lead, Hazardous materials response trailer, fire truck, ambulance and all associated equipment. ERT operations to be under the control of the ERT Captain. Additional response needs and downstream communication and reporting requirements based on initial assessment and evaluation by IC will be communicated to the Emergency Communications Center (ECC) as per Emergency Response Plan.
15. Incident Accountability will be established and adhered to throughout the operation.
16. Captain will navigate to the best of his ability to the safest downstream location possible. Under the direction of the Captain the deckhand may deploy the anchor to assist in stopping the barge and tug.
17. Captain will communicate to IC location and details of condition of vessel and people and assist in determining plans for action.
18. Once vessel is secured to shore or where landed in river, Man boat will be deployed to assist with additional securing and remove non-essential people to location where they can be transferred back to site or alternate safe location.
19. If available and a benefit, Minto would exercise the use of the mutual aid agreement with JDS.
20. Plan for retrieval will be based appropriate to the conditions and location of vessel. Plan to be developed cooperatively through Barge Captain, Minto ECC and Mutual Aid resources. Equipment and additional resources will be sourced through ECC as per Minto Emergency Response Plan.

3.3 Emergency Response to Fire on the CQTB

21. Activation of Emergency Protocol onboard CQTB calling code 1 to initiate ERT response.
22. If safe to do so, deckhand will attempt to suppress fire using equipment on board following Marine Emergency Duty (MED) protocol.

23. Captain and deckhand will deploy Canadian Coast Guard approved life rafts if vessel in immediate danger. If possible and practical the Captain will position barge so that wind is blowing port to starboard, to keep smoke/flames away from life raft.
24. If able to do so Barge will cross to West Bank of crossing and continue to use barge supplied fire suppression equipment. All passengers will disembark under direction of deckhand.
25. IC will respond to scene in one emergency vehicle ahead of remaining ERT. IC will upon arrival to scene provide initial scene assessment and gather any additional information available. Minimum ERT response will include full ERT member compliment, Environmental Lead, Hazardous materials response trailer, fire truck, ambulance and all associated equipment. ERT operations to be under the control of the ERT Captain. Additional response needs based on initial assessment and evaluation by IC will be communicated to the Emergency Communications Center (ECC) as per Emergency Response Plan.
26. Incident Accountability will be established and adhered to throughout the operation.
27. Once IC on scene and vessel safely secured, fire suppression will be conducted under the direction of the IC following NFPA 1081 standards. Industrial Fire Brigade.
28. Consideration of environmental sensitivity need to be considered by IC in cooperation with the Environmental Lead (unified incident command support).
29. Defensive spill containment methods to be utilized to control run off and releases from firefighting operations. This may include tactics such as extinguishing agent selection, damming and berming on barge, boom placement around vessel, removal of burning equipment once fire controlled, etc.

3.4 Emergency Response to Man Overboard

30. Activation of Emergency Protocol onboard CQTB calling code 1 to initiate ERT response.
31. Captain and deckhand will throw out provided Canadian Coast Guard approved life-rings to all personnel overboard. The response from the barge crew will conducted as per their MED training.
32. If able to successfully rescue person overboard, deckhand will treat person based on marine first aid protocols awaiting response by ERT and site Medic.

33. If unable to successfully achieve rescue, vessel will continue to West landing and man boat deployed for downstream rescue. Communication to IC on Radio Channel 1 must be available at all times. Man boat operation will be conducted under the direction of IC once in place.
34. Captain will communicate to IC of possible downstream rescue requirement.
35. IC will instruct ERT to stage at KM 12 with option to deploy rescue ropes via launcher considered for KM 12.
36. Incident Accountability will be established and adhered to throughout the operation.
37. IC to stage ambulance for patient pick up.
38. IC will communicate the need for mutual aid to ECC who will follow the Minto ERP by contacting local agencies for assistance on East side of river.
39. Once rescued, all patients will be treated as per OFA3/EMR protocols transported as per Yukon EMS dispatch confirmation aligned with Minto Emergency Response Plan.

3.5 Emergency Response to Freight or Vehicle Overboard of the CQTB

40. Activation of Emergency Protocol onboard CQTB calling code 1 to initiate ERT response. Captain will also communicate freight details and passenger numbers on board.
41. Passengers and crew will follow instructions from Captain (Captain will respond as per MED training) remaining on board if deemed safe.
42. Captain and deckhand will deploy Canadian Coast Guard approved life rafts if deemed unsafe to stay on board by Captain. If at landing passengers will be offloaded to safe location on shore.
43. IC will respond to scene or as close to it, in one emergency vehicle ahead of remaining ERT. IC will upon arrival to scene provide initial scene assessment and gather any additional information available. Minimum ERT response will include full ERT member compliment, Environmental Lead, Hazardous materials response trailer, fire truck, ambulance and all associated equipment. ERT operations to be under the control of the ERT Captain. Additional response needs and downstream communication and reporting requirements based on initial assessment and evaluation by IC will be communicated to the Emergency Communications Center (ECC) as per Emergency Response Plan.

44. Incident Accountability will be established and adhered to throughout the operation.
45. Captain will navigate to the best of his ability to the landing, preferably west landing.
46. Once vessel is secured to shore, man boat will be deployed by deckhand or ERT members to assist with additional securing of vessel and freight, and deployment of containment booms located at landing and on vessel. Man boat operation under the direction of IC once in place.
47. Plan for retrieval of freight will be determined appropriate to the condition and location of freight. Plan developed cooperatively through Barge Captain, Minto ECC and Mutual Aid resources.
48. Equipment and additional resources will be sourced through ECC as per Minto Emergency Response Plan including manpower, expertise, heavy equipment, etc.
49. Special considerations for support in the event of incident occurring on East side of river to include Yukon Emergency Measures Organization, local first responders and alternate equipment operations contractor.

3.6 Emergency Response to Medical Emergency on board CQTB

50. Activation of Emergency Protocol onboard CQTB calling code 1 to initiate ERT response.
51. For serious injury as defined in the ERP, Yukon EMS will be notified immediately.
52. Deckhand will treat patient per Marine Emergency First Aid protocols.
53. Captain will navigate barge to west bank of Yukon River and all vehicles will offload on west bank, giving clear passage for Ambulance.
54. ERT response will include medic, ambulance, fire truck and compliment of team members to assist with patient transfer and packaging.
55. Incident Accountability will be established and adhered to throughout the operation.
56. Yukon EMS dispatch will be updated of situation once history and assessment confirmed.
57. Upon arrival, Minto Medic will take control of scene and advise ERT Captain of resources needed on scene.

58. Upon history and assessment, patient will be treated, packaged and transferred as per OFA3/ERM protocols transported as per Yukon EMS dispatch confirmation aligned with Minto Emergency Response Plan.

3.7 Emergency Response to a Spill

59. Activation of Emergency Protocol onboard CQTB calling code 1 to initiate ERT response.
60. Deckhand will attempt to contain spill using on board spill kit, to prevent spill into Yukon River.
61. IC will respond to scene in one emergency vehicle ahead of remaining ERT. IC will upon arrival to scene provide initial scene assessment and gather any additional information available. Minimum ERT response will include full ERT member compliment, Environmental Lead, Hazardous materials response trailer, fire truck, ambulance and all associated equipment. ERT operations to be under the control of the ERT Captain. Additional response needs, downstream communication, communication with CANUTEC and reporting requirements based on initial assessment and evaluation by IC will be communicated to the ECC as per Emergency Response Plan and Spill Contingency Plan.
62. Incident Accountability will be established and adhered to throughout the operation.
63. If practical the barge captain will navigate the barge to west landing.
64. All passengers will disembark vessel.
65. All vehicles and machinery that is not in the spill zone will disembark.
66. Deckhand and ERT members under the direction of IC will use the man boat to deploy containment booms around the barge.
67. IC with advice from the Environment Lead will develop and implement the SCP for stopping the spill if possible.
68. If the spill cannot be stopped a plan to mitigate the quantity of contaminant spilt to environment will be developed and implemented.
69. If safe and practical to do so Environment Lead will deploy environment staff to sample downstream of spill to measure contamination concentration.

70. IC with advice from the Environment Lead will oversee cleanup of the spill.

71. Special considerations for support in the event of incident occurring on East side of river to access the barge with ERT by man boat.

4 Minto Mine Training

The barge crew were trained and certified in Marine Emergency Duties (MED) A1 and A2 in 2012. The MED course meets the standards of training, certification and watch-keeping, and is run by Transport Canada. The A1 MED course covers basic safety with a focus on hazards and emergencies awareness, firefighting, emergency response, lifesaving appliances and abandonment, survival and rescue. The A2 MED course covers small passenger-carrying vessel safety with the same focus as A1 with the addition of maintenance and inspection of emergency equipment and passenger control. As well the barge crew is trained in Marine First Aid.

The ERT team has been trained to National Fire Protection Association (NFPA) 472 Hazardous Materials awareness level for responders. In 2014, Minto conducted a table top and field exercise in regards to Yukon River response. The table top and field exercise was held in conjunction with ERT, barge crew, environment department, management, major contractors, the Yukon Spill Hotline, CANUTEC, Transnorth Helicopters, WCB, Parkland Fuel, and Quantum Murray. A post-incident debrief revealed both opportunities and successes at the field operations and management level.

Appendix A: Man Boat Specifications



- Brand/Model: Munson Packman Landing Craft
- Hull Length: 24 feet (7.3 meters)
- Beam: 8 feet 6 inches (2.6 meters)
- Hull Type: Packman mono hull
- Power: Twin Yamaha 150hp
- Propulsion: Outboard (25" shaft)
- Outfitting: 52" bow door

Appendix B: Safe Work Procedure for Loading and Unloading the Barge.



Capstone Minto Safe Work Practice

Barge Loading and Offloading



Purpose: To ensure the safe practice of loading and offloading the barge at the Yukon River. To educate workers on the hazards of loading and offloading the barge, and working on landings.

Scope: This Safe Work Practice pertains to the Captain and the crew of the Minto Mine property who are exposed to operating the barge for transport across river.

Definitions:

Certified Flotation Device – Personal Flotation Devices marked "Approved by Department of Transport Canada" or "Approved by Canadian Coast Guard, Department of Fisheries and Oceans"

Hypothermia - A potentially fatal condition that occurs when the body core temperature falls below 95°F (35°C). This can occur quickly when immersed in cold water.

Responsibilities

Employer / Supervisor Responsibilities

- Make sure appropriate training and assistance are provided to crew.
- Make sure appropriate rescue devices such as a life hook and flotation devices are available to workers

Safety Department Responsibilities

- Ensure this SWP is in alignment with the Yukon Health and Safety Act and Regulations

Worker Responsibilities

- Read, understand, and follow this safe work practice
- If unsure then stop work and ask for assistance
- Wear appropriate PPE defined to their work area.
- Provide training for proper use of PFD to passengers

Reference to Legislative and Site Requirements

- Yukon Occupational Health and Safety Regulations – Part 1 – section 1.34 – Each worker shall be provided with and be required to use an appropriate personal flotation device with the required buoyancy where a worker is employed in a situation where there is a risk of drowning

Safe Work Practice:

The captain and crew will give direction in regards to the following.

1. Landings.

- 1.1. Assess landing and vehicles to be loaded and unloaded. The use of wooden ramps may be needed. (For more information reference safe work practice for wooden ramps.)
- 1.2. Use gauge on apron ram to determine the need for landing to be rebuilt. This gauge is located on the ram closest to deckhand shed and has a max angle marked on the gauge. If the apron should go past the marked max angle stop and fix landing. (For more information reference safe work practice for landing maintenance and apron angle.)

2. Transportation.

- 2.1. Due to landing and vehicle loads ask driver to back on or drive on. This may be determined by many factors, such as:
 - Angle and length of landing
 - Apron angle and how it contacts the landing
 - Underwater debris
 - Drivers skill
 - Extra low trailers
 - Frozen or icy landings
 - Load weights
- 2.2. Deckhand must communicate with captain any concerns about previously mention conditions. It is ultimately the captains' decision on how the barge is loaded.

3. Priority Boarding

- 3.1. Emergency vehicles on medical runs are given the top priority. Compassionate reasons or special circumstances are considered when loading vehicle traffic. The bus will also be given high priority

along with con trucks. Loading priority will be determined by the Captain or the Supervisor.

- 3.2.** Priority may change from day to day and we ask that drivers cooperate and be patient. Ultimately the captain will make the decision based on information available at the time.

4. Communication.

- 4.1.** Drivers are given a handout of standard hand signals as endorsed by WCB and a signature logbook is maintained to who has received the handout and when.
- 4.2.** The deckhand is in charge of directing and communicating with all traffic. Radios, hand signals, face to face communication are all used. An air horn is used as warning to stop the drivers quickly.

5. Hazards.

- 5.1.** Working at or near water has its inherent risks. A JHA should be conducted for any new or unusual work being conducted on or near the water. Some hazards to be aware of are:

- Exposure to the environmental elements of the season
- Slips, trips and falls on uneven ground
- Slipping on slippery rocks and surfaces
- Eroding shore line sloughing or slipping on ice along shoreline
- Falling into cold water
- Ice flows and ice jams
- Swift current
- Drowning
- Hypothermia
- Wildlife
- Slippery deck

6. Emergency Equipment.


- 6.1.** Life ring with rope and pole must be available on the barge. An emergency response container complete with first aid kit, oxygen therapy unit, spare dry coveralls and several blankets is located on the tug. This container is used to reduce the effects of hypothermia until emergency response arrives.

- 6.2. As the river is 27kms from the mine site emergency response will take at least 40 minutes to arrive at the scene. Deckhands should have marine first aid training and clear knowledge of where all safety equipment is and its condition.
- 6.3. Honda pump & fire hose along with fire extinguishers are also in place. Deckhands should be well train in this area and will instruct people as needed on what to do in case of an emergency.

7. Training.

- 7.1. All workers must be trained and competent to operate or run any equipment that pertains to their job.
- 7.2. At least one worker must have a valid marine first aid ticket in the event of an emergency due to the location of this worksite and the anticipated delay on response time by ERT.

SWP Development and Approval

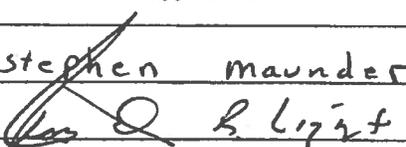	Print: <u>Developed/ Revised by:</u>	DD/MM/YYYY
Worker:		Date:
Worker:		Date:
JOHSC Representative:	Siana mills	Date:24/08/2012
Supervisor:	Stephen Maunder	Date:26/08/2012
Supervisor:	Captain Dave Johnstone	Date: :26/08/2012
Supervisor:	Jeff Billings	Date: :26/08/2012
Supervisor:		Date:
JOHSC Representative:		Date:
Senior Supervisor:		Date:
Senior Supervisor:		Date:
Departmental Manager:		Date:
	Print & Sign: <u>Reviewed By:</u>	
Safety Department:	MARK GOEBEL 	
Safety Department:		Date: Sept 19/12
	Print & Sign: <u>Approved By:</u> Determined by Safety Dept. Enter NA if not applicable.	Date:
Departmental Manager:	stephen maunder	Date: 19/09/12
General Manager:		Date: 9.20.2012

Clarification of this safe work practice can be directed to the Safety Department.


Name of SWP:

Location: X:\Health & Safety\Safety Public\Procedures and Safe Work Procedures


Last revision date: April 21 2012



Ideal Ramp Position for Loading

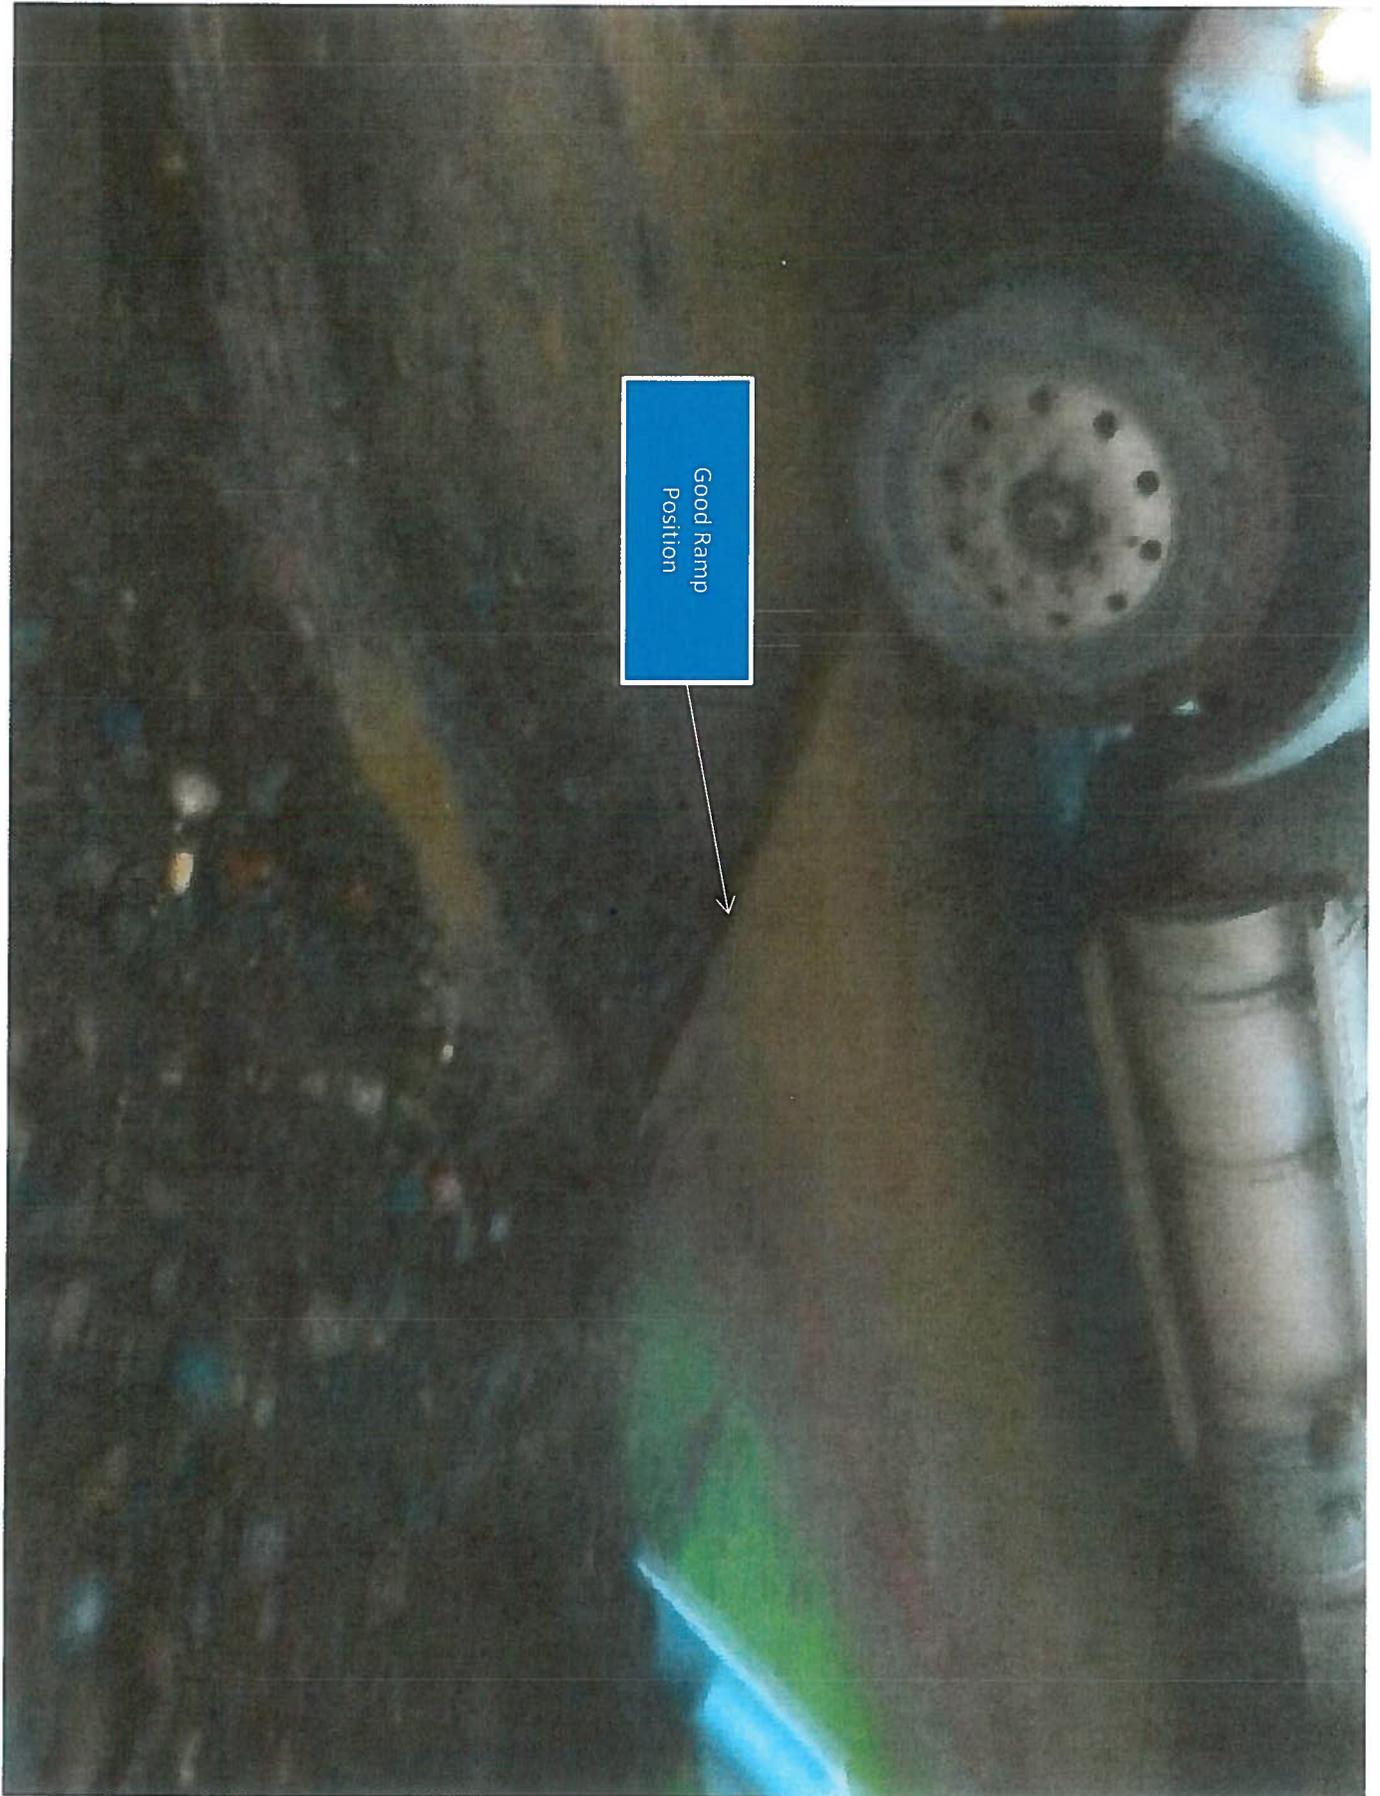


Good Ramp
Position

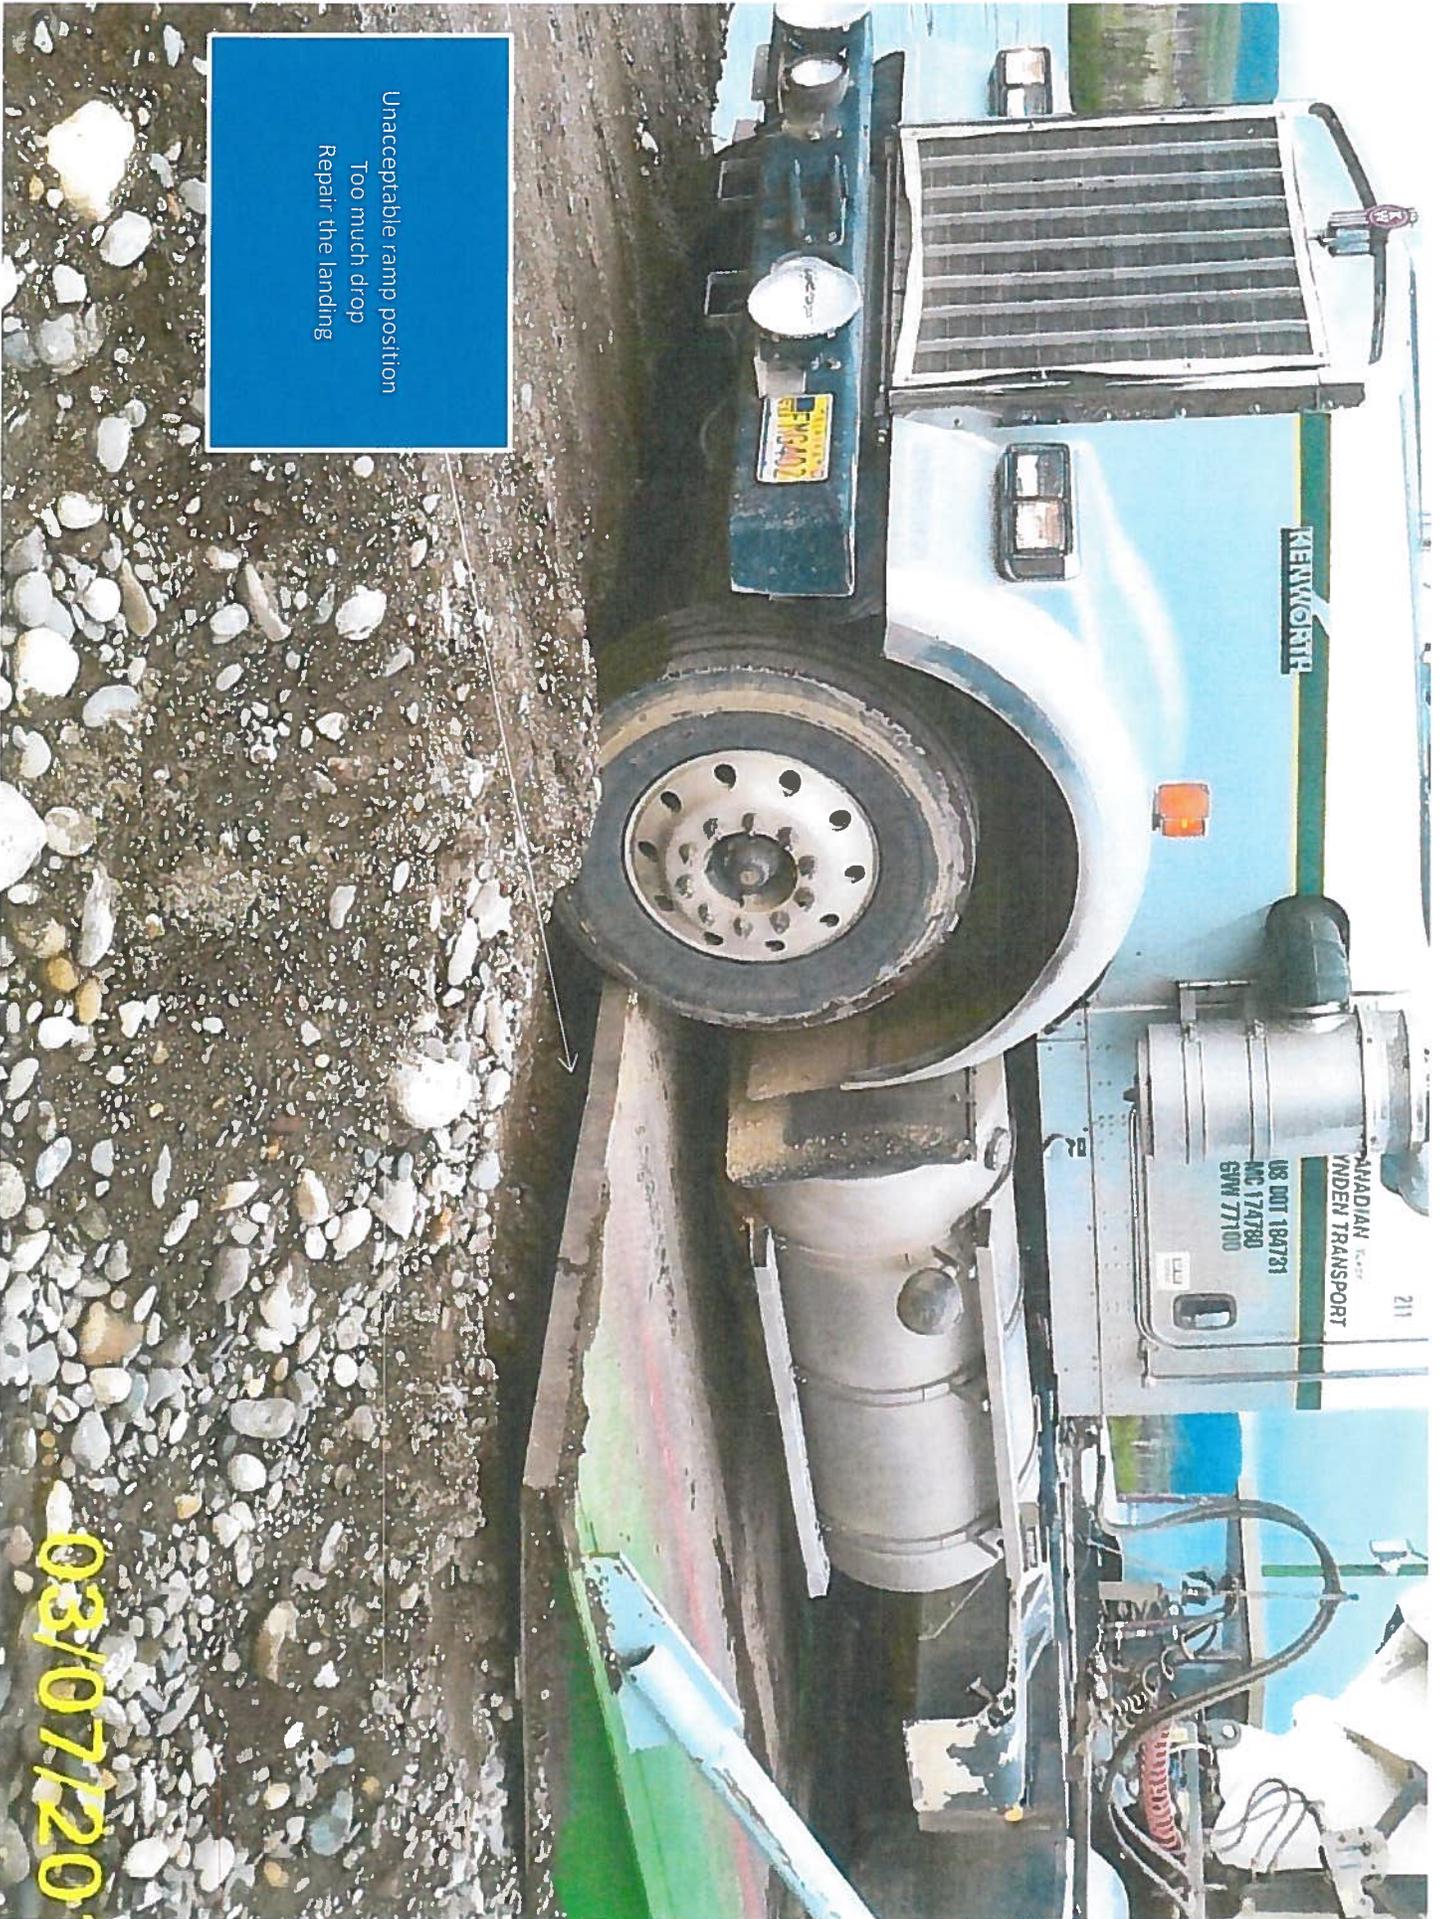

Unacceptable ramp position
Too much drop
Repair the landing

03107120

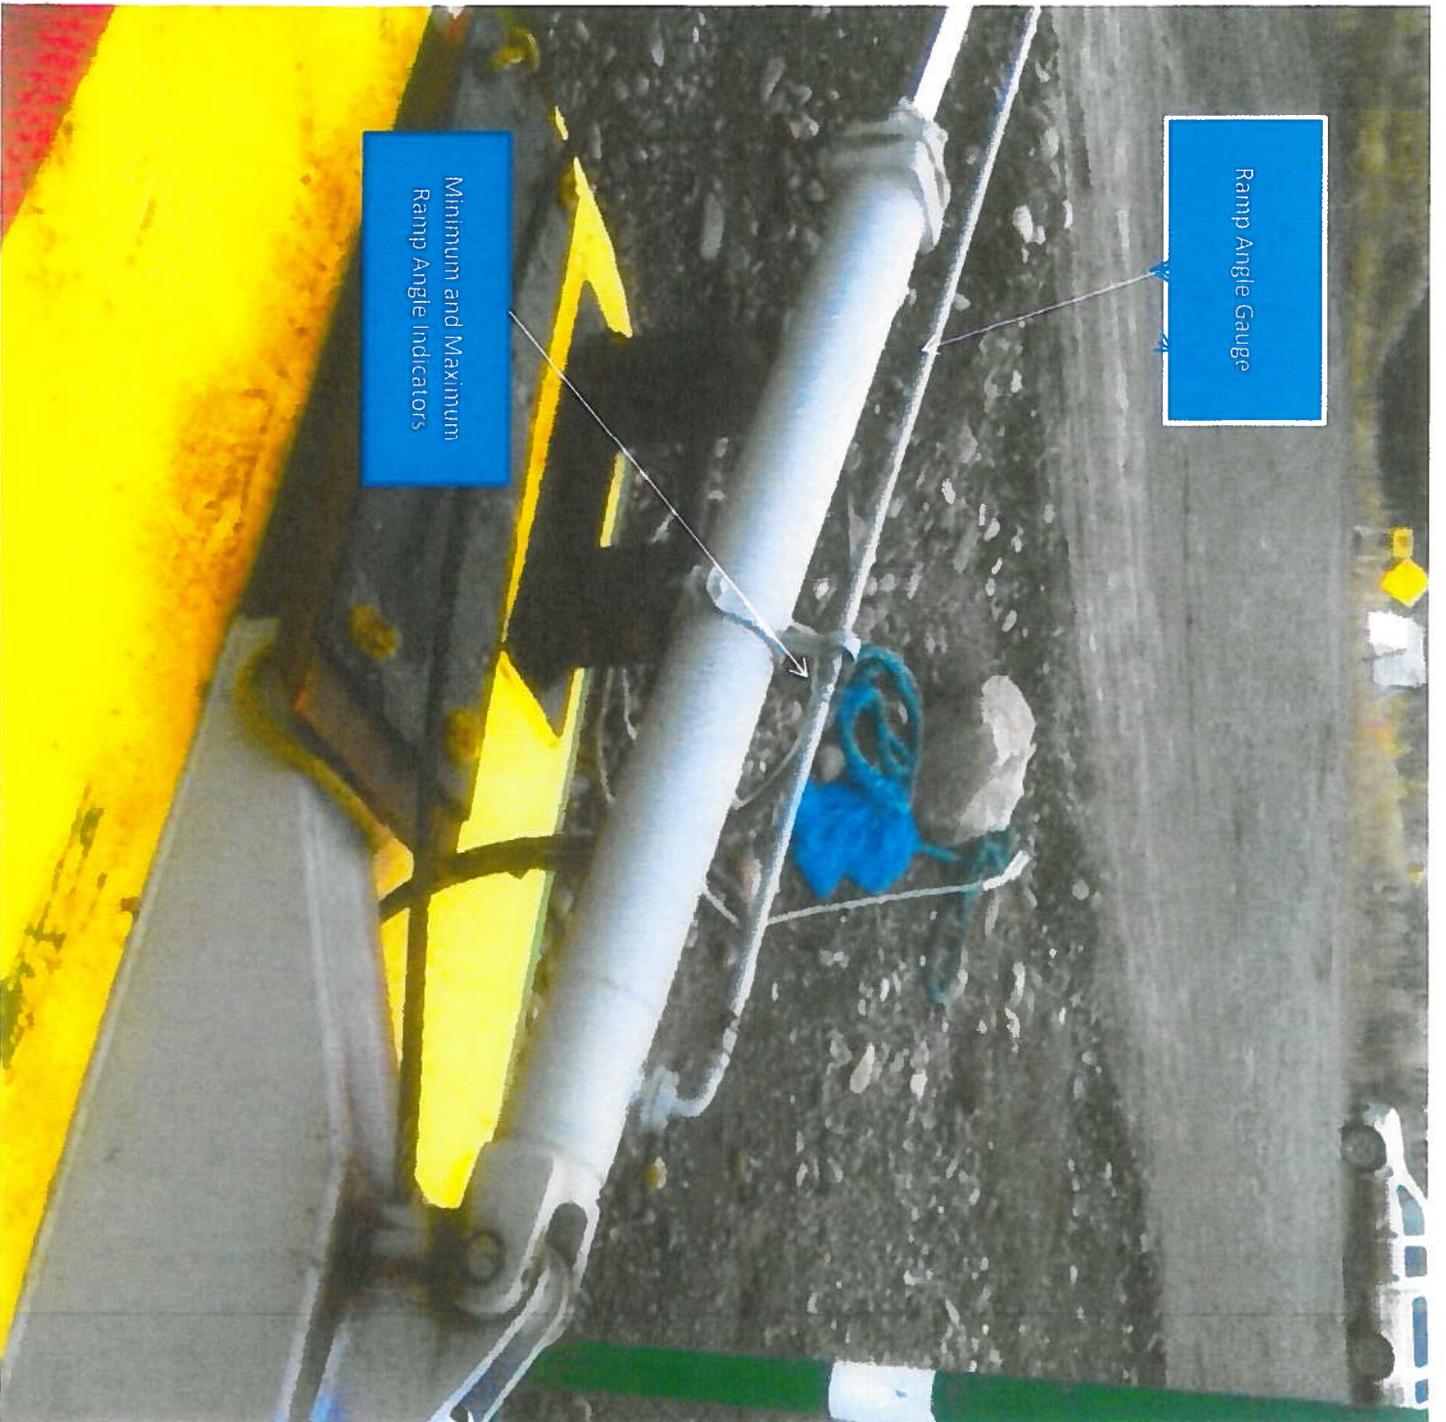

Ramp Angle Gauge

Minimum and Maximum Ramp Angle Indicators



Ramp Angle Gauge

Minimum and Maximum Ramp Angle Indicators