



2

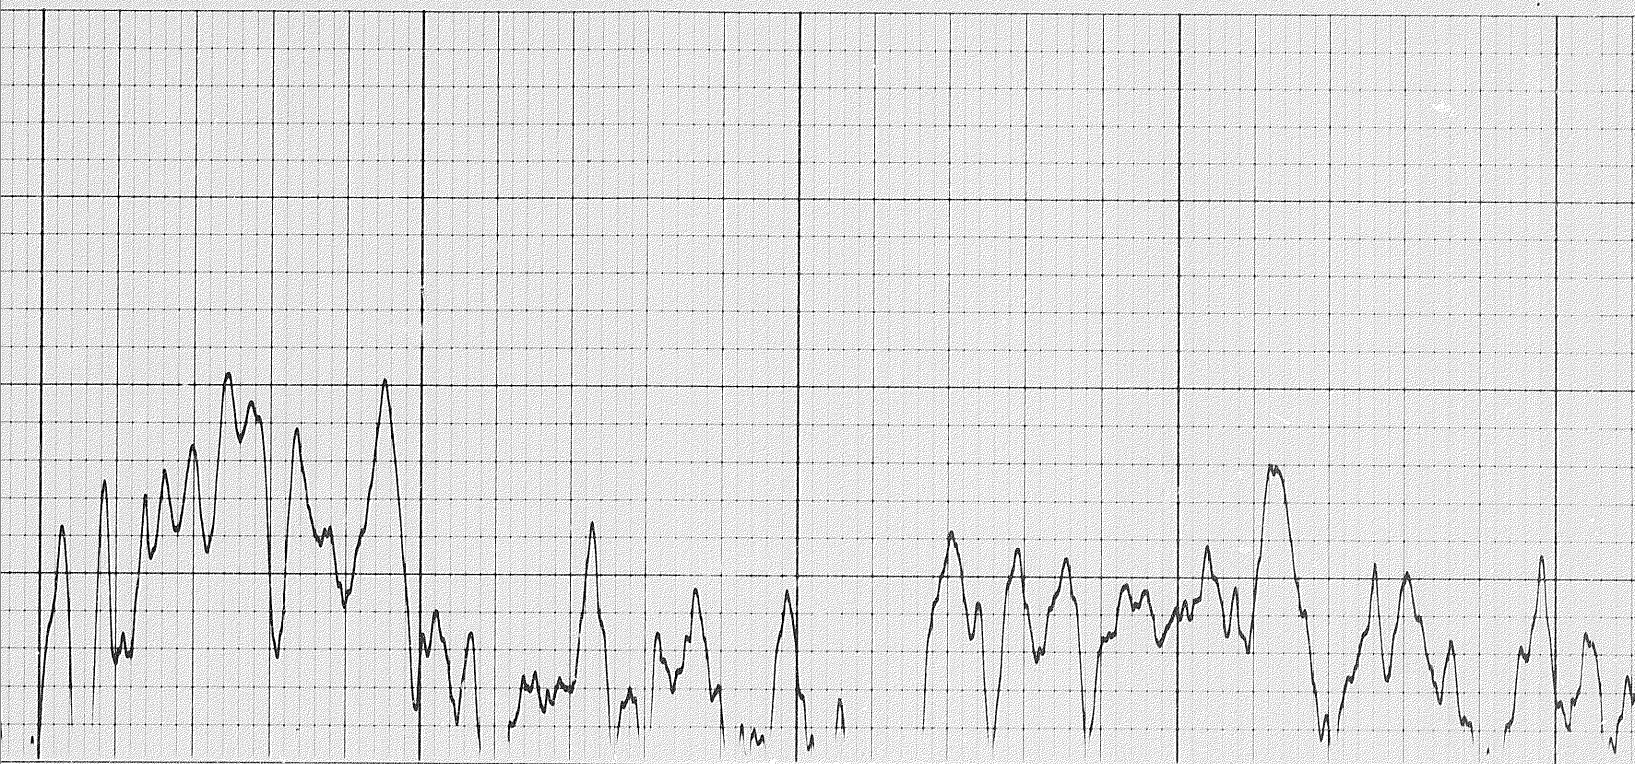


11400

11500

11600

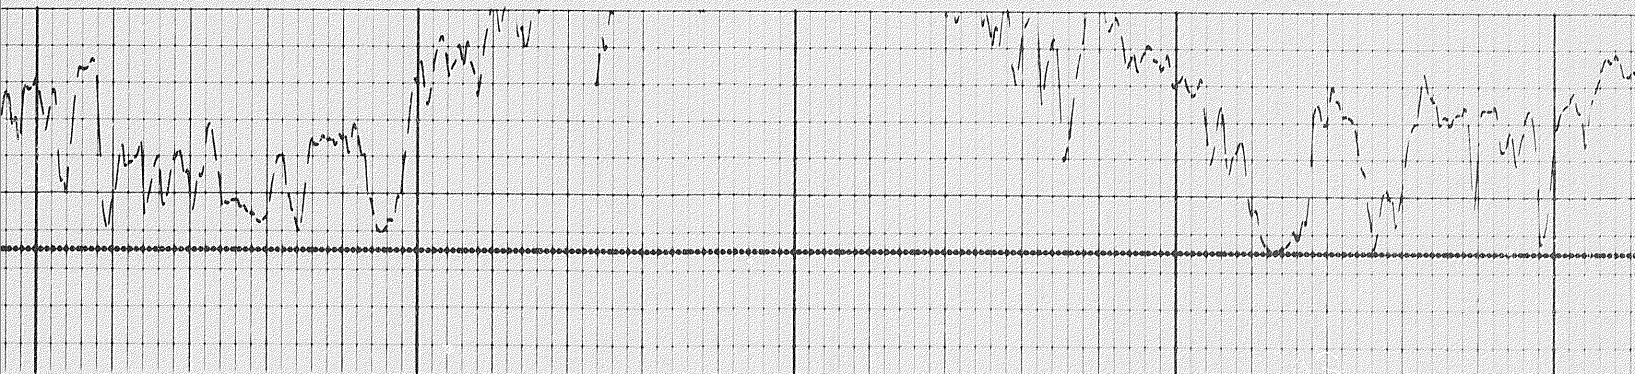


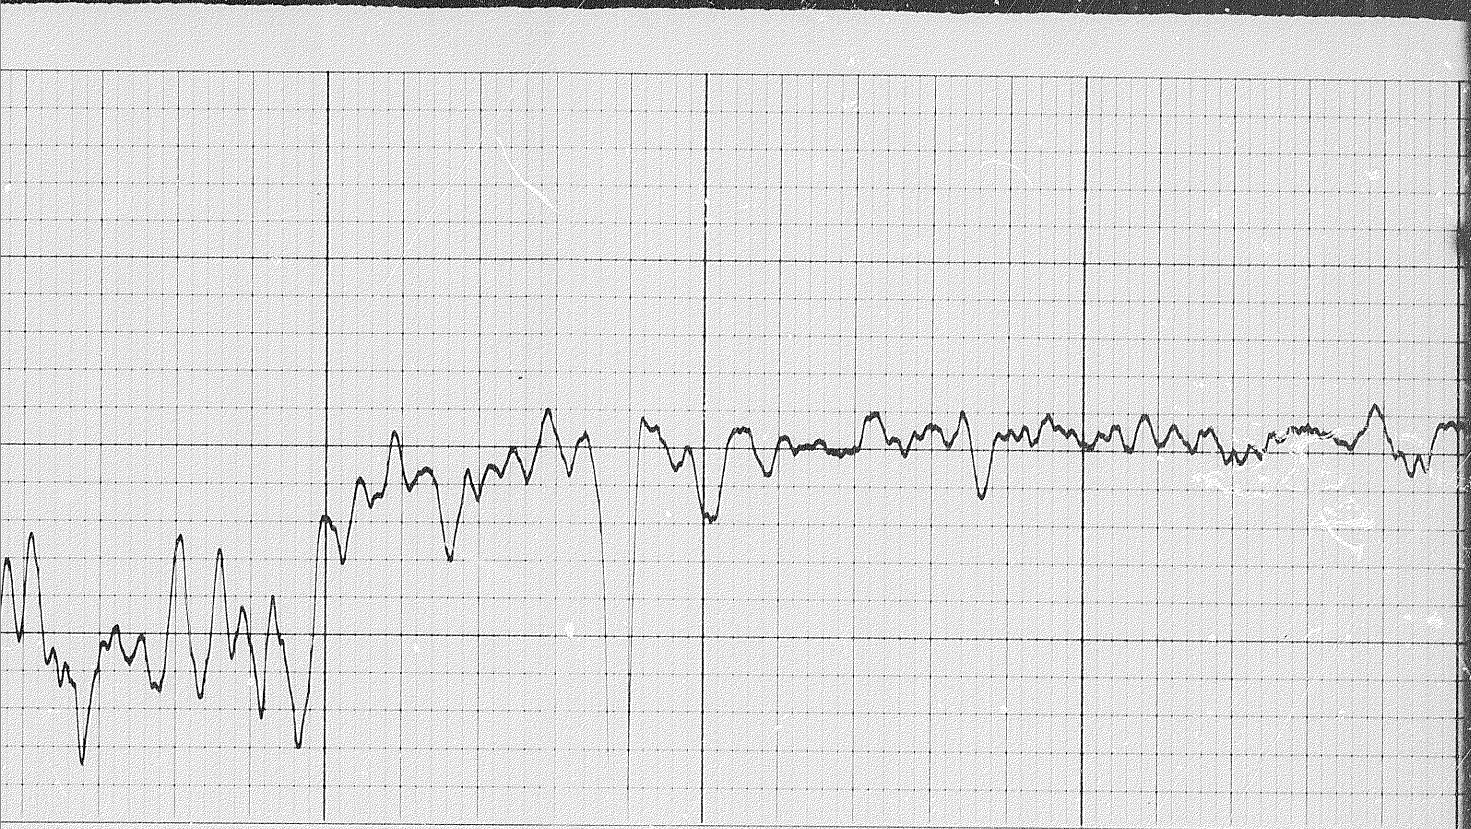

11700

11800




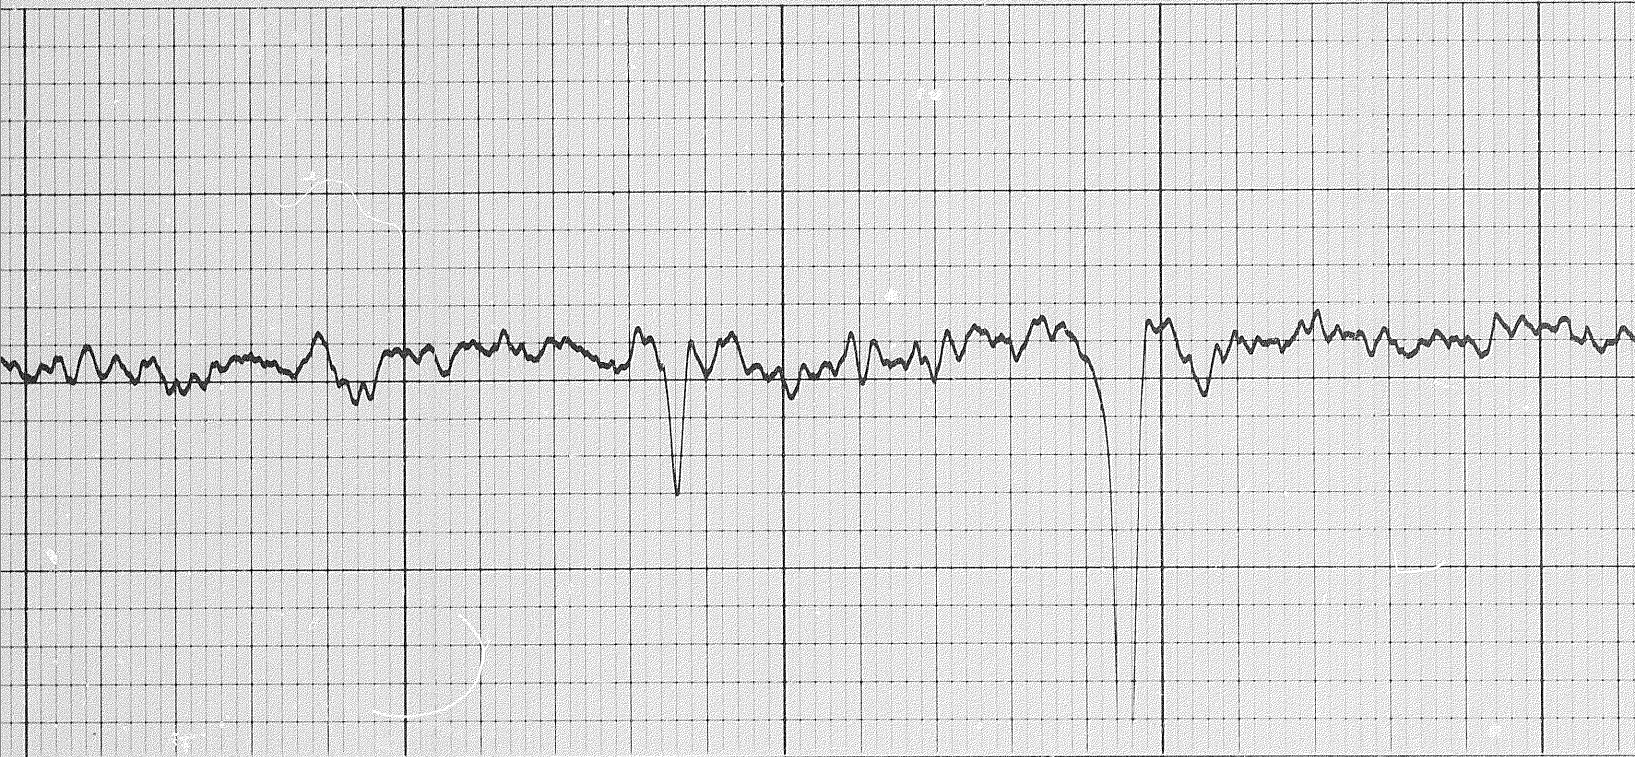


11800

11900

12000

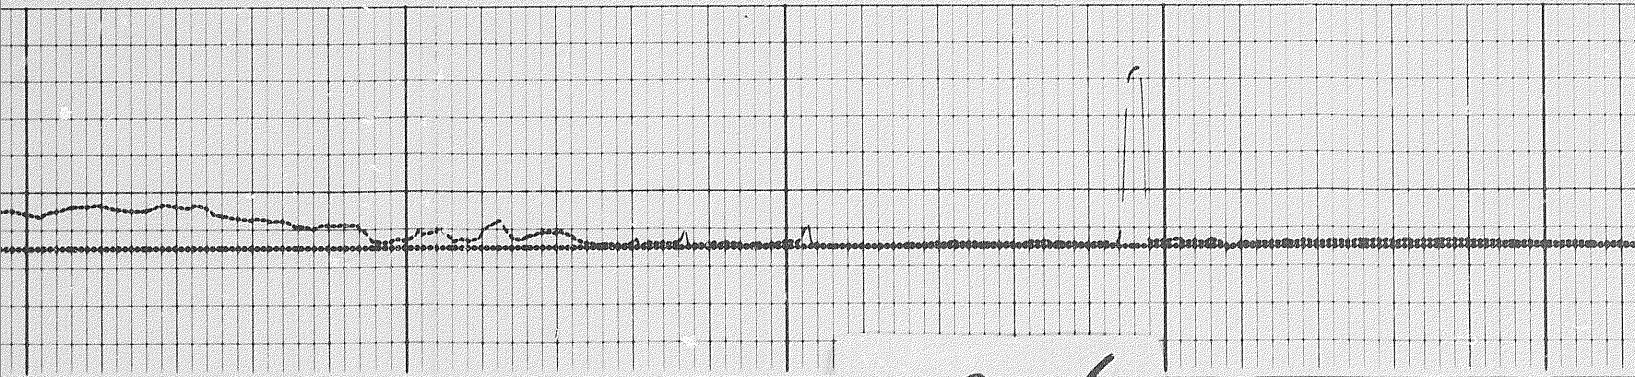



3 of

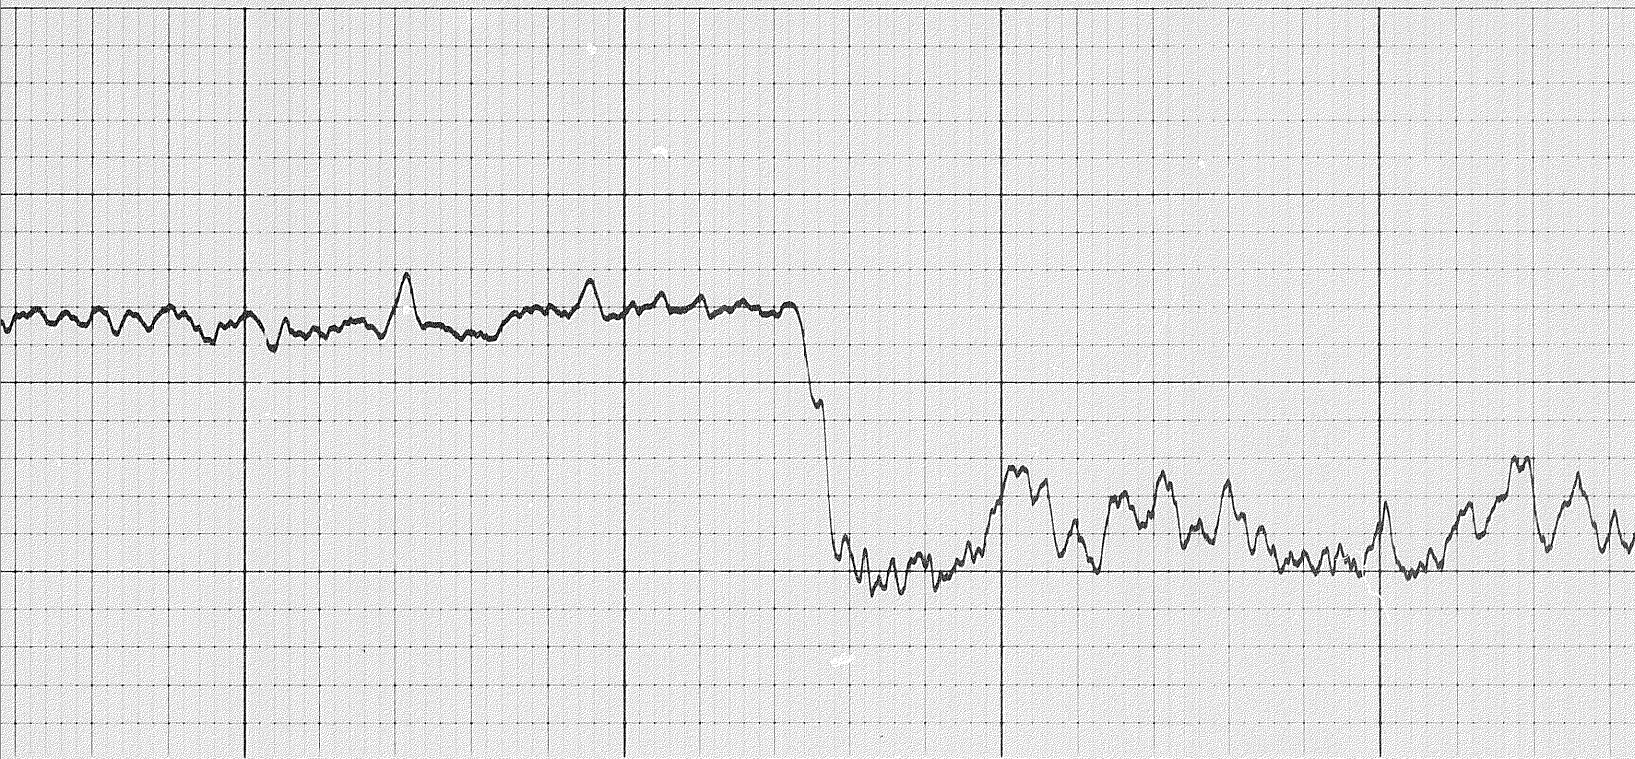


12100

12200

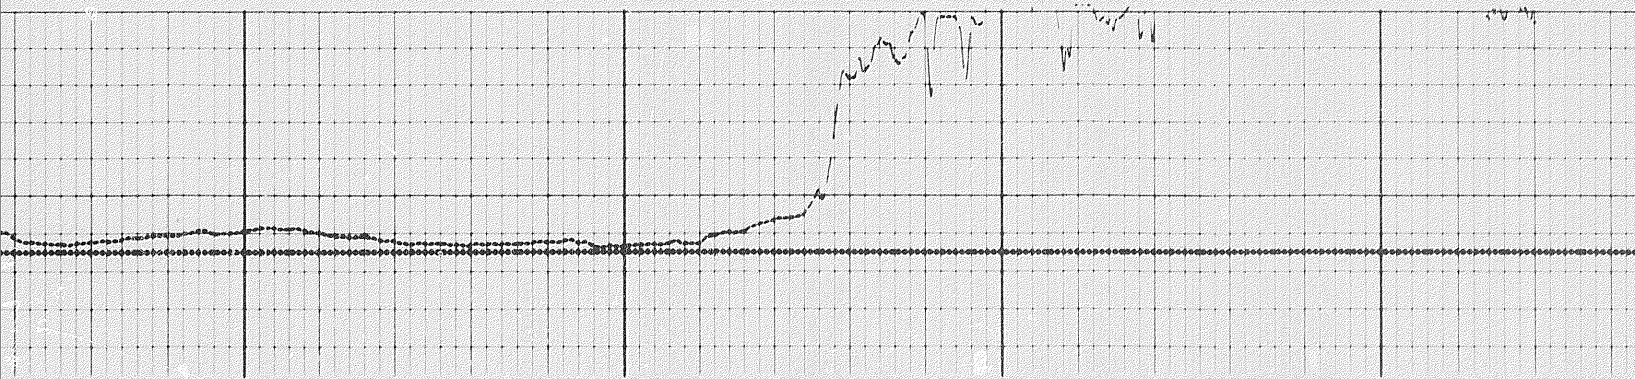


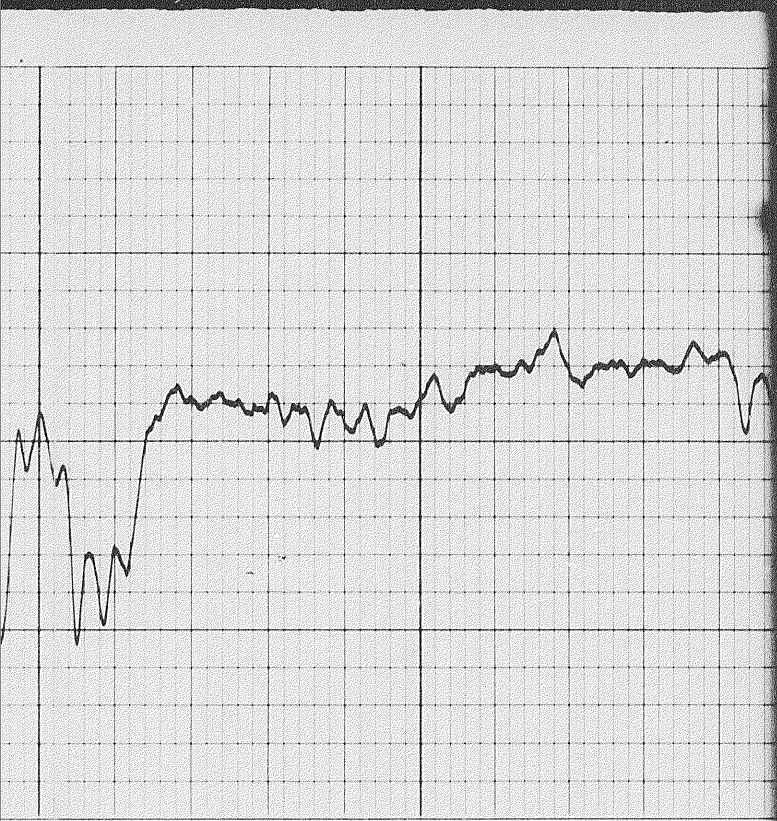


12400

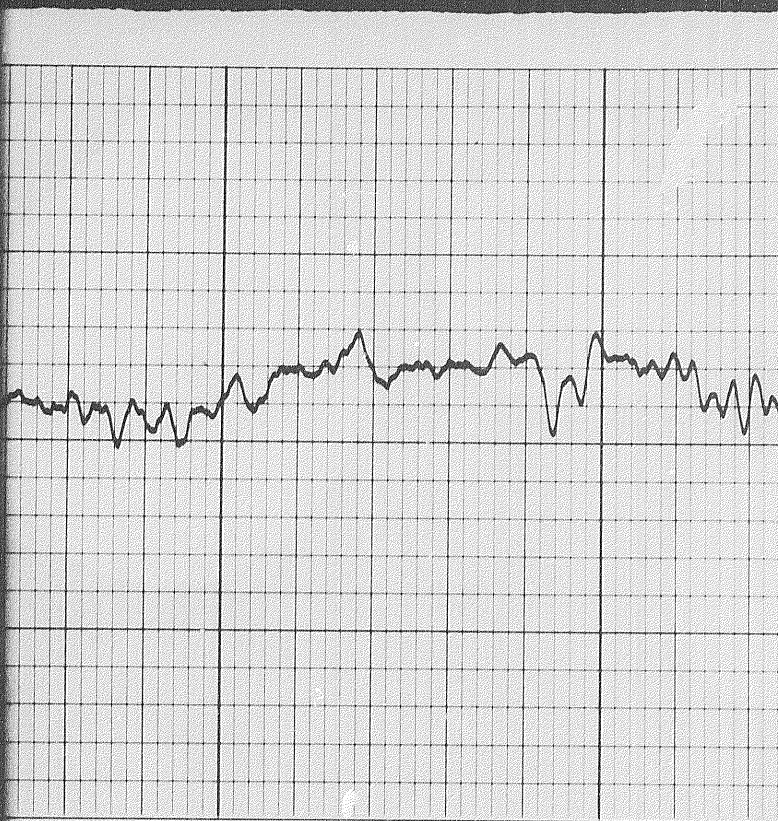


12400


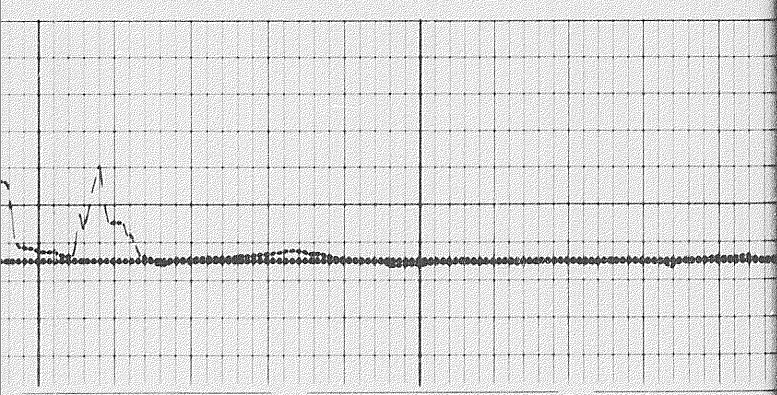


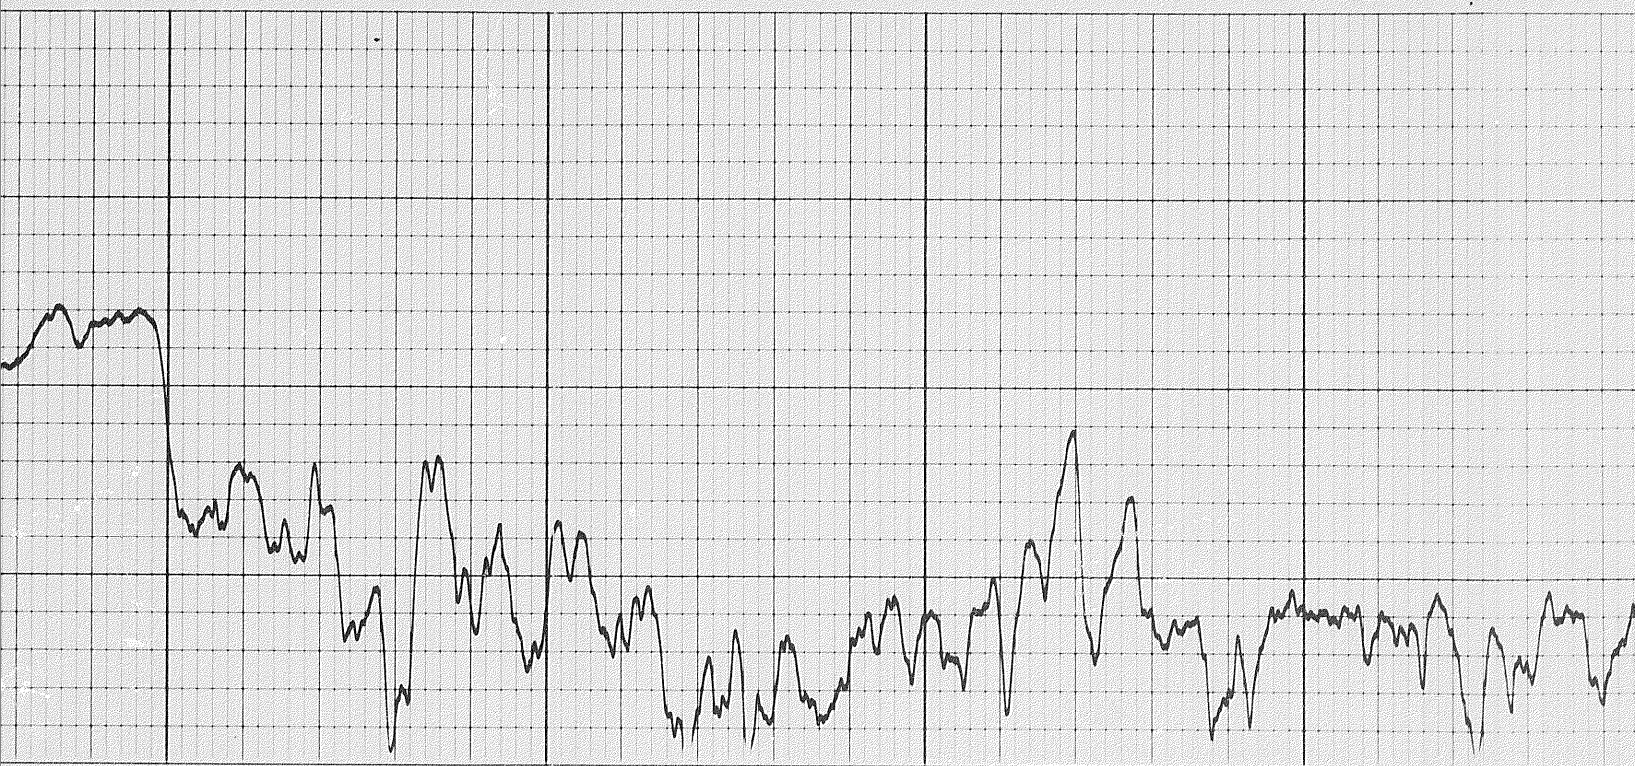

12600

12700

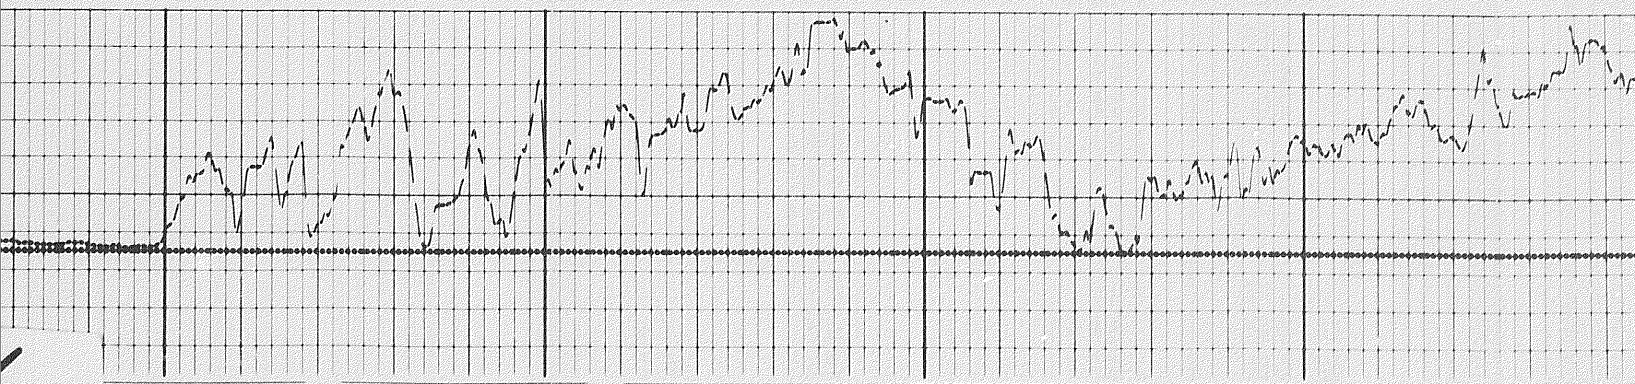


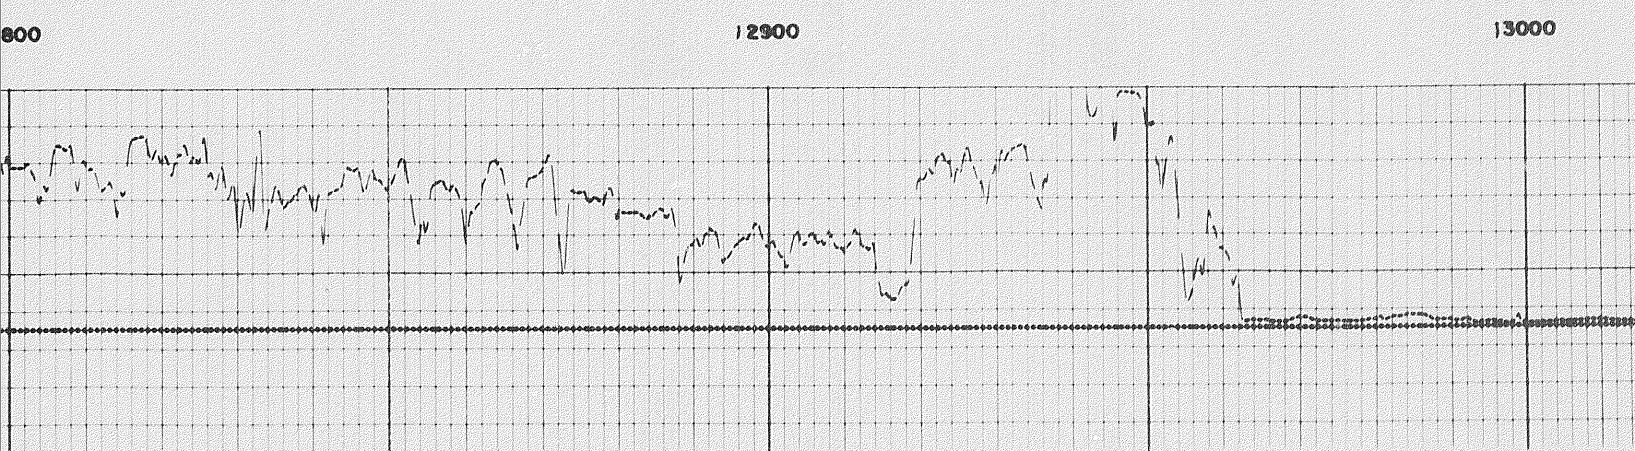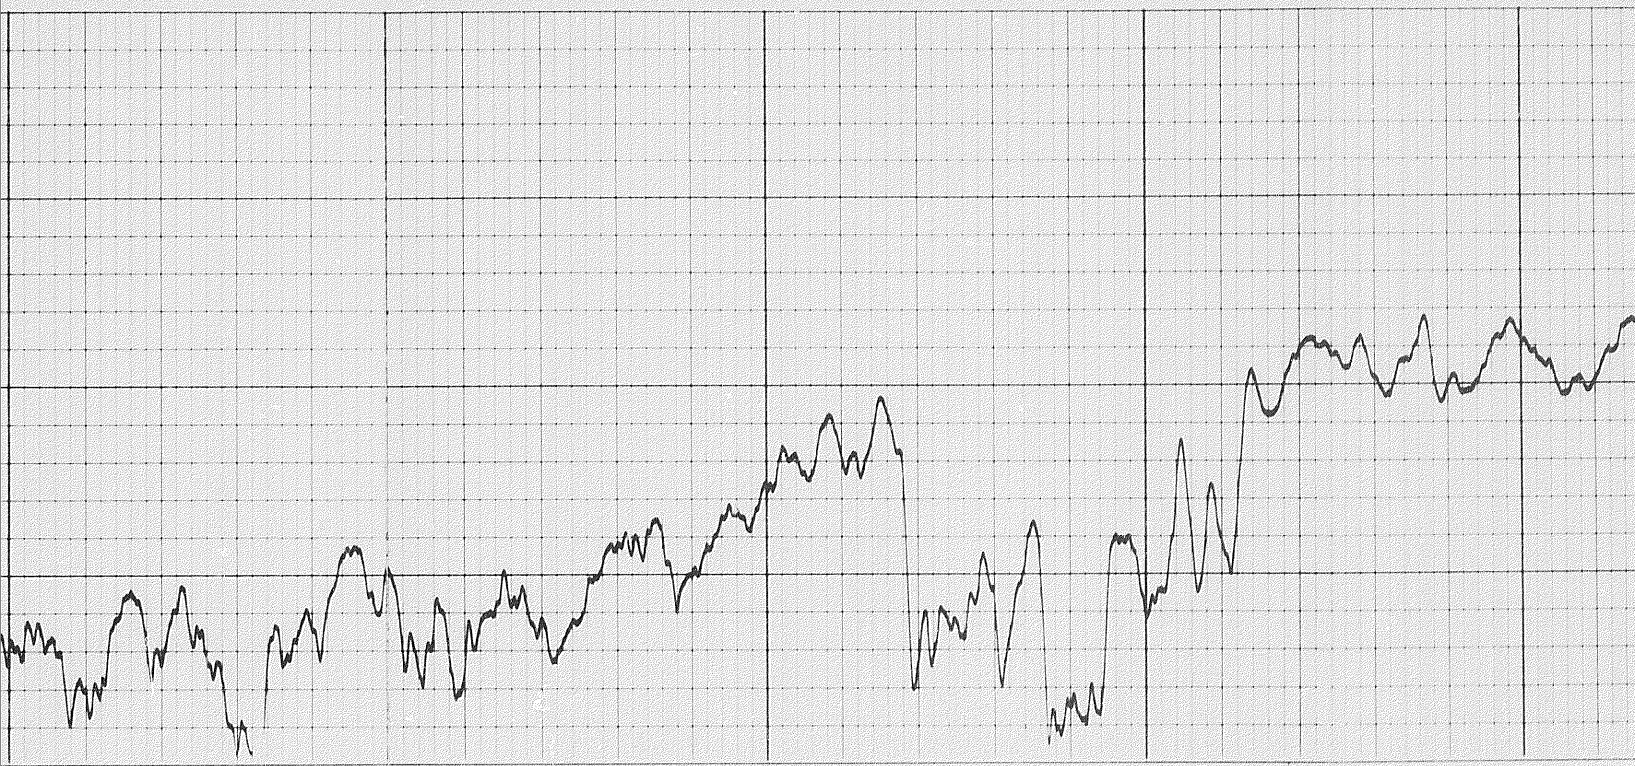

800


12900

13000

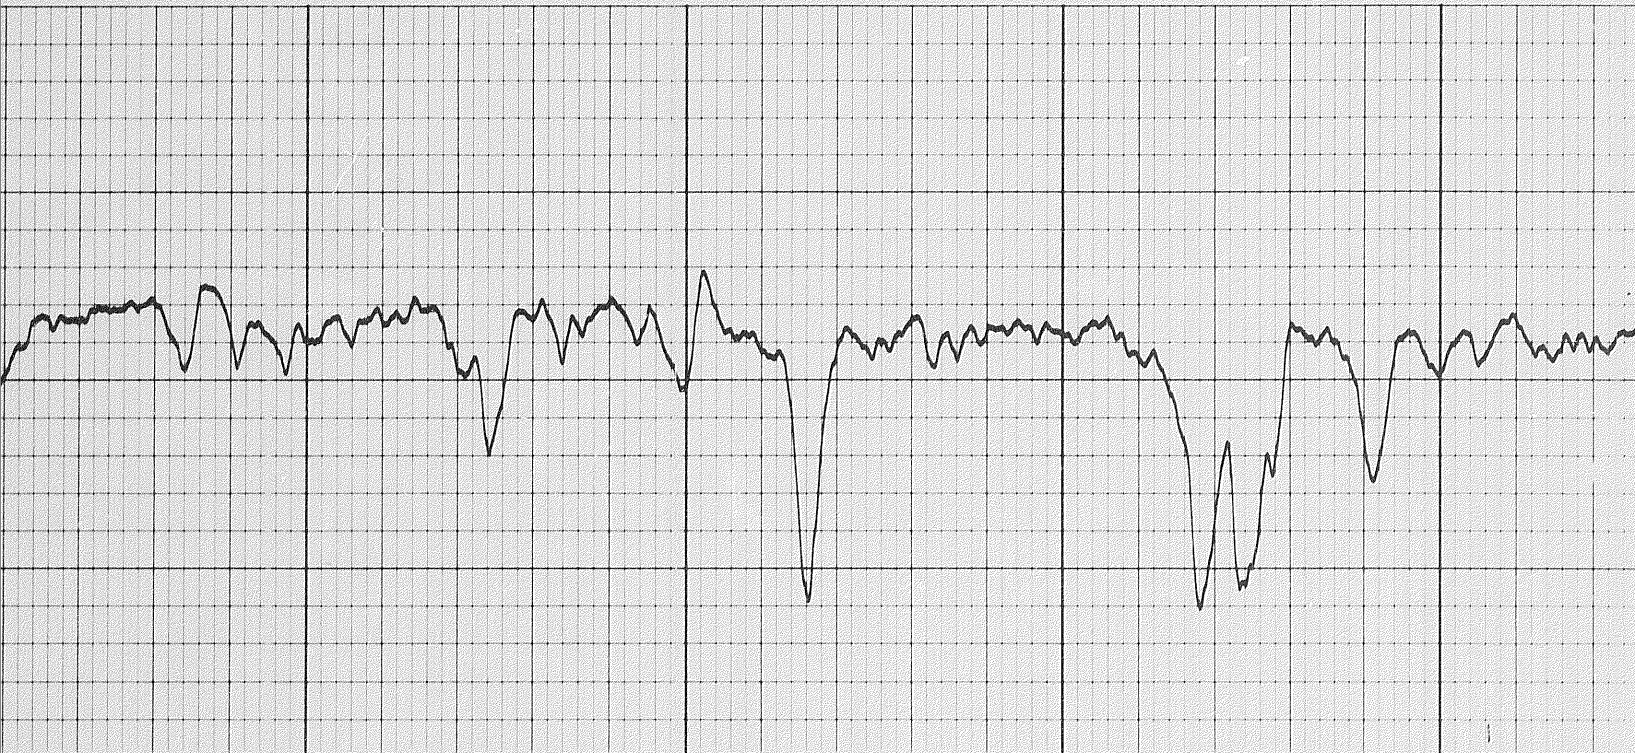


13100

13200

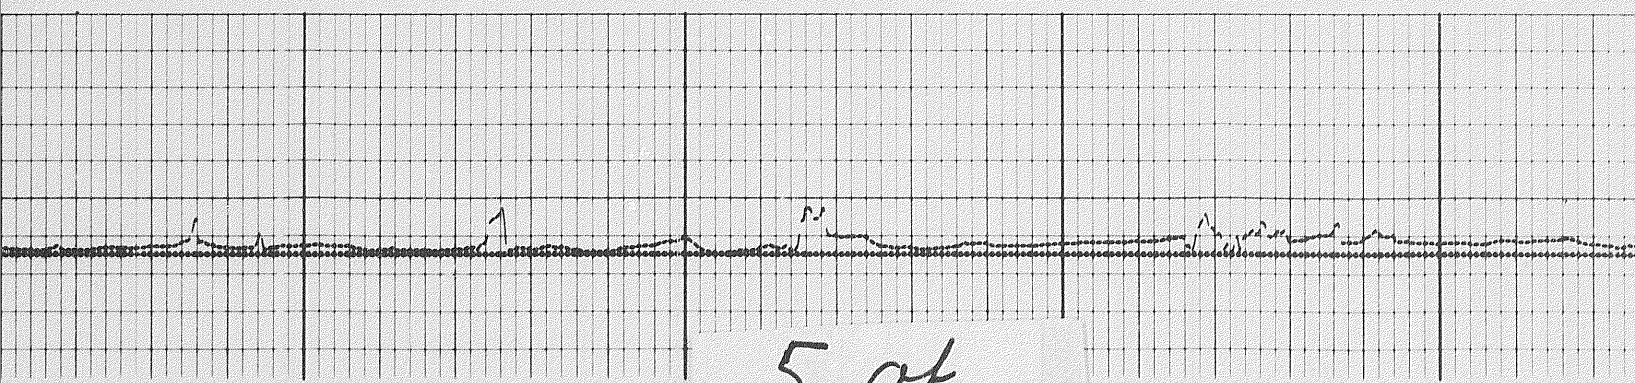

5 of

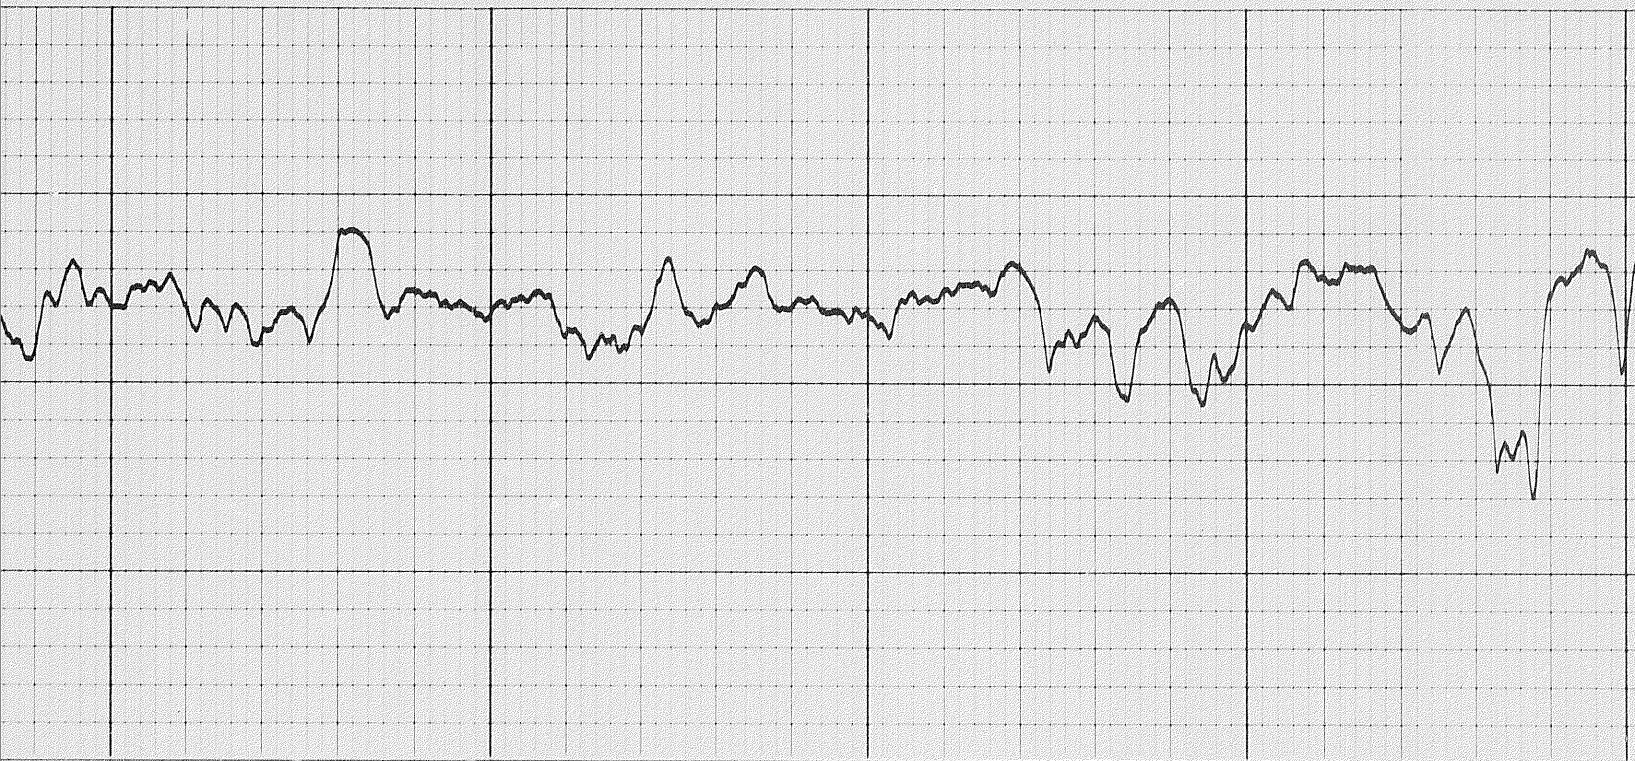


13300


13400

13500





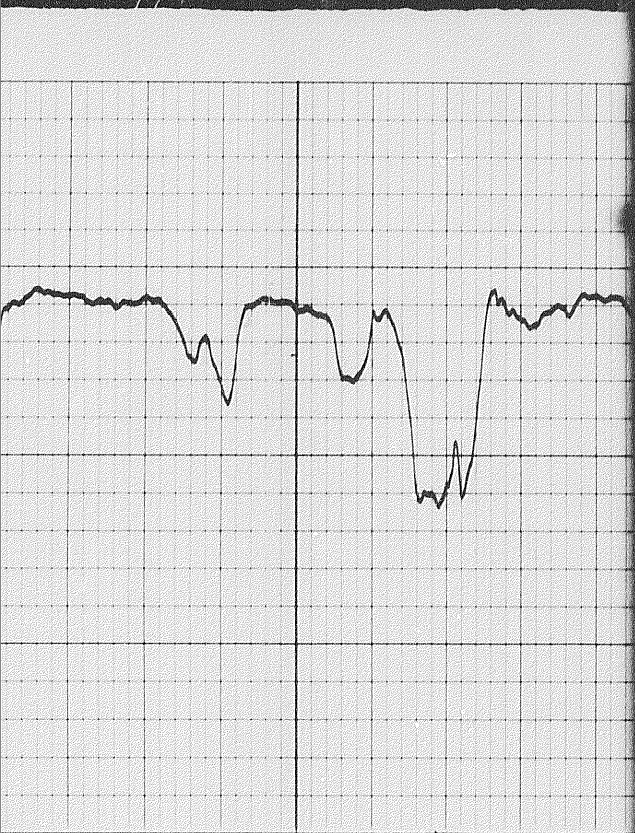


13600

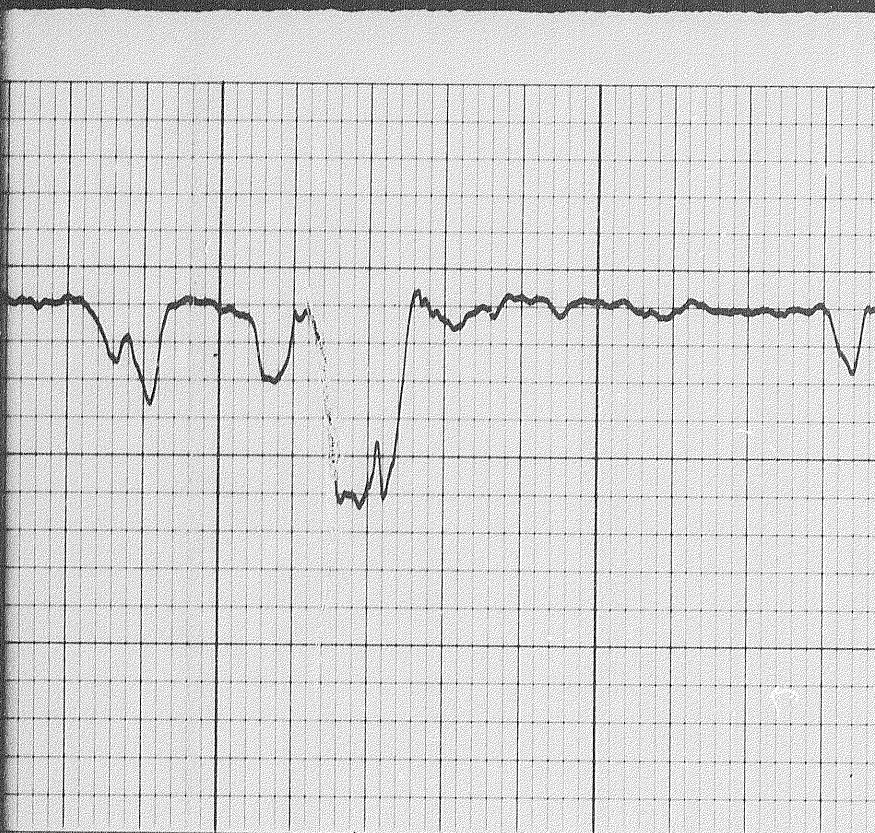


13600

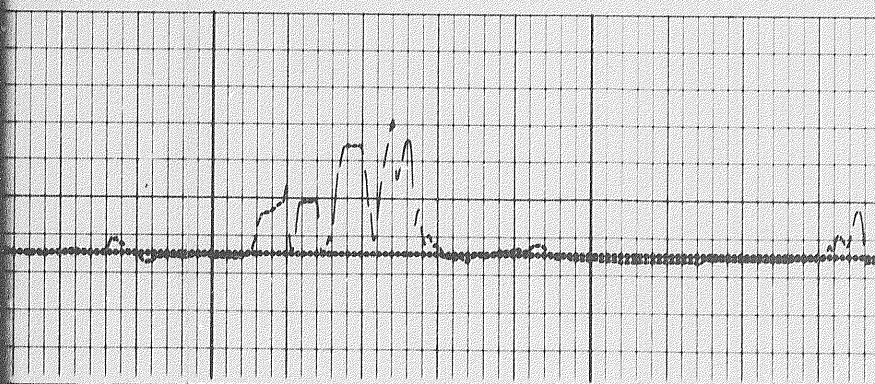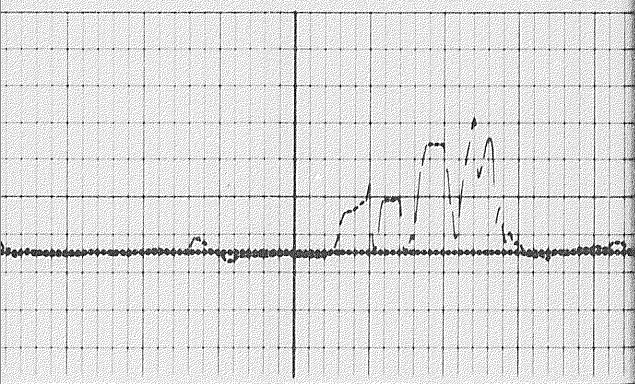


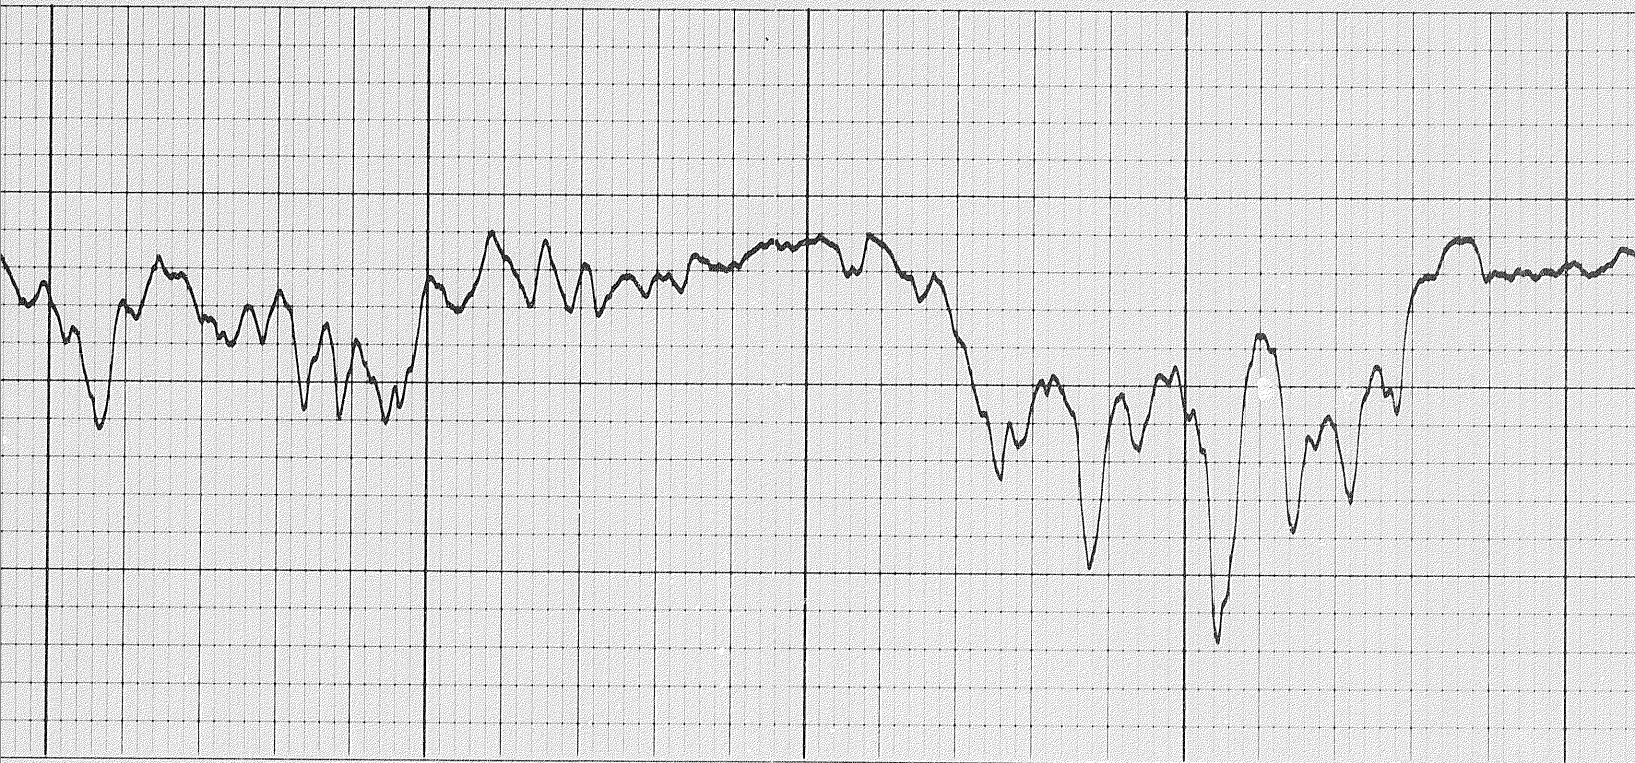

13800


13900


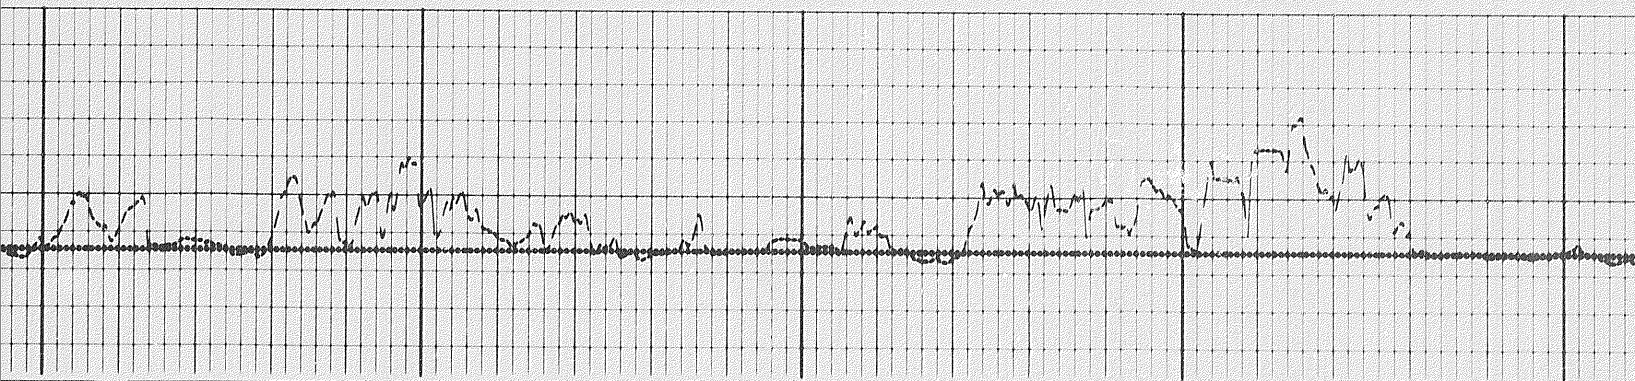


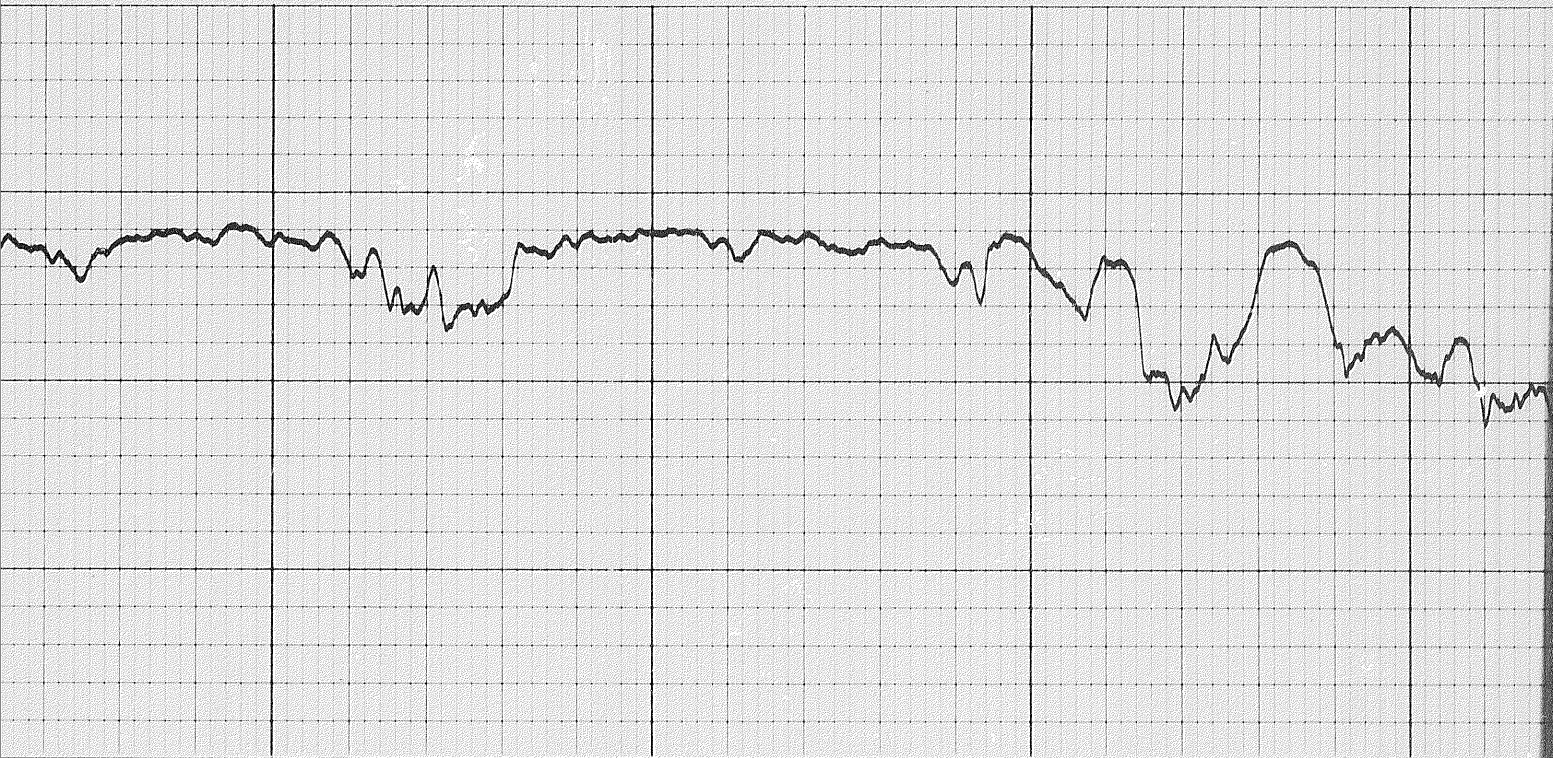

14100

14200

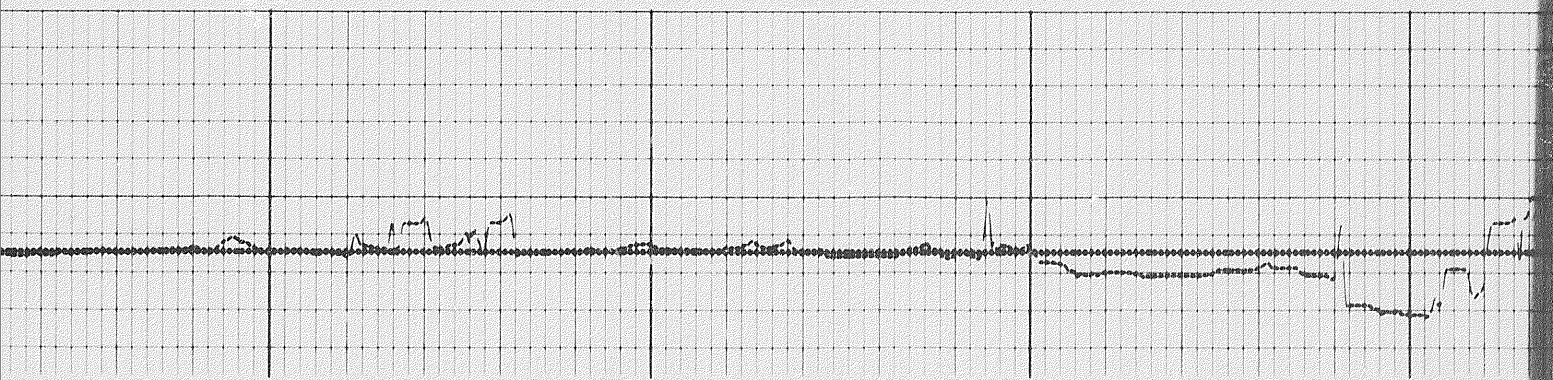


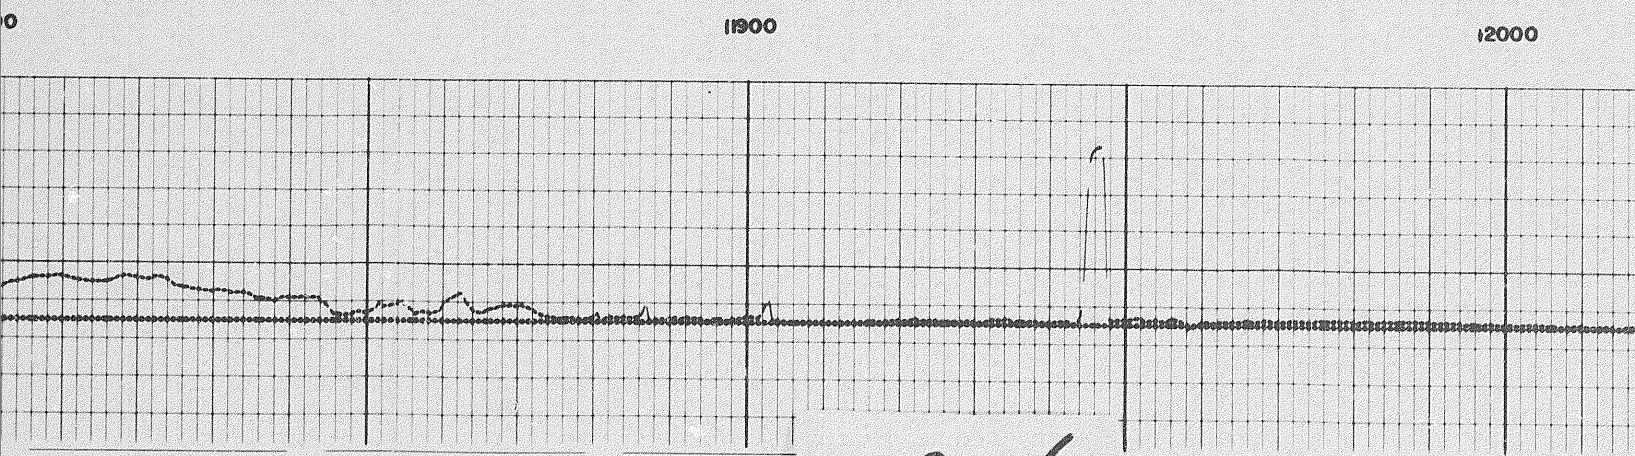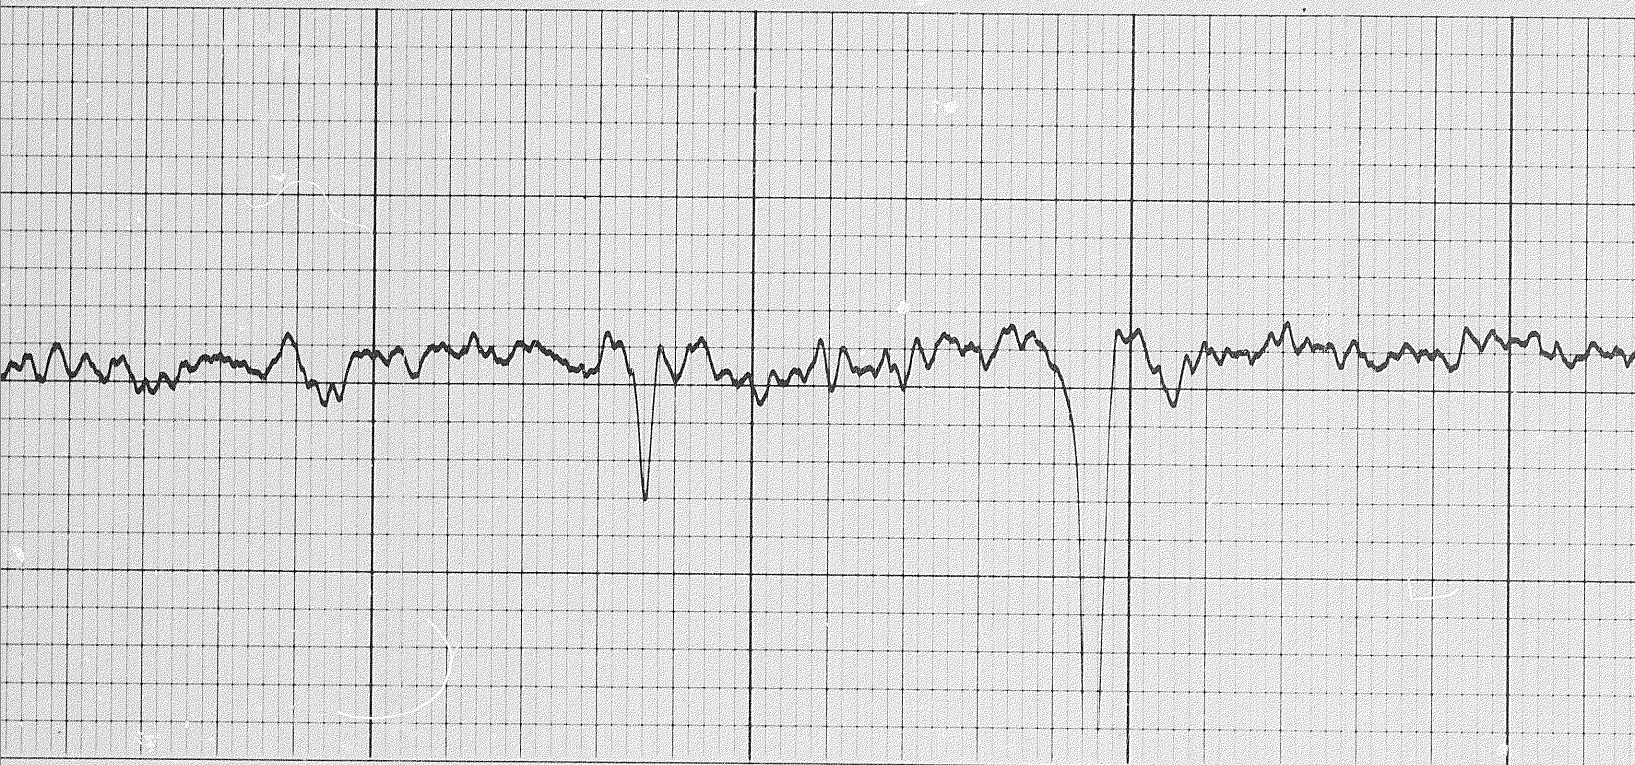

11900


12000


3 of

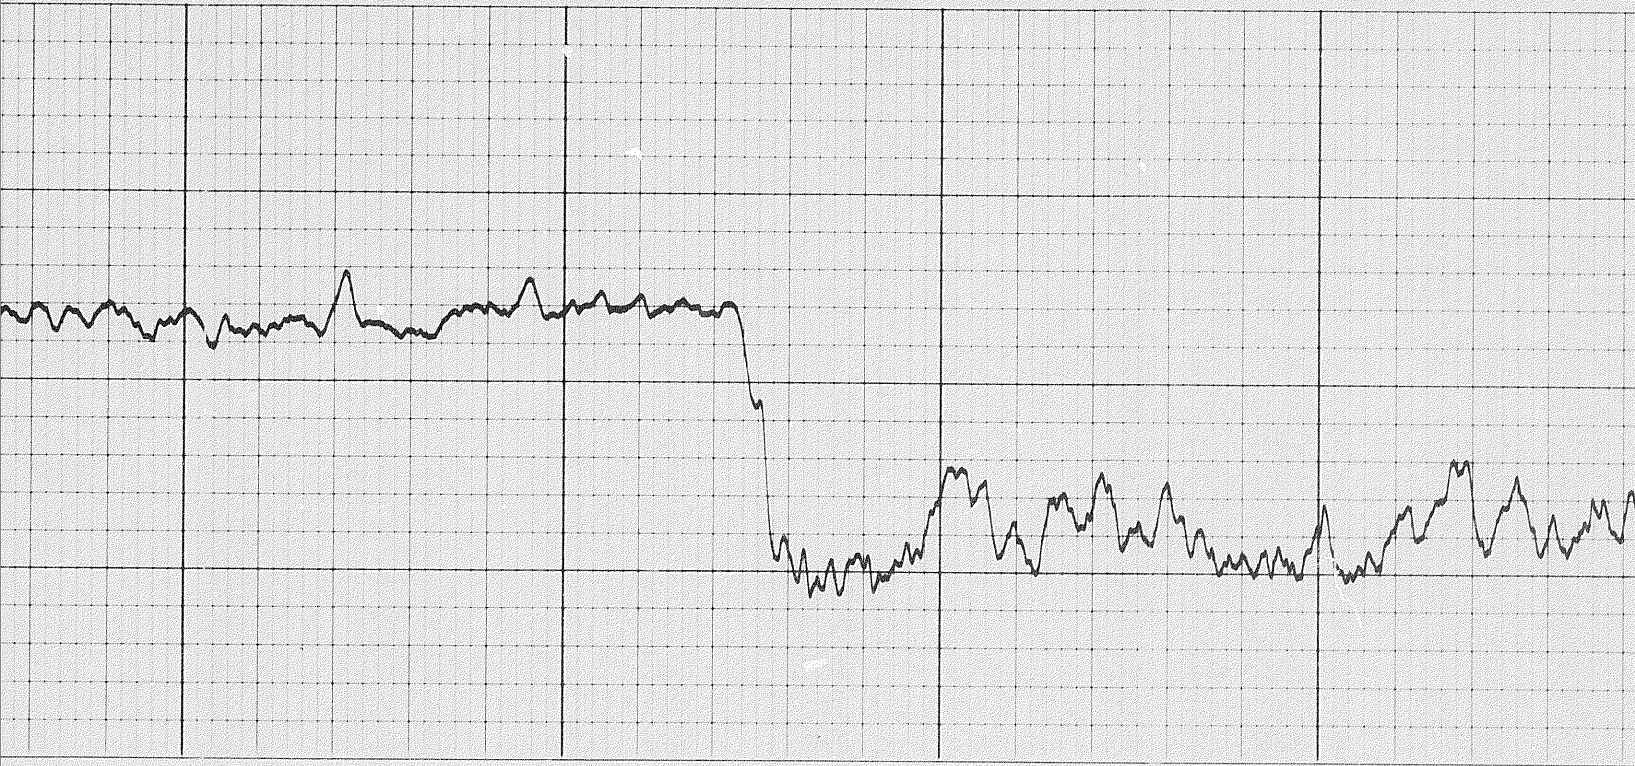


12100

12200


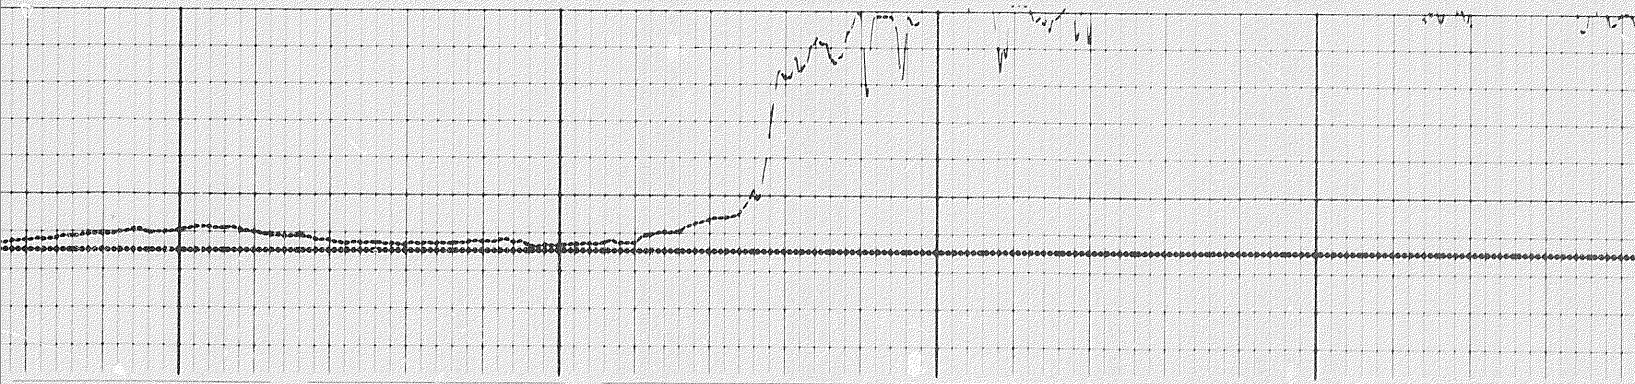


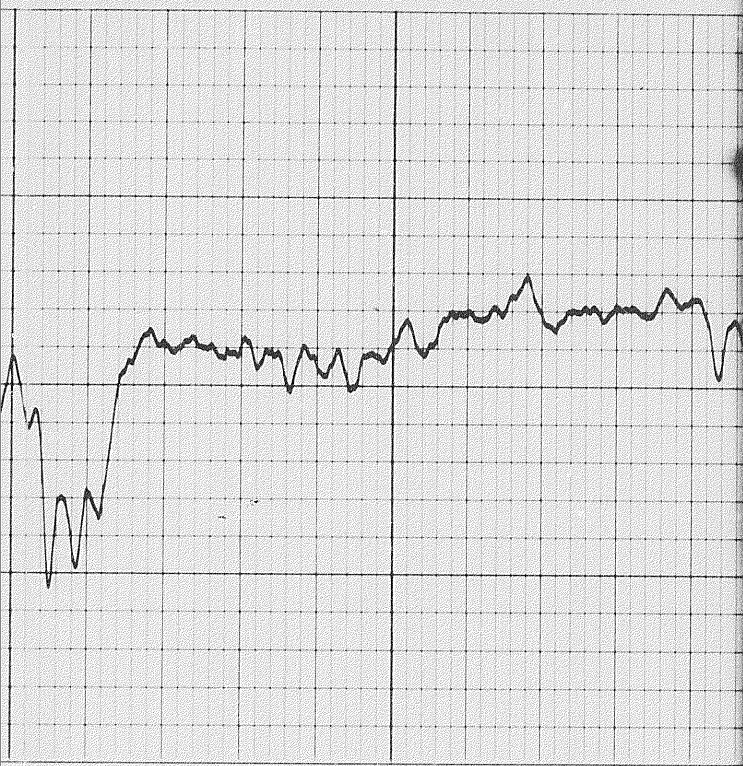


12400

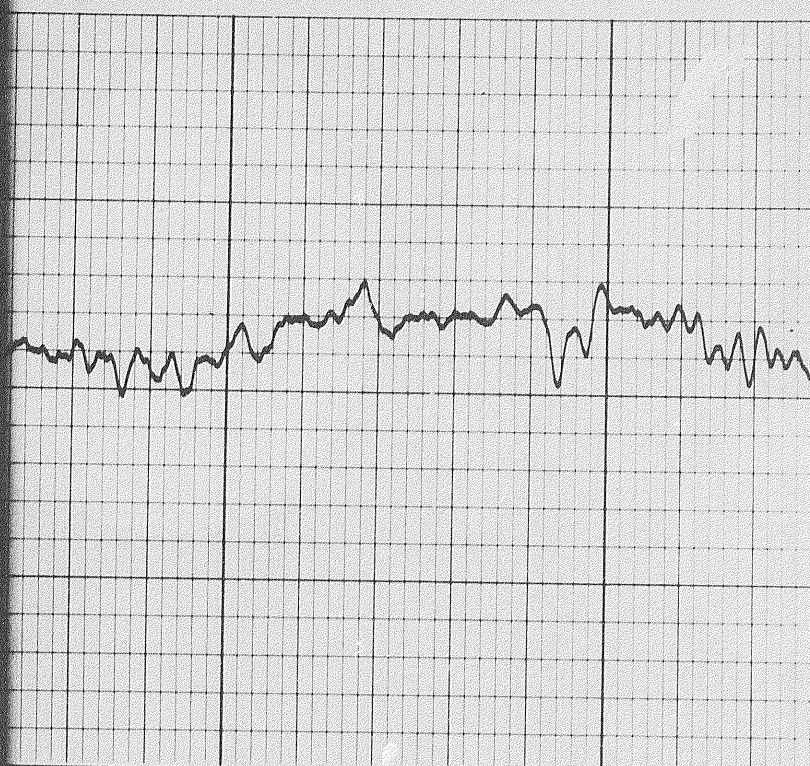


12400

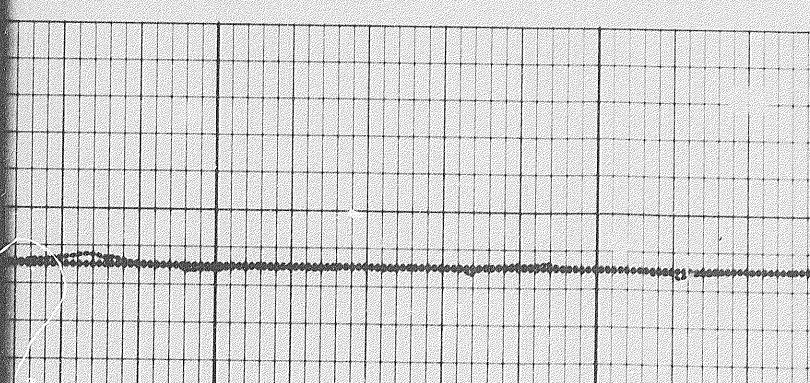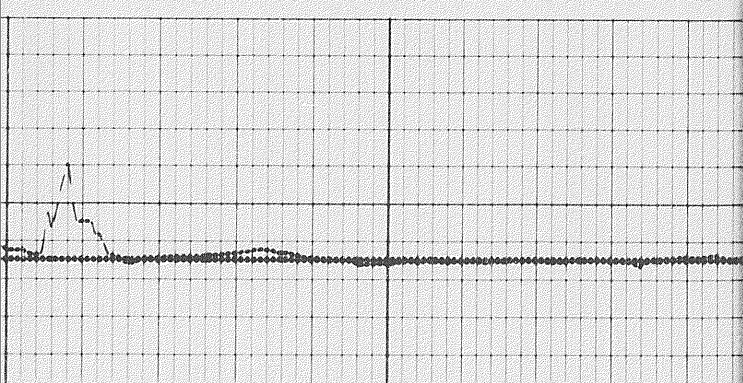


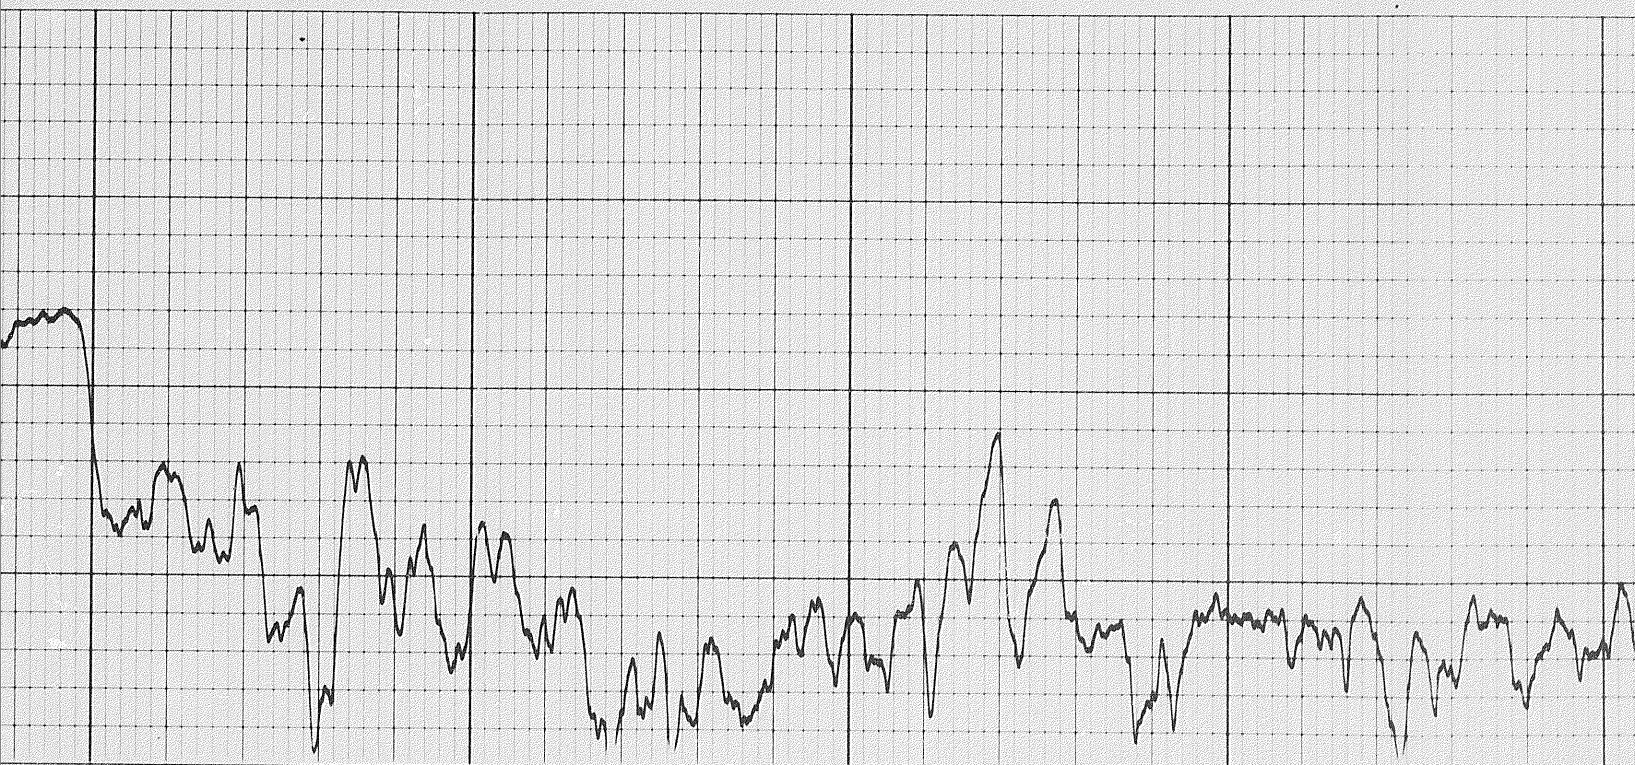

12600

12700

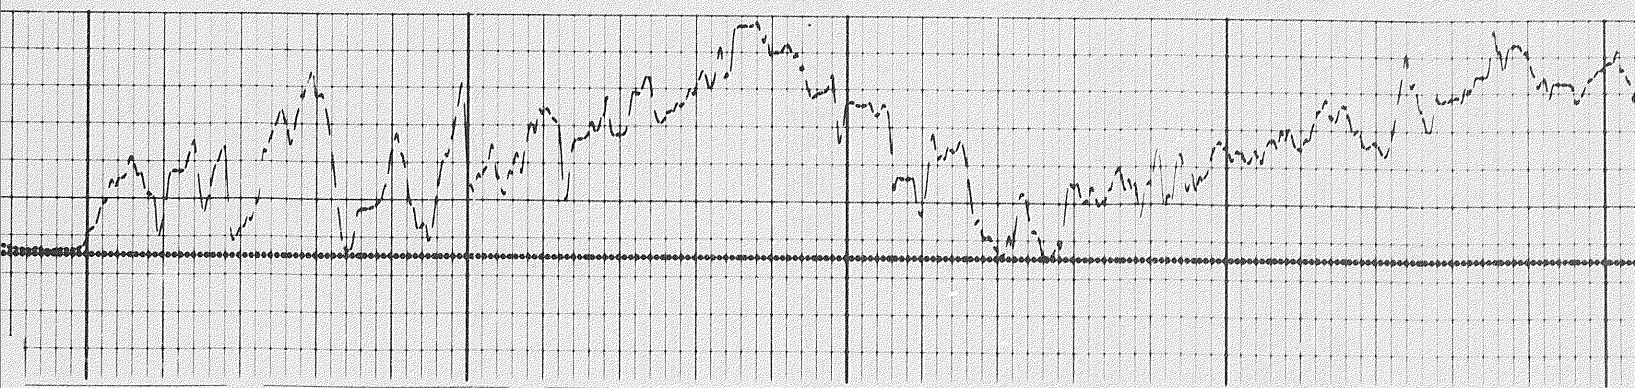


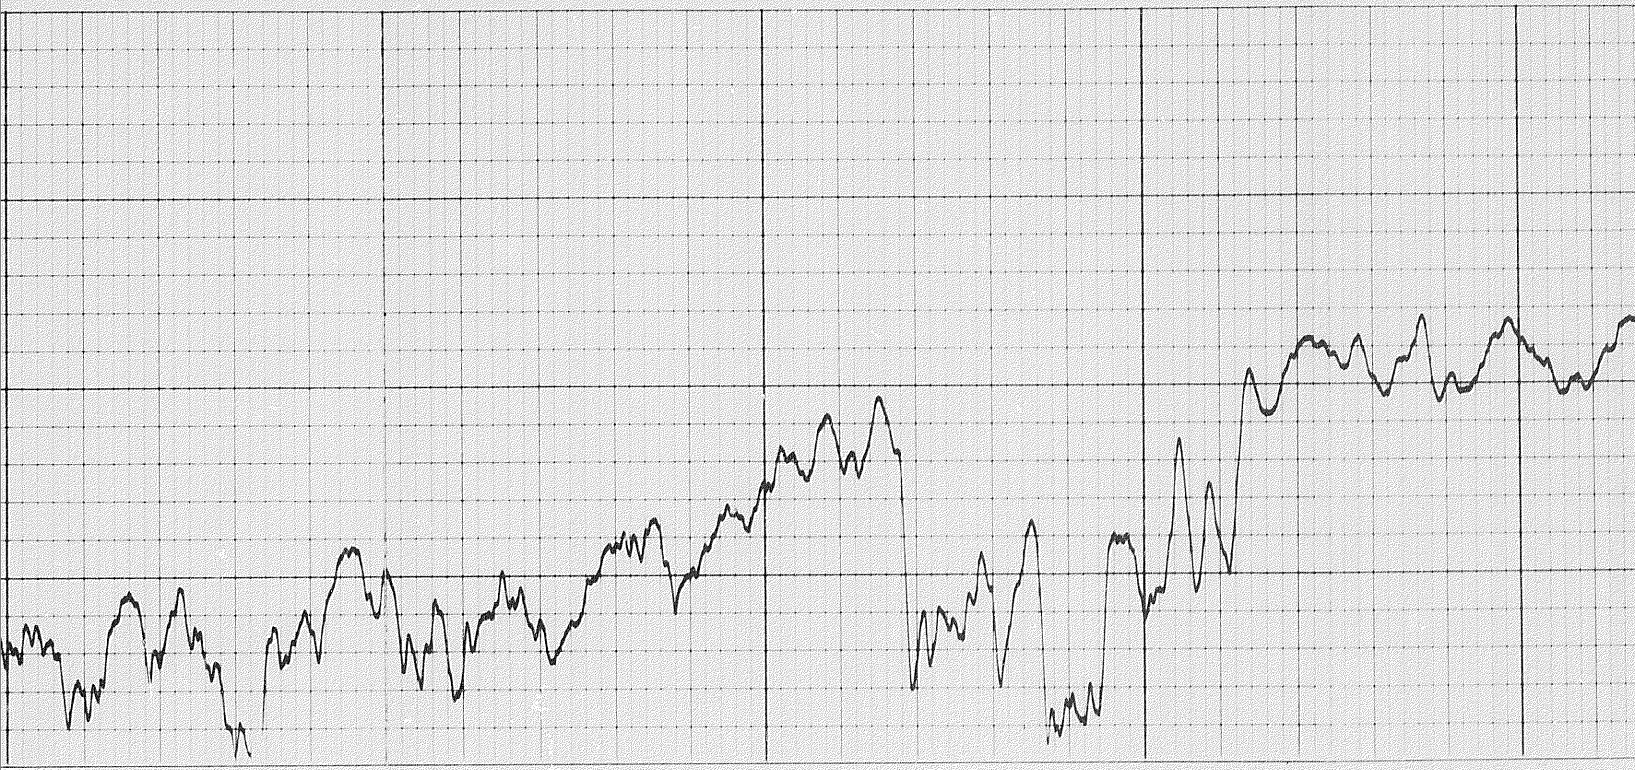


800

12900


13000

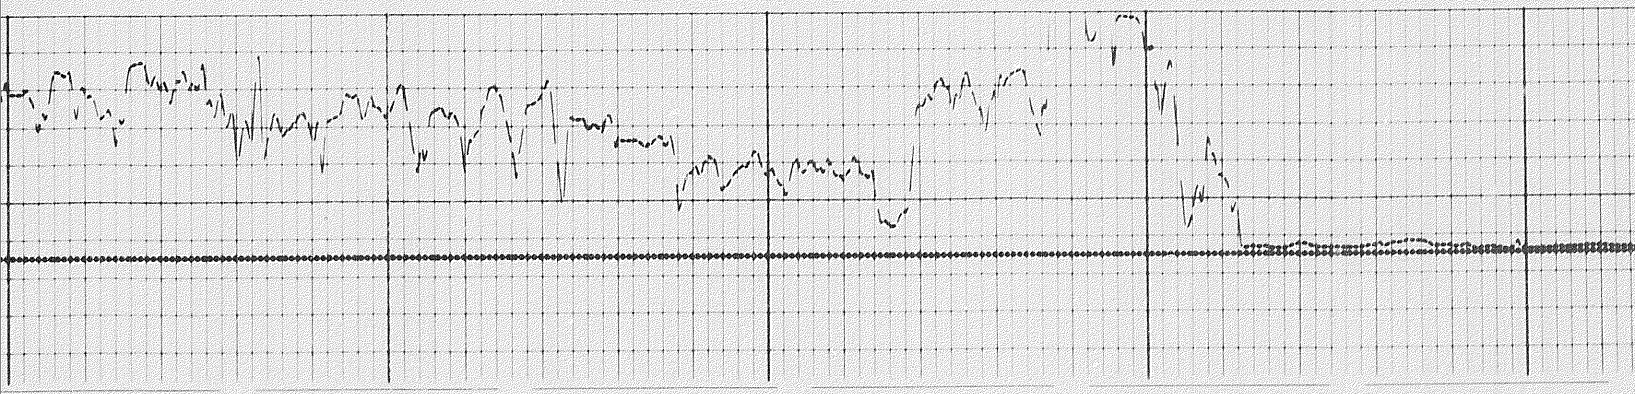

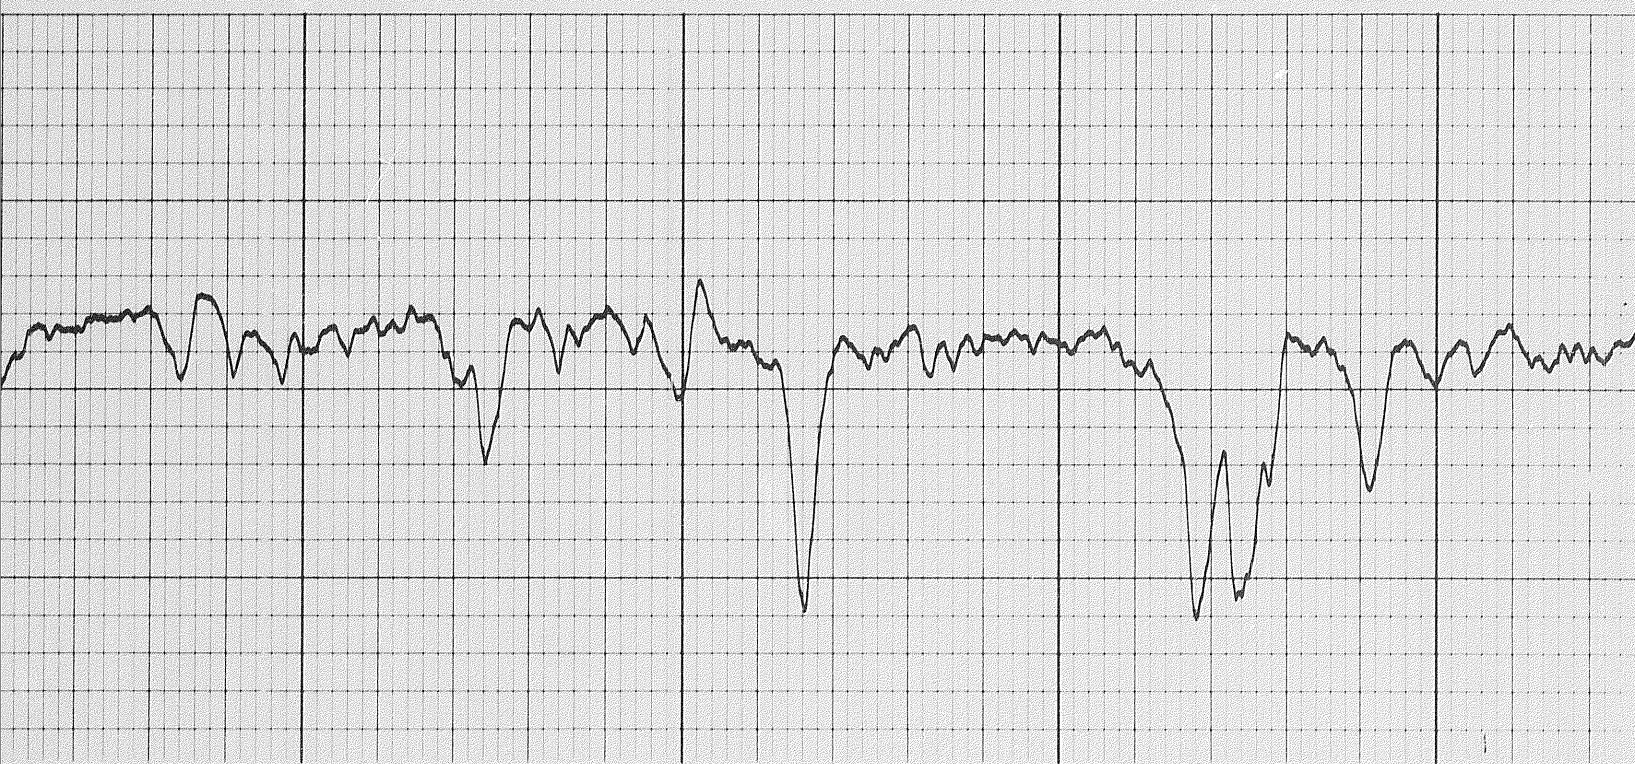


13100

13200

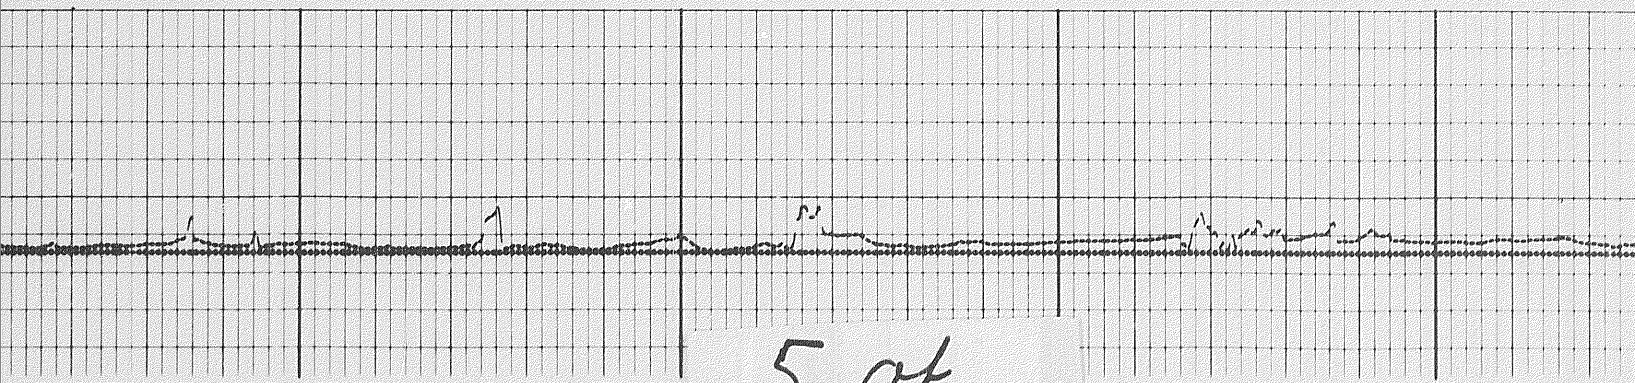



5 of

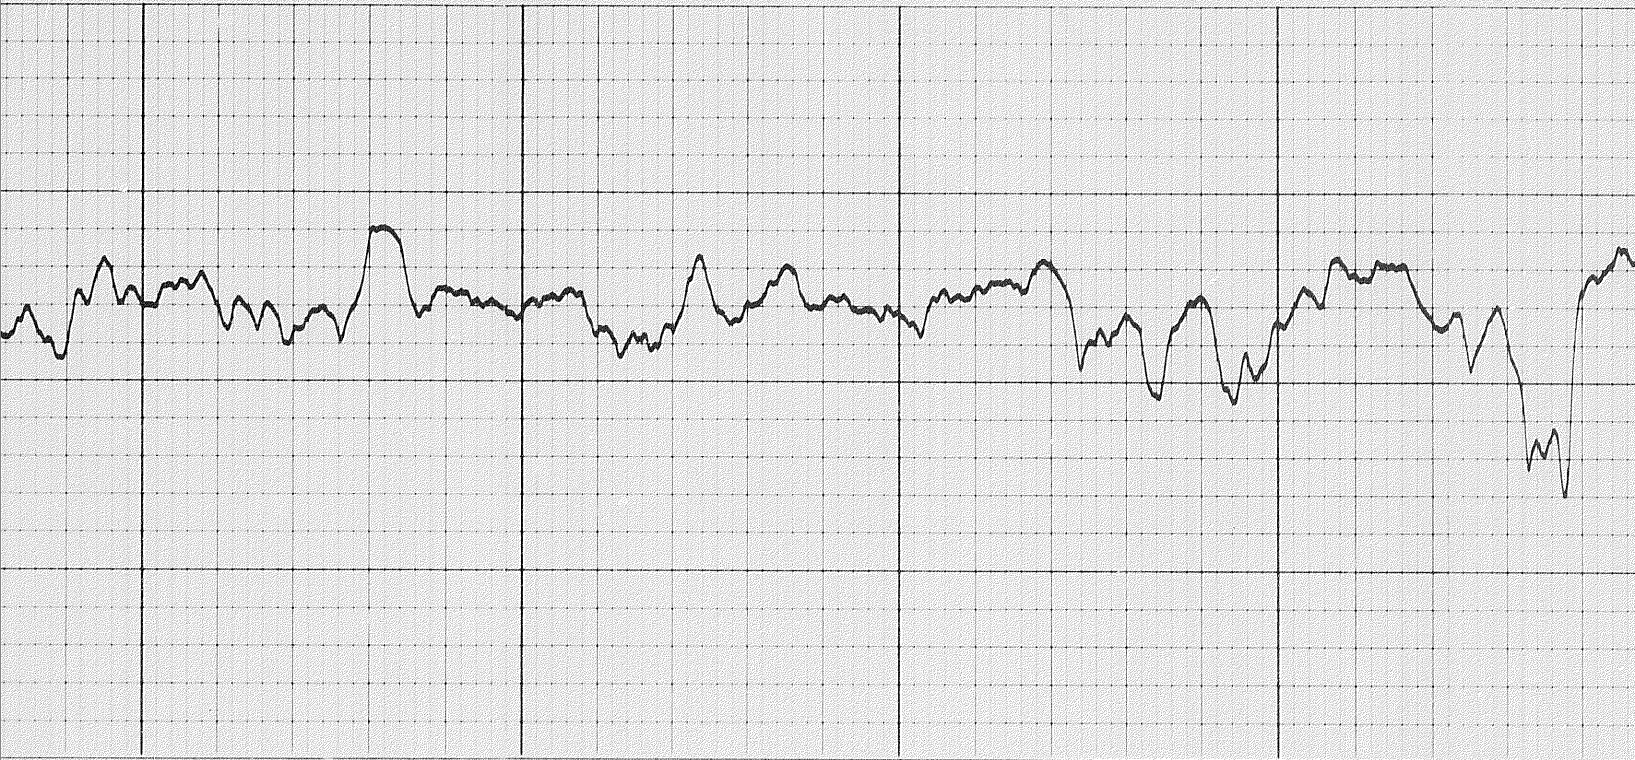


13300

13400

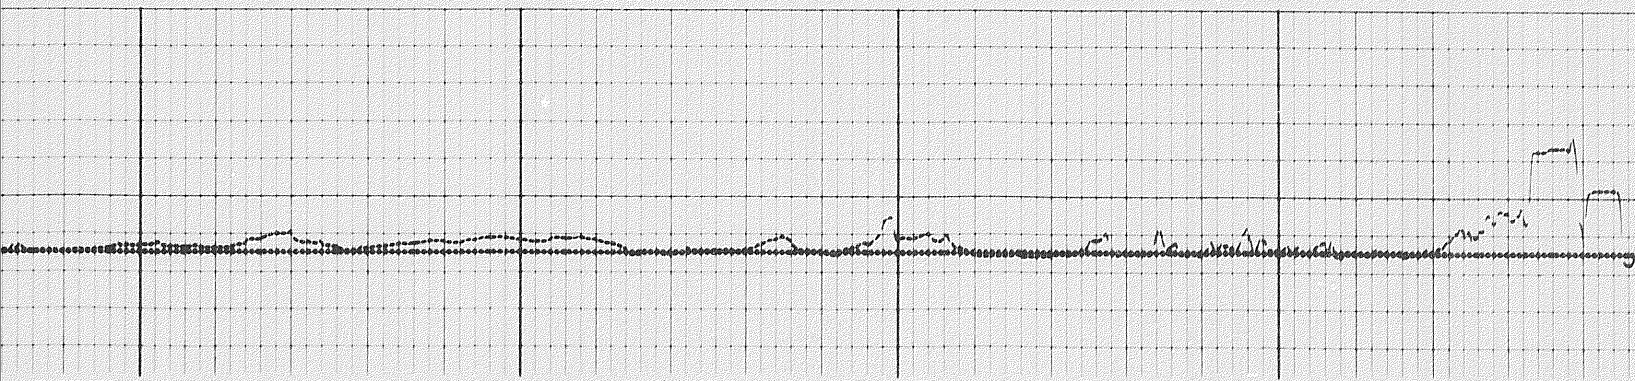


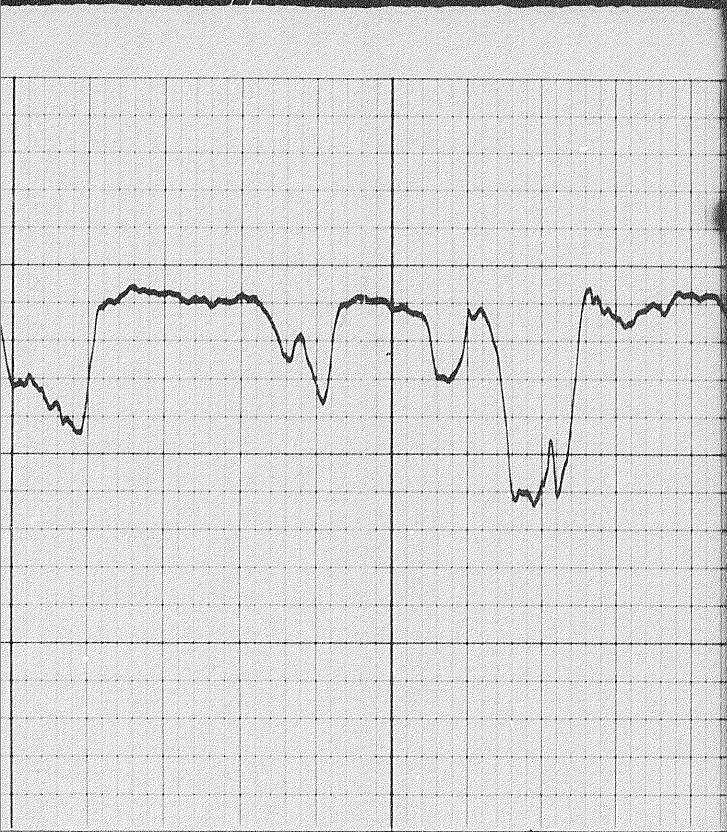


13600

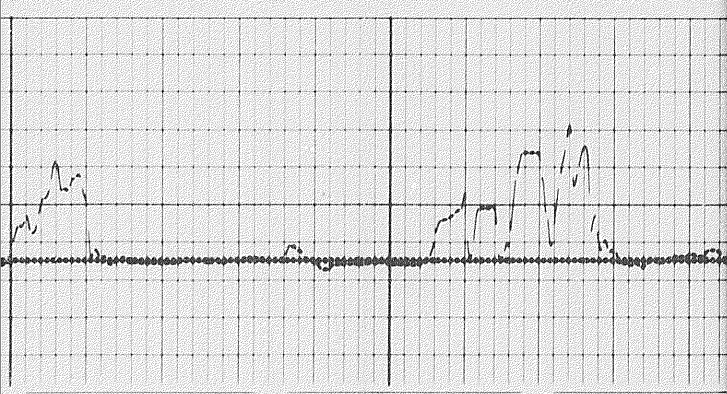

13600

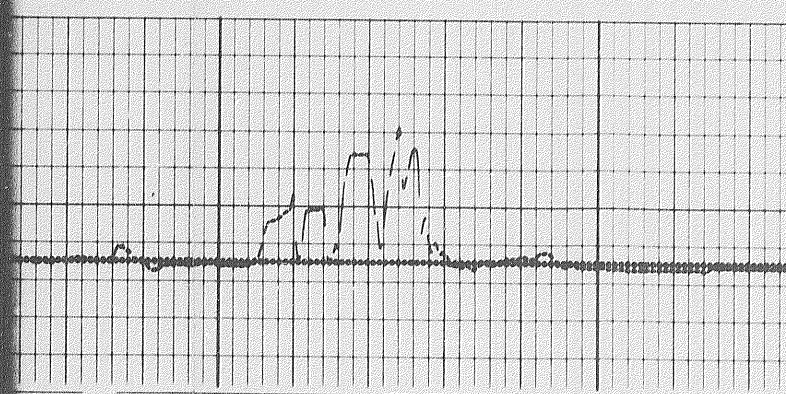


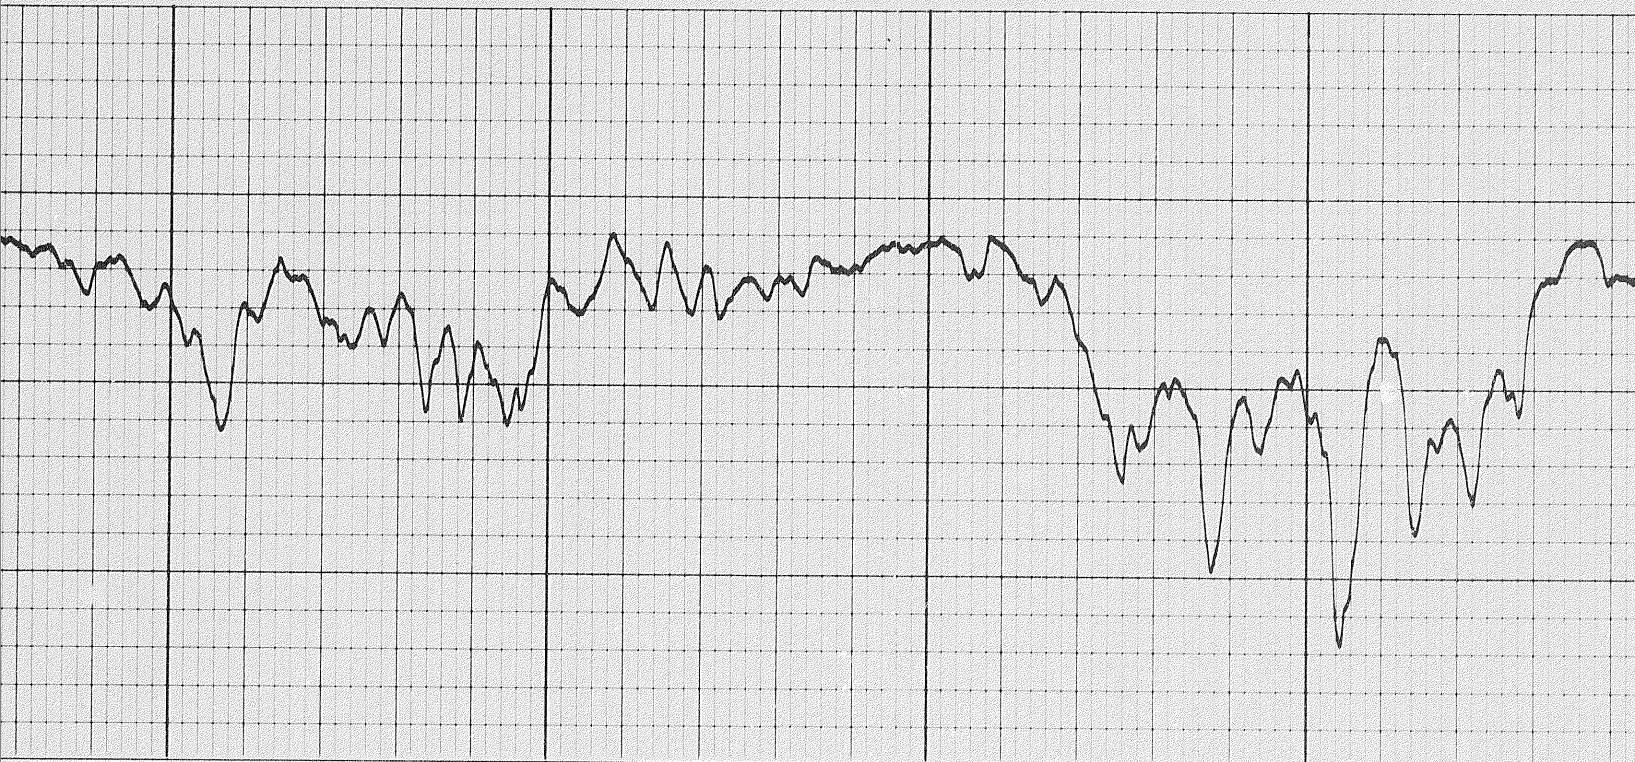

13800


13900




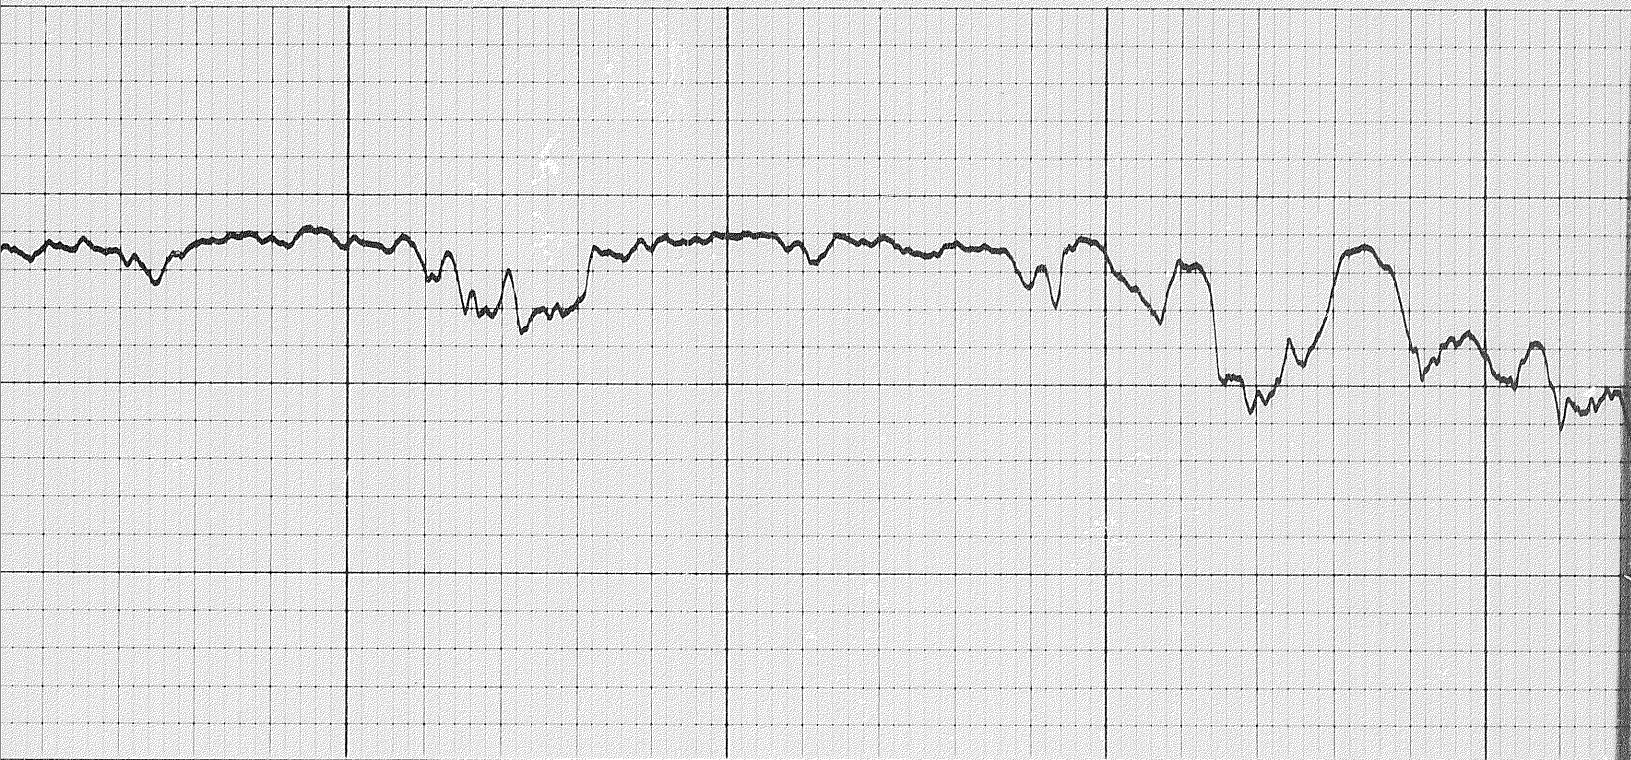

14100

14200

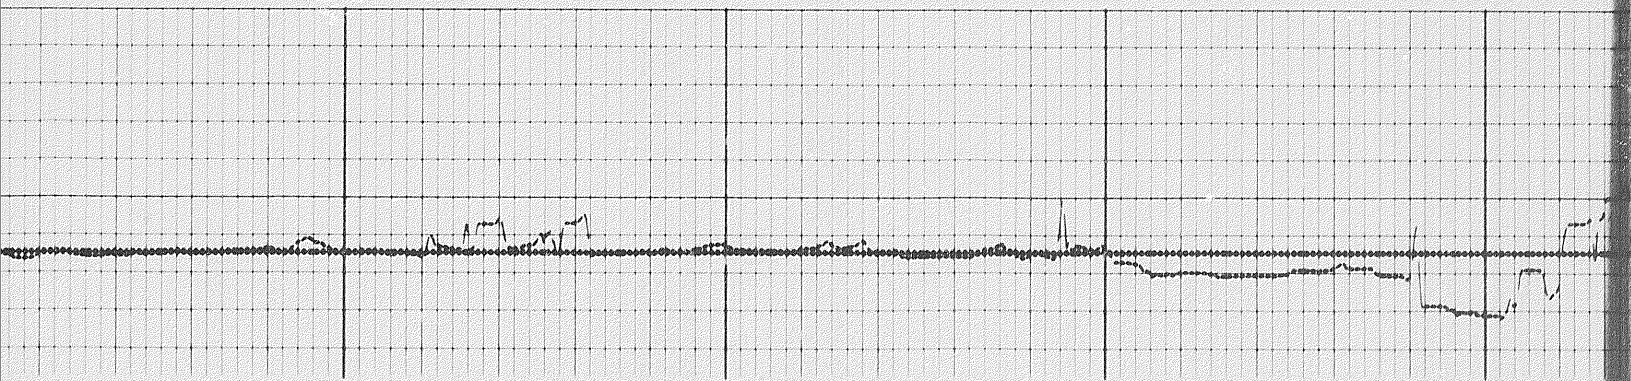

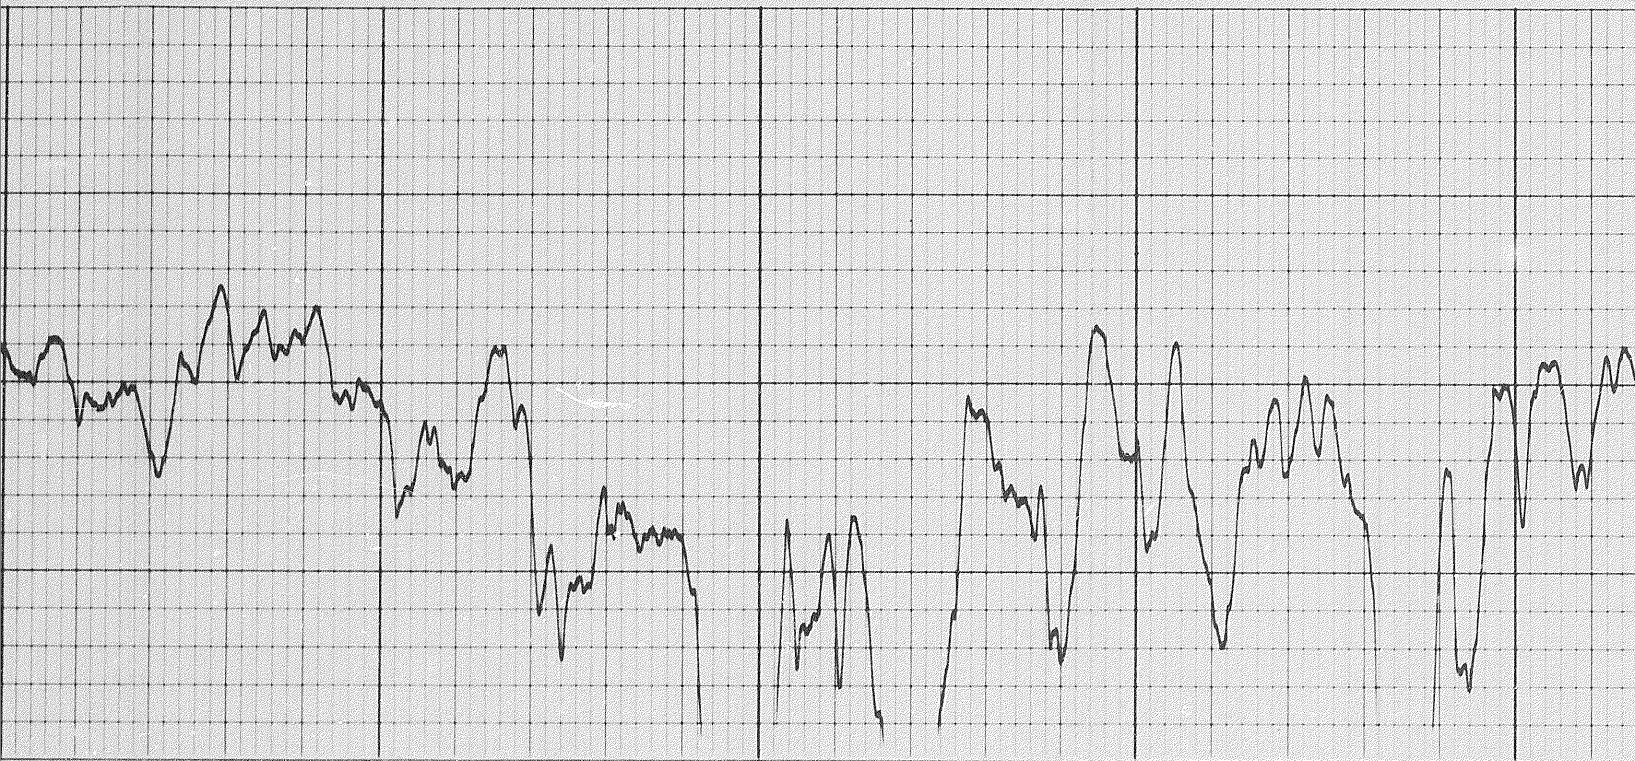


1400

14300

14400



70f

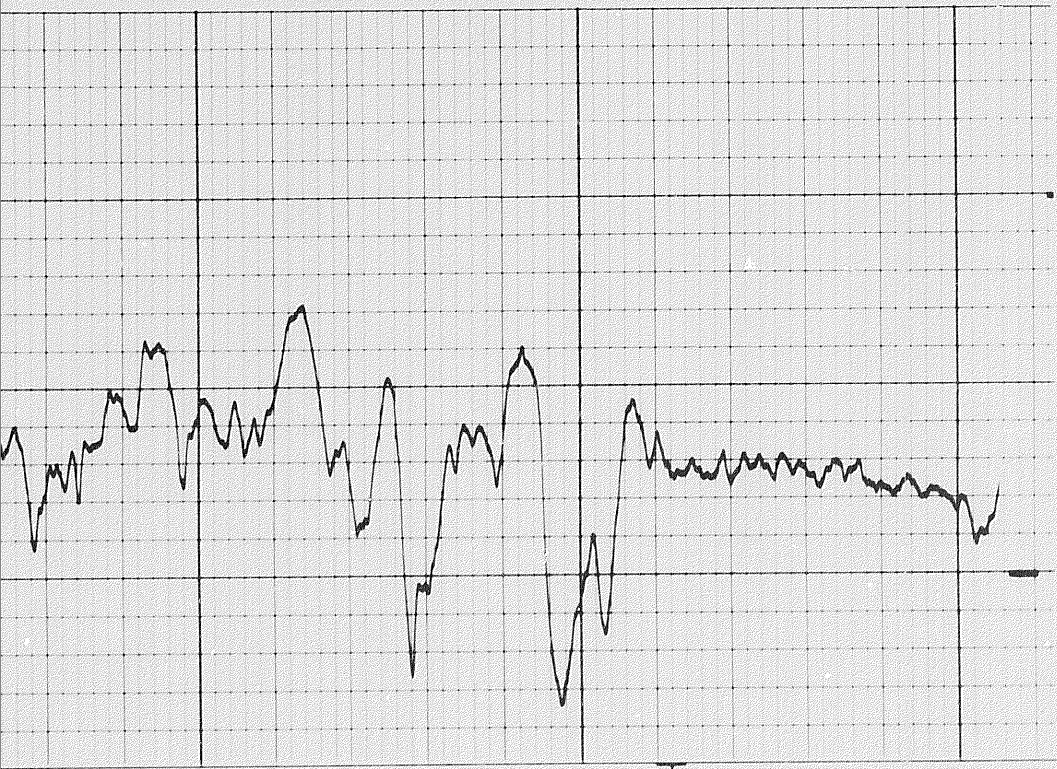



14500


FR

14600





REPEAT SECTION

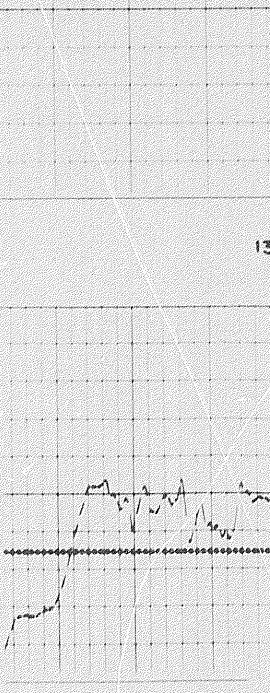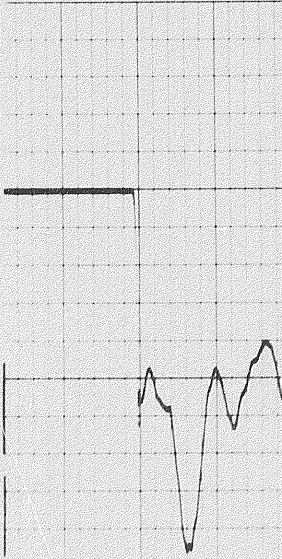


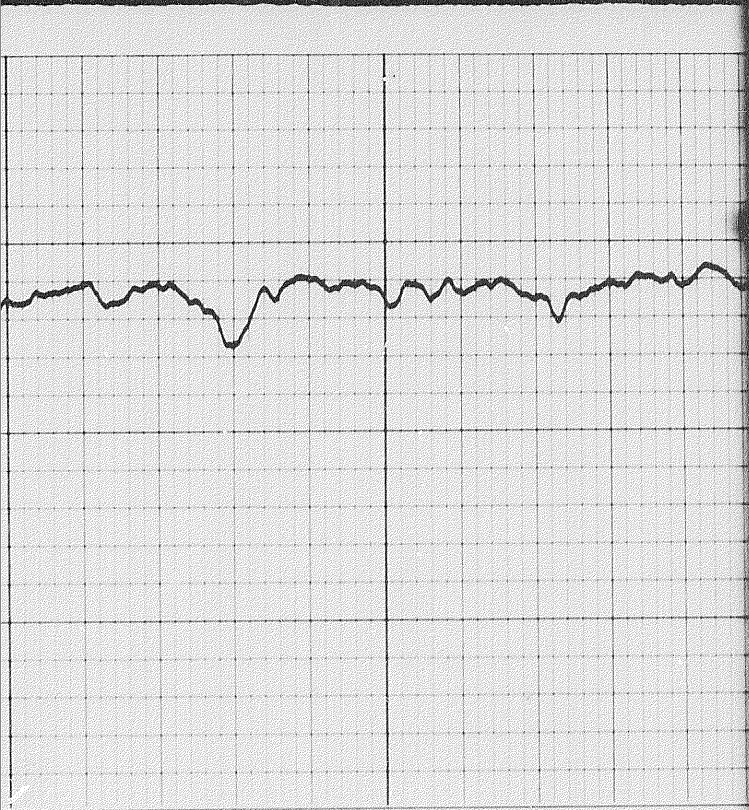


14000

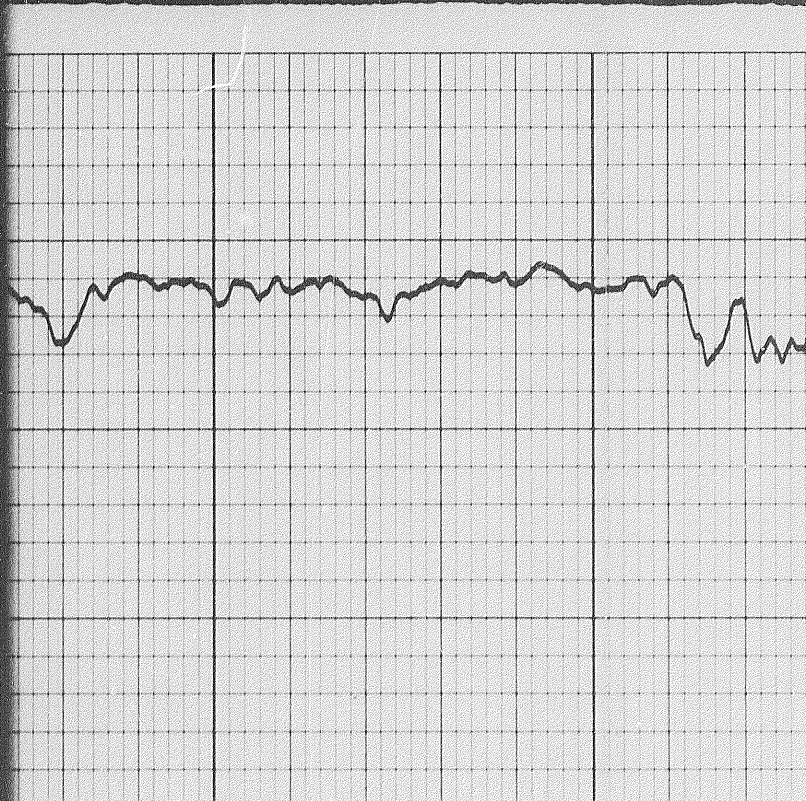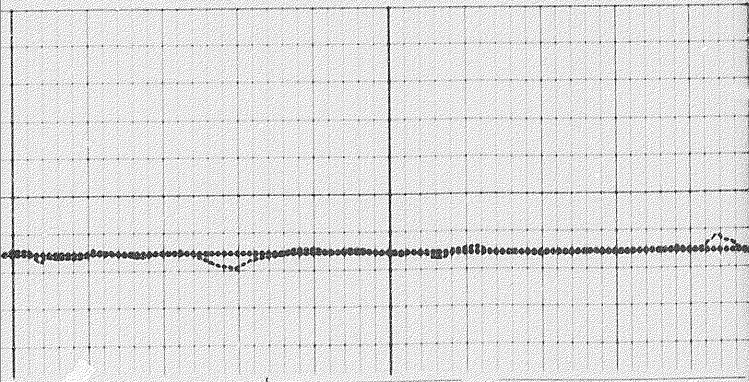


14000


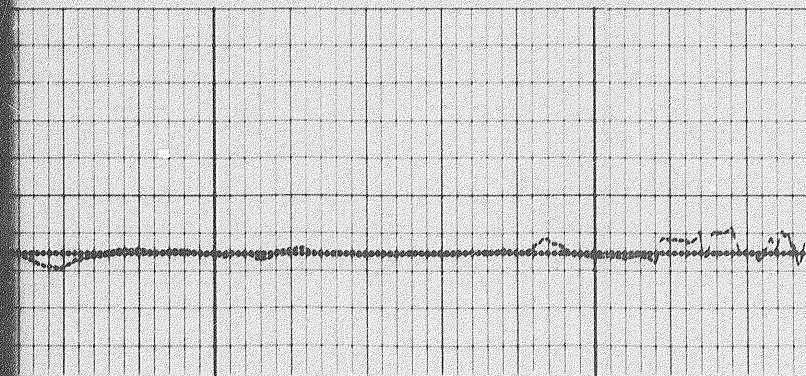


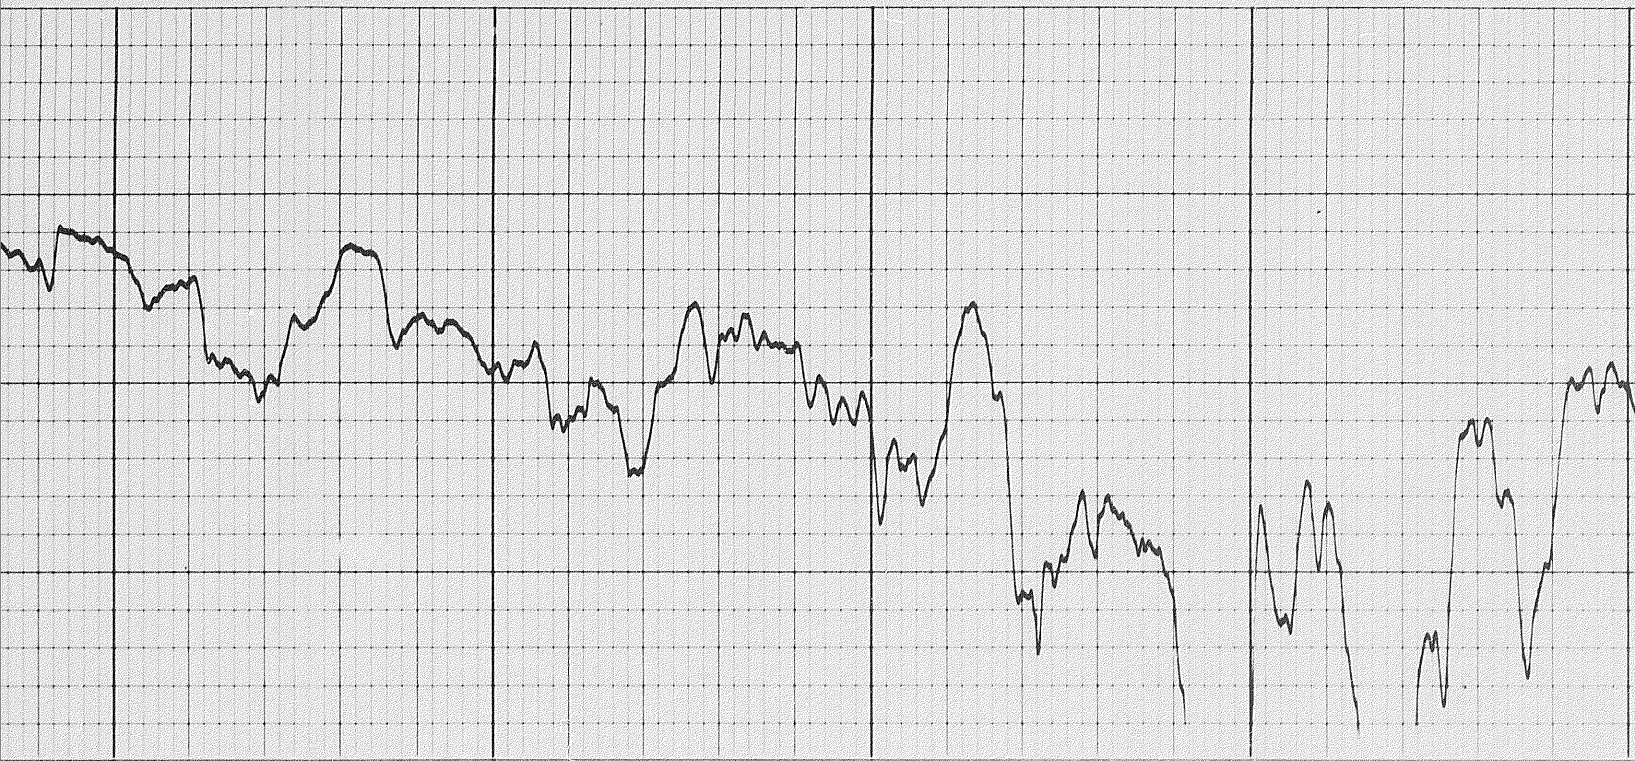

14200

14300

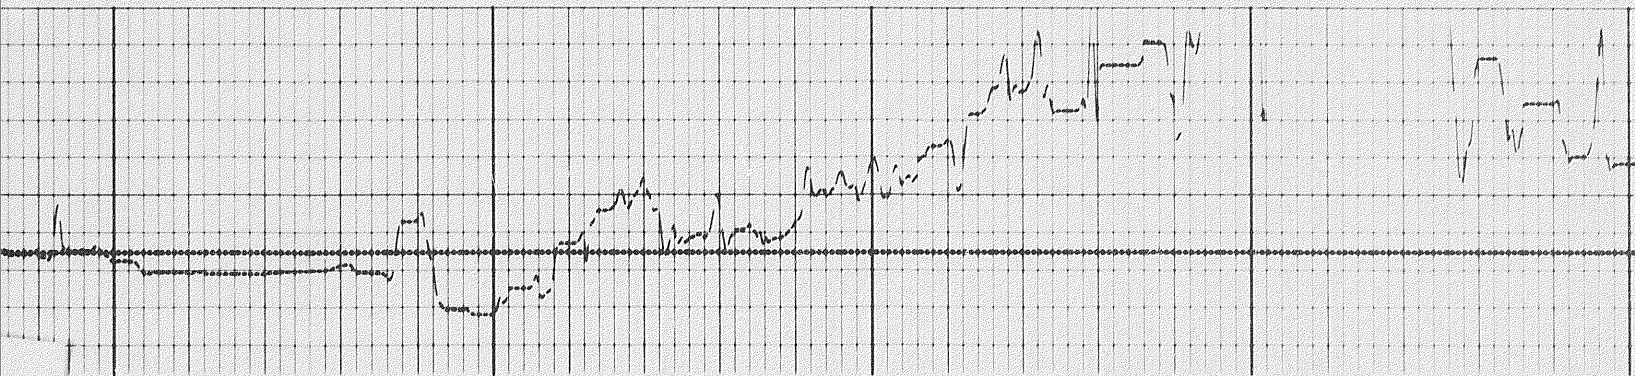

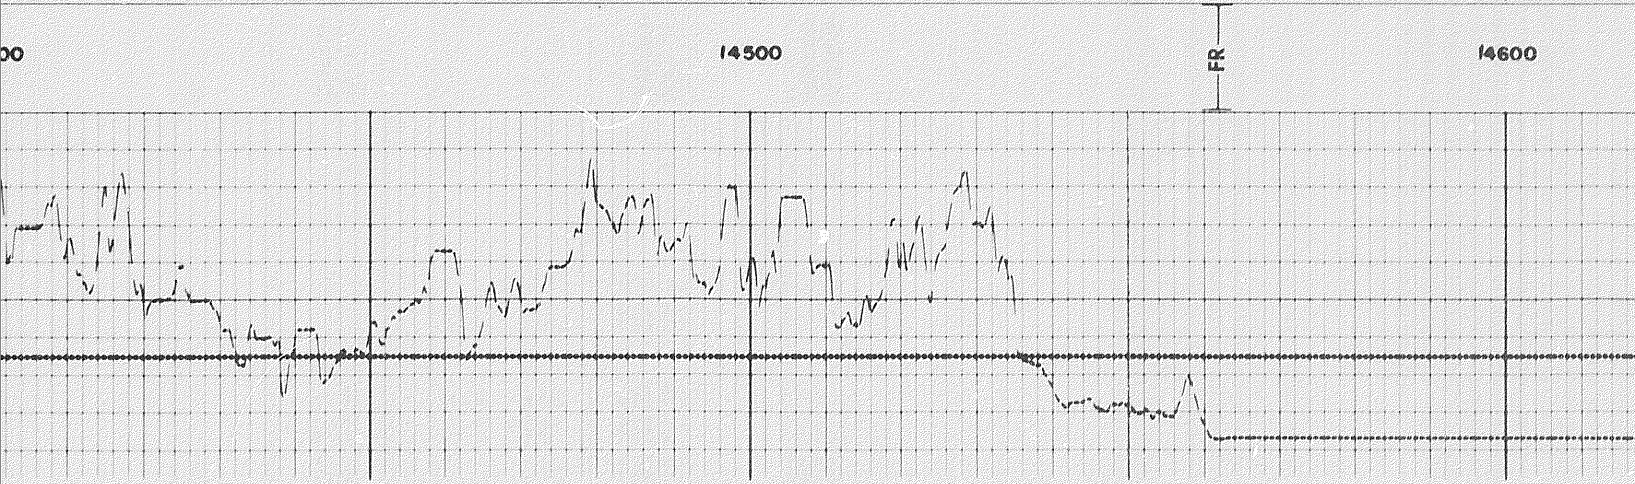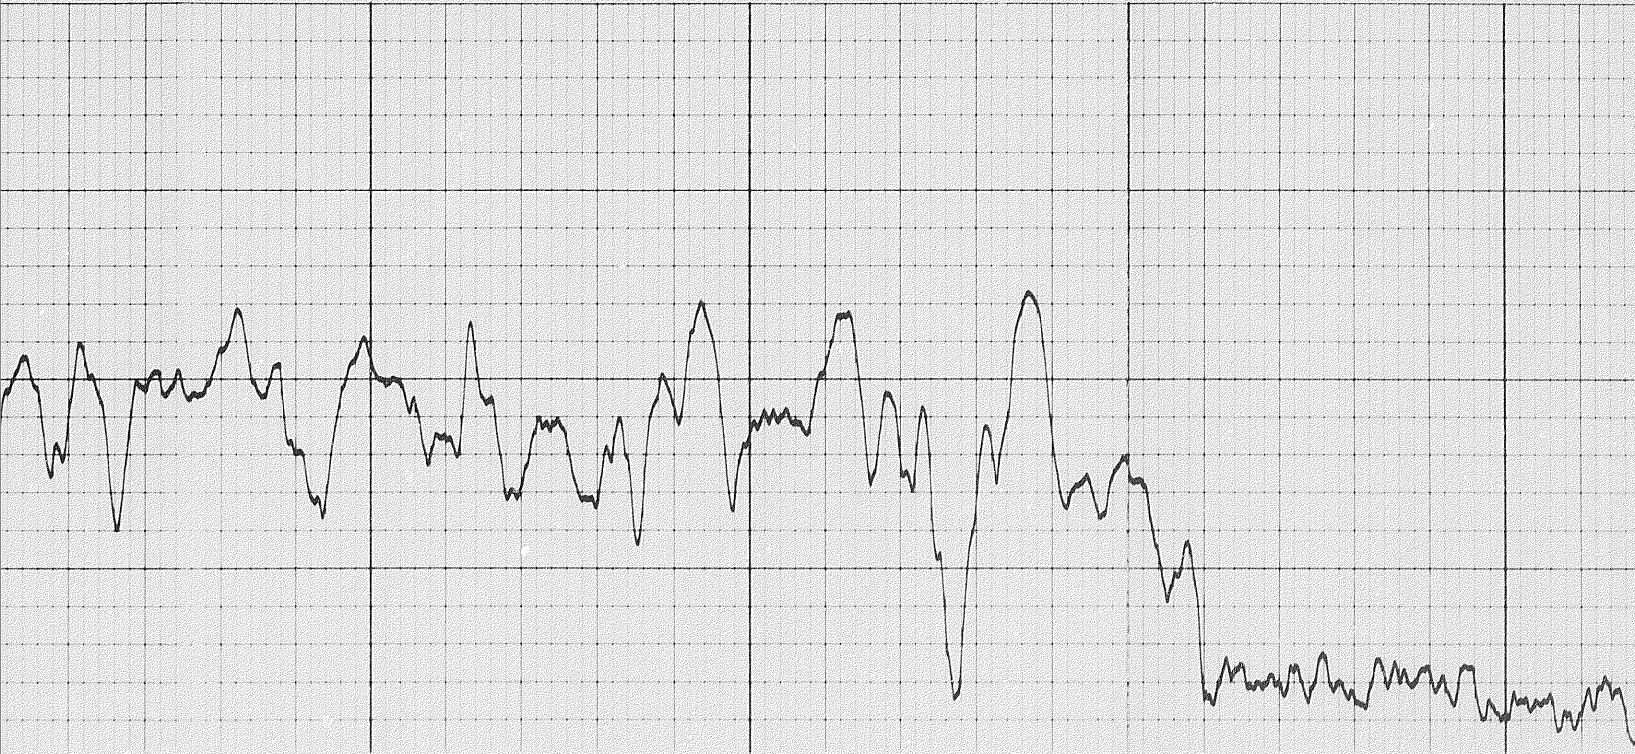


00

14500

PR

14600

9049

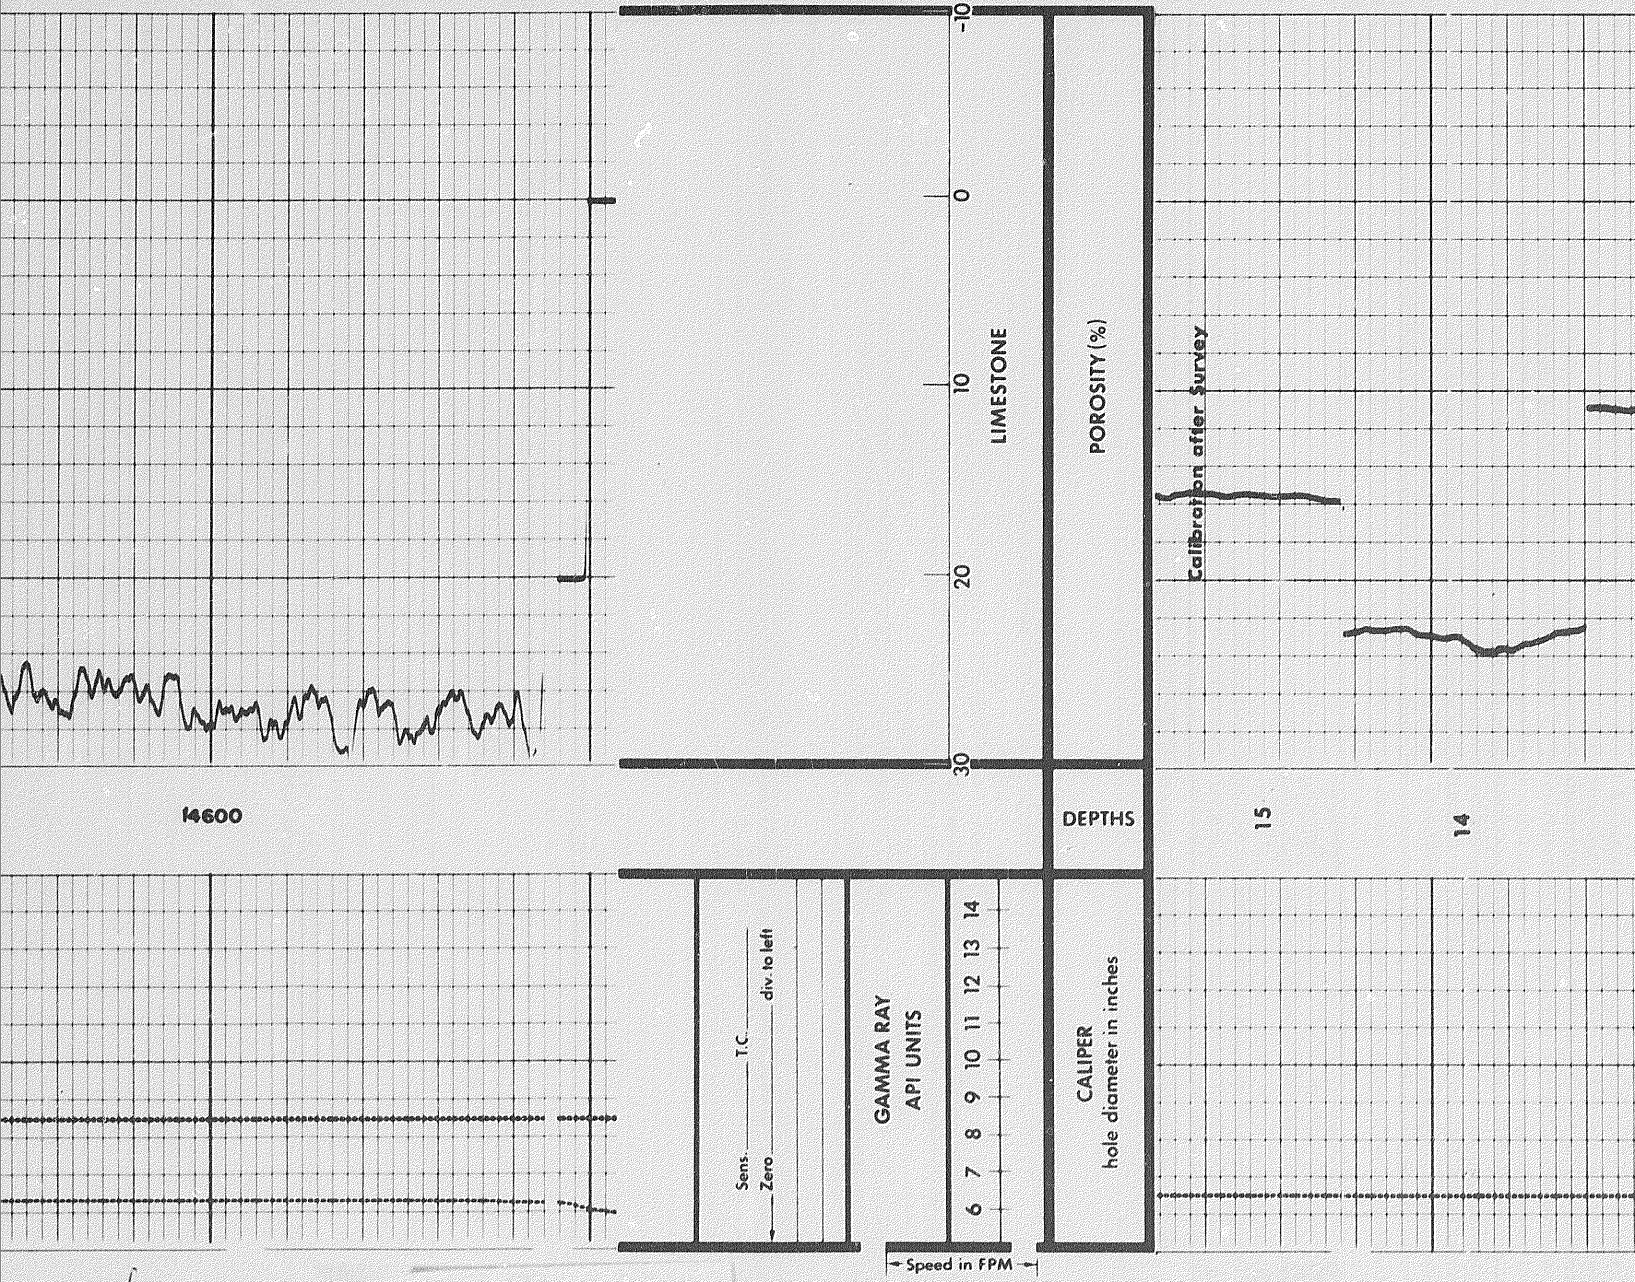

14600

DEPTHS

15

14

Speed in FPM

Sens. T.C. div. to left
Zero


GAMMA RAY
API UNITS

CALIPER
hole diameter in inches

POROSITY (%)

LIMESTONE

Calibration after Survey

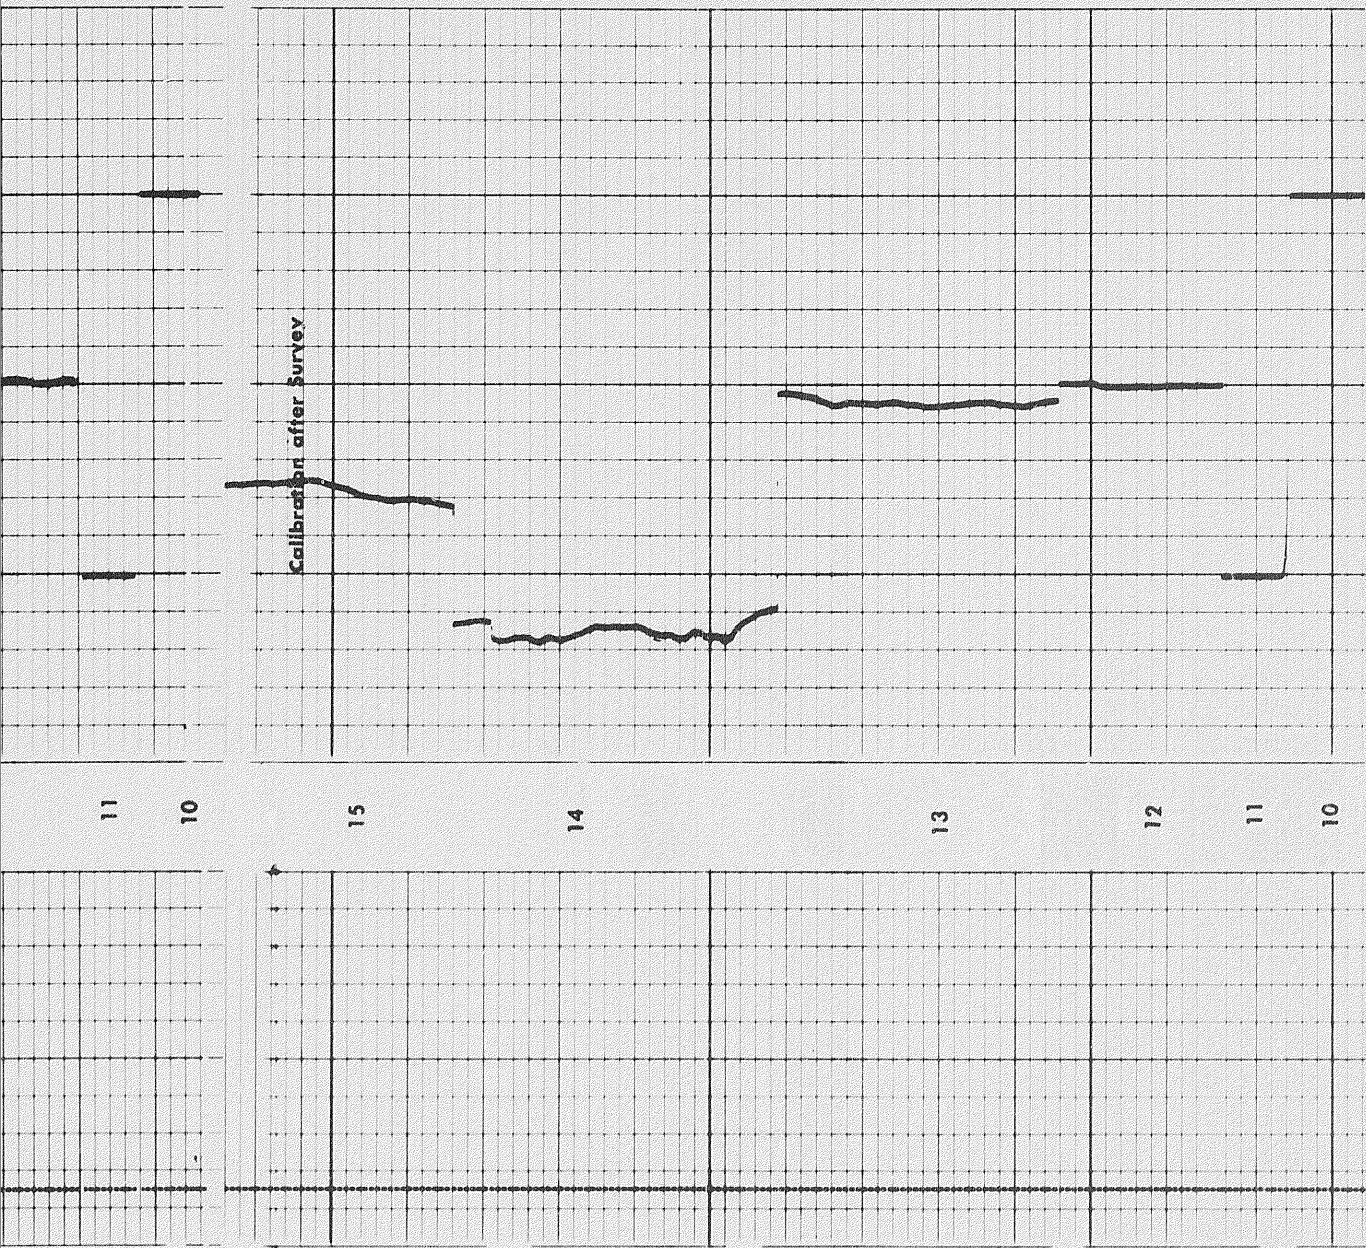

COMPANY

PAN AMERICAN PETROLEUM CORPORATION

WELL

PAN AM BEAVER YT-001

FIELD

BEAVER RIVER

PROVINCE

YUKON TERRITORIES

SCHLUMBERGER